



State of Utah

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

Department of Administrative Services

KIMBERLY K. HOOD
Executive Director

Division of Facilities Construction and Management

F. KEITH STEPAN
Director

ADDENDUM #2

Date: November 30, 2006

To: Contractors

From: Michael A. Ambre, Project Manager, DFCM

Reference: Technology Building Classroom Remodel Level 4
Salt Lake Community College
DFCM Project No. 06057660

Subject: **Addendum No. 2**

Pages	Addendum	1	page
	<u>P+A Architects Drawings/Specs</u>	<u>2</u>	<u>page</u>
	Total	3	pages

Note: This Addendum shall be included as part of the Contract Documents. Items in this Addendum apply to all drawings and specification sections whether referenced or not involving the portion of the work added, deleted, modified, or otherwise addressed in the Addendum. Acknowledge receipt of this Addendum in the space provided on the Bid Form. Failure to do so may subject the Bidder to disqualification.

1.1 SCHEDULE CHANGES – There are no schedule changes per this Addendum.

1.2 GENERAL

Reference the following attachment for changes to the original drawings and specifications.

End of Addendum #2

ADDENDUM NO. 2

Date: November 30th, 2006

PROJECT:

Technology Building Classroom Remodel Level 4
Salt Lake Community College
4600 South Redwood Road
Taylorsville, Utah
DFCM Project No. 06057660

ARCHITECT:

**P+A ARCHITECTS
821 EAST KENSINGTON AVENUE
SALT LAKE CITY, UT 84105**

The original Contract Documents issued for the above noted project are amended as noted in this Addendum. It shall be the sole responsibility of the bidder to appropriately disseminate this information to all concerned prior to the assigned bid time and date, and to coordinate the Addendum with the Contract Documents.

This Addendum consists of a total of **(2) two** 8 1/2"x11" documents, including this page.

If there are still unresolved questions after examining this addendum, please submit those questions via telephone or facsimile as soon as possible so that an addendum can be issued to clarify those issues in a timely manner.

Architectural:

1. See architectural drawing A-DP101, keynote #1 to be changed to read as follows; "General contractor shall remove existing carpet tiles in area of construction and return carpet tiles to owner at location on campus as specified by owner. Carpet tiles shall be stacked in a neat and orderly fashion at specific location. General contractor shall remove all existing glues and prep existing concrete slab prior to placing new carpet as specified."
2. General contractor shall note that the distance from existing concrete floor slab located on level 4 to the top of concrete floor slab on level 5 is 14'-0". The existing floor slab on level 5 consists of double "T" concrete beams that are 2'-0" deep. The general contractor shall note that the new gypsum board walls dividing classroom spaces will need to extend between the webs of the double "T" concrete beam system. See attached addendum drawing 01/AD02 for further clarification.


Mechanical and Plumbing:

1. None:

Electrical:

1. None:

End of Addendum 1

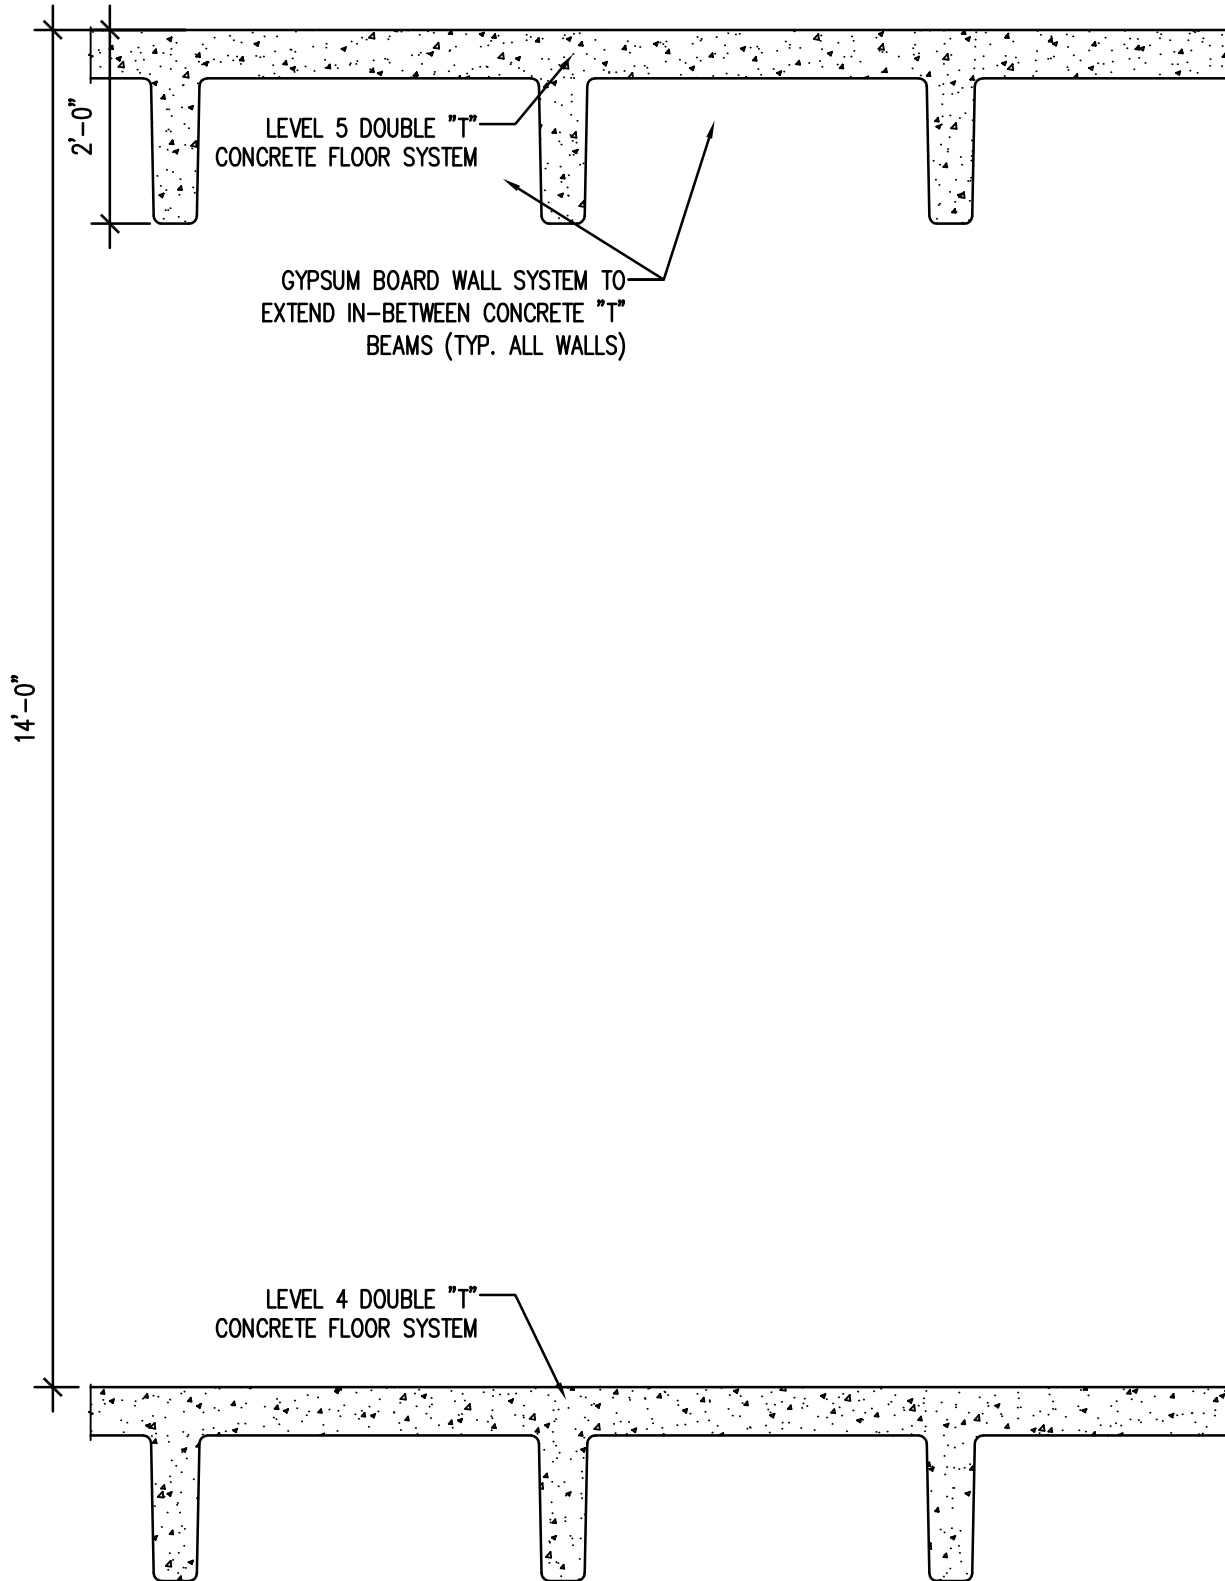

9-01.dwg

01

AD-02

SECTION BETWEEN FLOORS

SCALE

1/2" = 1'-0"