



STATE OF UTAH - DEPARTMENT OF ADMINISTRATIVE SERVICES

Division of Facilities Construction and Management

DFCM

STANDARD LOW BID PROJECT – INVITATIONAL

Project Budgets \$50,000 - \$100,000

May 10, 2007

VERNAL ARMORY PAVING IMPROVMENTS UTAH NATIONAL GUARD VERNAL, UTAH

DFCM Project Number 06093470

Johansen and Tuttle Engineering
P.O. Box 487
Castle Date, Utah 84513-0487

TABLE OF CONTENTS

	<u>Page Numbers</u>
Title Page	1
Table of Contents	2
Invitation to Bid	3
Project Description	4
Project Schedule	5
Bid Form	6
Instructions to Bidders	8
Bid Bond	12
Contractors Sublist Form	13
Fugitive Dust Plan	16
Contractor's Agreement	23
Performance Bond	28
Payment Bond	29
Change Order Form	30
Certificate of Substantial Completion	31
Fairpark Map	

Current copies of the following documents are hereby made part of these contract documents by reference. These documents are available on the DFCM web site at <http://dfcm.utah.gov> or are available upon request from DFCM.

DFCM General Conditions dated May 25, 2005.

DFCM Application and Certification for Payment dated May 25, 2005.

Technical Specifications :

Drawings:

The Agreement and General Conditions dated May 25, 2005 have been updated from versions that were formally adopted and in use prior to this date. The changes made to the General Conditions are identified in a document entitled Revisions to General Conditions that is available on DFCM's web site at <http://dfcm.utah.gov>

INVITATION TO BID

Only firms that have been invited to submit bids on this project are allowed to bid on this project.

Sealed bids will be received by the Division of Facilities Construction and Management (DFCM) for:

VERNAL ARMORY PAVING IMPROVEMENTS

UTAH NATIONAL GUARD, VERNAL, UTAH

DFCM PROJECT NO: 06093470

<u>Company</u>	<u>Contact</u>	<u>Fax</u>
Allred Paving & Rotomill	Larry Allred	435-781-4188
Burdick Paving Corp.	Kerry Farnworth	435-722-2810
Kilgore Paving & Maintenance	Brent Dunkley	801-364-2722
Morgan Pavement Maintenance	Brian Allen	801-416-8061
Geneva Rock Products	Albert Schellenberg	801-281-7939

Bids will be in accordance with the Contract Documents that will be available on Thursday, May 10, 2007, and distributed in electronic format only on CDs from DFCM, at the Wasatch Building at the Utah State Fairpark, approximately 155 North 1000 West, Salt Lake City, Utah and on the DFCM web page at <http://dfcm.utah.gov>. For questions regarding this project, please contact Brent Lloyd, DFCM, at 801-538-3471. No others are to be contacted regarding this bidding process. The construction budget for this project is \$62,000.00.

A **mandatory** pre-bid meeting will be held at 11:00 AM on Tuesday, May 15, 2007 at the Utah National Guard, Vernal Armory, 220 South 500 East, Vernal, Utah. All bidders wishing to bid on this project are required to attend this meeting.

Bids will be received until the hour of 1:45 PM on Wednesday, May 23, 2007 at the Wasatch Building at the Utah State Fairpark, approximately 155 North 1000 West, Salt Lake City, Utah. Refer to the map on the DFCM website for directions (http://dfcm.utah.gov/downloads/fairpark_map.pdf). Bids will be opened and read aloud in the Wasatch Building at the Utah State Fairpark. NOTE: Bids must be received at the Wasatch Building at the Utah State Fairpark by the specified time.

A bid bond in the amount of five percent (5%) of the bid amount, made payable to the Division of Facilities Construction and Management on DFCM's bid bond form, shall accompany the bid.

The Division of Facilities Construction and Management reserves the right to reject any or all bids or to waive any formality or technicality in any bid in the interest of DFCM.

DIVISION OF FACILITIES CONSTRUCTION AND MANAGEMENT

Joanna Fisher, Contract Coordinator

4110 State Office Building, Salt Lake City, Utah 84114

PROJECT DESCRIPTION

Supply and install approximately 25,000 Sq. Ft. of asphalt overlay, including paving fabric and traffic paint striping at the Utah National Guard, Vernal Armory.



STATE OF UTAH - DEPARTMENT OF ADMINISTRATIVE SERVICES

Division of Facilities Construction and Management

DFCM

PROJECT SCHEDULE

PROJECT NAME: Vernal Armory Paving Improvements Utah National Guard – Vernal, Utah DFCM PROJECT NO. 06093470				
Event	Day	Date	Time	Place
Bidding Documents Available	Thursday	May 10, 2007	10:00 AM	Wasatch Building Utah State Fairpark Approx 155 N. 1000 West Salt Lake City, Utah DFCM web site *
Mandatory Pre-bid Site Meeting	Tuesday	May 15, 2007	11:00 AM	Utah National Guard, Vernal Armory, 220 S. 500 E. Vernal, Utah
Last Day to Submit Questions	Wednesday	May 16, 2007	4:00 PM	E-mail to brentlloyd@utah.gov
Prime Contractors Turn In Bid and Bid Bond	Wednesday	May 23, 2007	1:45 PM	Wasatch Building Utah State Fairpark Approx 155 North 1000 West Salt Lake City, UT **
Sub-contractor List Due	Thursday	May 24, 2007	1:45 PM	DFCM 4110 State Office Bldg SLC, UT Fax 801-538-3677
Substantial Completion Date	Wednesday	August 15, 2007		

* NOTE: DFCM's web site address is <http://dfcm.utah.gov>

** Due to the ongoing construction on Capitol Hill and the anticipated shortage of parking during 2007, all bids will be received and opened at the Wasatch Building at the Utah State Fairpark. Refer to map on the DFCM web site for directions (http://dfcm.utah.gov/downloads/fairpark_map.pdf)



STATE OF UTAH - DEPARTMENT OF ADMINISTRATIVE SERVICES

Division of Facilities Construction and Management

DFCM

BID FORM

NAME OF BIDDER _____ DATE _____

To the Division of Facilities Construction and Management
4110 State Office Building
Salt Lake City, Utah 84114

The undersigned, responsive to the "Notice to Contractors" and in accordance with the "Instructions to Bidders", in compliance with your invitation for bids for the Vernal Armory Paving Improvements – Utah National Guard – Vernal, Utah, Project No. 06093470 and having examined the Contract Documents and the site of the proposed Work and being familiar with all of the conditions surrounding the construction of the proposed Project, including the availability of labor, hereby proposes to furnish all labor, materials and supplies as required for the Work in accordance with the Contract Documents as specified and within the time set forth and at the price stated below. This price is to cover all expenses incurred in performing the Work required under the Contract Documents of which this bid is a part:

I/We acknowledge receipt of the following Addenda: _____

For all work shown on the Drawings and described in the Specifications and Contract Documents, I/we agree to perform for the sum of:

_____ DOLLARS (\$_____) (In case of discrepancy, written amount shall govern)

I/We guarantee that the Work will be Substantially Complete by August 15, 2007, should I/we be the successful bidder, and agree to pay liquidated damages in the amount of **\$200.00** per day for each day after expiration of the Contract Time as stated in Article 3 of the Contractor's Agreement.

This bid shall be good for 45 days after bid opening.

Enclosed is a 5% bid bond, as required, in the sum of _____

The undersigned Contractor's License Number for Utah is _____.

Upon receipt of notice of award of this bid, the undersigned agrees to execute the contract within ten (10) days, unless a shorter time is specified in the Contract Documents, and deliver acceptable Performance and Payment bonds in the prescribed form in the amount of 100% of the Contract Sum for faithful performance of the contract.

The Bid Bond attached, in the amount not less than five percent (5%) of the above bid sum, shall become the property of the Division of Facilities Construction and Management as liquidated damages for delay and additional expense caused thereby in the event that the contract is not executed and/or acceptable 100% Performance and Payment bonds are not delivered within the time set forth.

Type of Organization:

(Corporation, Partnership, Individual, etc.)

Any request and information related to Utah Preference Laws:

Respectfully submitted,

Name of Bidder

ADDRESS:

Authorized Signature

INSTRUCTIONS TO BIDDERS

1. Drawings and Specifications, Other Contract Documents

Drawings and Specifications, as well as other available Contract Documents, may be obtained as stated in the Invitation to Bid.

2. Bids

Before submitting a bid, each contractor shall carefully examine the Contract Documents, shall visit the site of the Work; shall fully inform themselves as to all existing conditions and limitations; and shall include in the bid the cost of all items required by the Contract Documents. If the bidder observes that portions of the Contract Documents are at variance with applicable laws, building codes, rules, regulations or contain obvious erroneous or uncoordinated information, the bidder shall promptly notify the DFCM Representative and the necessary changes shall be accomplished by Addendum.

The bid, bearing original signatures, must be typed or handwritten in ink on the Bid Form provided in the procurement documents and submitted in a sealed envelope at the location specified by the Invitation to Bid prior to the deadline for submission of bids.

Bid bond security, in the amount of five percent (5%) of the bid, made payable to the Division of Facilities Construction and Management, shall accompany bid. **THE BID BOND MUST BE ON THE BID BOND FORM PROVIDED IN THE PROCUREMENT DOCUMENTS IN ORDER TO BE CONSIDERED AN ACCEPTABLE BID.**

If the bid bond security is submitted on a bid bond form other than DFCM's required bid bond form, and the bid security meets all other legal requirements, the bidder will be allowed to provide an acceptable bid bond by the close of business on the next business day following notification by DFCM of submission of a defective bid bond security. **NOTE: A cashier's check cannot be used as a substitute for a bid bond.**

3. Contract and Bond

The Contractor's Agreement will be in the form found in the specifications. The Contract Time will be as indicated in the bid. The successful bidder, simultaneously with the execution of the Contract Agreement, will be required to furnish a performance bond and a payment bond, both bearing original signatures, upon the forms provided in the procurement documents. The performance and payment bonds shall be for an amount equal to one hundred percent (100%) of the contract sum and secured from a company that meets the requirements specified in the requisite forms. Any bonding requirements for subcontractors will be specified in the Supplementary General Conditions.

4. Listing of Subcontractors

Listing of Subcontractors shall be as summarized in the “Instructions and Subcontractor’s List Form”, which are included as part of these Contract Documents. The Subcontractors List shall be delivered to DFCM or faxed to DFCM at (801)538-3677 within 24 hours of the bid opening. Requirements for listing additional subcontractors will be listed in the Contract Documents.

DFCM retains the right to audit or take other steps necessary to confirm compliance with requirements for the listing and changing of subcontractors. Any contractor who is found to not be in compliance with these requirements is subject to a debarment hearing and may be debarred from consideration for award of contracts for a period of up to three years.

5. Interpretation of Drawings and Specifications

If any person or entity contemplating submitting a bid is in doubt as to the meaning of any part of the drawings, specifications or other Contract Documents, such person shall submit to the DFCM Project Manager a request for an interpretation thereof. The person or entity submitting the request will be responsible for its prompt delivery. Any interpretation of the proposed documents will be made only by addenda posted on DFCM’s web site at <http://dfcm.utah.gov>. Neither the DFCM nor A/E will be responsible for any other explanations or interpretations of the proposed documents. A/E shall be deemed to refer to the architect or engineer hired by DFCM as the A/E or Consultant for the Project.

6. Addenda

Addenda will be posted on DFCM’s web site at <http://dfcm.utah.gov>. Contractors are responsible for obtaining information contained in each addendum from the web site. Addenda issued prior to the submittal deadline shall become part of the bidding process and must be acknowledged on the bid form. Failure to acknowledge addenda may result in disqualification from bidding.

7. Award of Contract

The Contract will be awarded as soon as possible to the lowest, responsive and responsible bidder, based on the lowest combination of base bid and acceptable prioritized alternates, provided the bid is reasonable, is in the interests of the State of Utah to accept and after applying the Utah Preference Laws in U.C.A. Title 63, Chapter 56. DFCM reserves the right to waive any technicalities or formalities in any bid or in the bidding. Alternates will be accepted on a prioritized basis with Alternate 1 being highest priority, Alternate 2 having second priority, etc.

8. DFCM Contractor Performance Rating

As a contractor completes each DFCM project, DFCM, the architect/engineer and the using agency will evaluate project performance based on the enclosed “DFCM Contractor Performance Rating” form. The ratings issued on this project will not affect this project but may affect the award on future projects.

9. Licensure

The Contractor shall comply with and require all of its subcontractors to comply with the license laws as required by the State of Utah.

10. Right to Reject Bids

DFCM reserves the right to reject any or all Bids.

11. Time is of the Essence

Time is of the essence in regard to all the requirements of the Contract Documents.

12. Withdrawal of Bids

Bids may be withdrawn on written request received from bidder prior to the time fixed for opening. Negligence on the part of the bidder in preparing the bid confers no right for the withdrawal of the bid after it has been opened.

13. Product Approvals

Where reference is made to one or more proprietary products in the Contract Documents, but restrictive descriptive materials of one or more manufacturer(s) is referred to in the Contract Documents, the products of other manufacturers will be accepted, provided they equal or exceed the standards set forth in the drawings and specifications and are compatible with the intent and purpose of the design, subject to the written approval of the A/E. Such written approval must occur prior to the deadline established for the last scheduled addenda to be issued. The A/E's written approval will be in an issued addendum. If the descriptive material is not restrictive, the products of other manufacturers specified will be accepted without prior approval provided they are compatible with the intent and purpose of the design as determined by the A/E.

14. Financial Responsibility of Contractors, Subcontractors and Sub-subcontractors

Contractors shall respond promptly to any inquiry in writing by DFCM to any concern of financial responsibility of the contractor, subcontractor or sub-subcontractor.

15. Debarment

By submitting a bid, the Contractor certifies that neither it nor its principals, including project and site managers, have been, or are under consideration for, debarment or suspension, or any action that would exclude such from participation in a construction contract by any governmental department or agency. If the Contractor cannot certify this statement, attach to the bid a detailed written explanation which must be reviewed and approved by DFCM as part of the requirements for award of the Project.

BID BOND

(Title 63, Chapter 56, U. C. A. 1953, as Amended)

KNOW ALL PERSONS BY THESE PRESENTS:

That _____ hereinafter referred to as the "Principal," and _____, a corporation organized and existing under the laws of the State of _____, with its principal office in the City of _____ and authorized to transact business in this State and U. S. Department of the Treasury Listed, (Circular 570, Companies Holding Certificates of Authority as Acceptable Securities on Federal Bonds and as Acceptable Reinsuring Companies); hereinafter referred to as the "Surety," are held and firmly bound unto the STATE OF UTAH, hereinafter referred to as the "Obligee," in the amount of \$ _____ (5% of the accompanying bid), being the sum of this Bond to which payment the Principal and Surety bind themselves, their heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

THE CONDITION OF THIS OBLIGATION IS SUCH that whereas the Principal has submitted to Obligee the accompanying bid incorporated by reference herein, dated as shown, to enter into a contract in writing for the _____ Project.

NOW, THEREFORE, THE CONDITION OF THE ABOVE OBLIGATION IS SUCH, that if the said principal does not execute a contract and give bond to be approved by the Obligee for the faithful performance thereof within ten (10) days after being notified in writing of such contract to the principal, then the sum of the amount stated above will be forfeited to the State of Utah as liquidated damages and not as a penalty; if the said principal shall execute a contract and give bond to be approved by the Obligee for the faithful performance thereof within ten (10) days after being notified in writing of such contract to the Principal, then this obligation shall be null and void. It is expressly understood and agreed that the liability of the Surety for any and all defaults of the Principal hereunder shall be the full penal sum of this Bond. The Surety, for value received, hereby stipulates and agrees that obligations of the Surety under this Bond shall be for a term of sixty (60) days from actual date of the bid opening.

PROVIDED, HOWEVER, that this Bond is executed pursuant to provisions of Title 63, Chapter 56, Utah Code Annotated, 1953, as amended, and all liabilities on this Bond shall be determined in accordance with said provisions to same extent as if it were copied at length herein.

IN WITNESS WHEREOF, the above bounden parties have executed this instrument under their several seals on the date indicated below, the name and corporate seal of each corporate party being hereto affixed and these presents duly signed by its undersigned representative, pursuant to authority of its governing body.

DATED this _____ day of _____, 20_____.

Principal's name and address (if other than a corporation):

By: _____

Title: _____

Principal's name and address (if a corporation):

By: _____

Title: _____
(Affix Corporate Seal)

Surety's name and address:

By: _____
Attorney-in-Fact (Affix Corporate Seal)

STATE OF _____)
COUNTY OF _____) ss.

On this ____ day of _____, 20_____, personally appeared before me _____, whose identity is personally known to me or proved to me on the basis of satisfactory evidence, and who, being by me duly sworn, did say that he/she is the Attorney-in-fact of the above-named Surety Company, and that he/she is duly authorized to execute the same and has complied in all respects with the laws of Utah in reference to becoming sole surety upon bonds, undertakings and obligations, and that he/she acknowledged to me that as Attorney-in-fact executed the same.

Subscribed and sworn to before me this _____ day of _____, 20_____.

My Commission Expires: _____

Resides at: _____

Agency: _____
Agent: _____
Address: _____
Phone: _____

NOTARY PUBLIC

Approved As To Form: May 25, 2005
By Alan S. Bachman, Asst Attorney General

**Division of Facilities Construction and****INSTRUCTIONS AND SUBCONTRACTORS LIST FORM**

The three low bidders, as well as all other bidders that desire to be considered, are required by law to submit to DFCM within 24 hours of bid opening a list of **ALL** first-tier subcontractors, including the subcontractor's name, bid amount and other information required by Building Board Rule and as stated in these Contract Documents, on the following basis:

PROJECTS UNDER \$500,000 - ALL SUBS \$20,000 OR OVER MUST BE LISTED
PROJECTS \$500,000 OR MORE - ALL SUBS \$35,000 OR OVER MUST BE LISTED

- Any additional subcontractors identified in the bid documents shall also be listed.
- The DFCM Director may not consider any bid submitted by a bidder if the bidder fails to submit a subcontractor list meeting the requirements of State law.
- List subcontractors for base bid as well as the impact on the list that the selection of any alternate may have.
- Bidder may not list more than one subcontractor to perform the same work.
- Bidder must list "Self" if performing work itself.

LICENSURE:

The subcontractor's name, the type of work, the subcontractor's bid amount, and the subcontractor's license number as issued by DOPL, if such license is required under Utah Law, shall be listed. Bidder shall certify that all subcontractors, required to be licensed, are licensed as required by State law. A subcontractor includes a trade contractor or specialty contractor and does not include suppliers who provide only materials, equipment, or supplies to a contractor or subcontractor.

BIDDER LISTING 'SELF' AS PERFORMING THE WORK:

Any bidder that is properly licensed for the particular work and intends to perform that work itself in lieu of a subcontractor that would otherwise be required to be on the subcontractor list, must insert the term 'Self' for that category on the subcontractor list form. Any listing of 'Self' on the sublist form shall also include the amount allocated for that work.

'SPECIAL EXCEPTION':

A bidder may list 'Special Exception' in place of a subcontractor when the bidder intends to obtain a subcontractor to perform the work at a later date because the bidder was unable to obtain a qualified or reasonable bid under the provisions of U.C.A. Section 63A-5-208(4). The bidder shall insert the term 'Special Exception' for that category of work, and shall provide documentation with the subcontractor list describing the bidder's efforts to obtain a bid of a qualified subcontractor at a reasonable cost and why the bidder was unable to obtain a qualified subcontractor bid. The Director must find that the bidder complied in good faith with State law requirements for any 'Special Exception' designation, in order for the bid to be considered. If awarded the contract, the Director shall supervise the bidder's efforts to obtain a qualified subcontractor bid. The amount of the awarded contract may not be adjusted to reflect the actual amount of the subcontractor's bid. Any listing of 'Special Exception' on the sublist form shall also include amount allocated for that work.

INSTRUCTIONS AND SUBCONTRACTORS LIST FORM
Page No. 2

GROUND FOR DISQUALIFICATION:

The Director may not consider any bid submitted by a bidder if the bidder fails to submit a subcontractor list meeting the requirements of State law. Director may withhold awarding the contract to a particular bidder if one or more of the proposed subcontractors are considered by the Director to be unqualified to do the Work or for such other reason in the best interest of the State of Utah. Notwithstanding any other provision in these instructions, if there is a good faith error on the sublist form, at the sole discretion of the Director, the Director may provide notice to the contractor and the contractor shall have 24 hours to submit the correction to the Director. If such correction is submitted timely, then the sublist requirements shall be considered met.

CHANGES OF SUBCONTRACTORS SPECIFICALLY IDENTIFIED ON SUBLIST FORM:

Subsequent to twenty-four hours after the bid opening, the contractor may change its listed subcontractors only after receiving written permission from the Director based on complying with all of the following criteria.

- (1) The contractor has established in writing that the change is in the best interest of the State and that the contractor establishes an appropriate reason for the change, which may include, but not is not limited to, the following reasons: the original subcontractor has failed to perform, or is not qualified or capable of performing, and/or the subcontractor has requested in writing to be released.
- (2) The circumstances related to the request for the change do not indicate any bad faith in the original listing of the subcontractors.
- (3) Any requirement set forth by the Director to ensure that the process used to select a new subcontractor does not give rise to bid shopping.
- (4) Any increase in the cost of the subject subcontractor work is borne by the contractor.
- (5) Any decrease in the cost of the subject subcontractor work shall result in a deductive change order being issued for the contract for such decreased amount.
- (6) The Director will give substantial weight to whether the subcontractor has consented in writing to being removed unless the Contractor establishes that the subcontractor is not qualified for the work.

EXAMPLE:

Example of a list where there are only four subcontractors:

TYPE OF WORK	SUBCONTRACTOR, "SELF" OR "SPECIAL EXCEPTION"	SUBCONTRACTOR BID AMOUNT	CONT. LICENSE #
ELECTRICAL	ABCD Electric Inc.	\$350,000.00	123456789000
LANDSCAPING	"Self"	300,000.00	123456789000
CONCRETE (ALTERNATE #1)	XYZ Concrete Inc	298,000.00	987654321000
MECHANICAL	"Special Exception" (attach documentation)	Fixed at: 350,000.00	(TO BE PROVIDED AFTER OBTAINING SUBCONTRACTOR)

**PURSUANT TO STATE LAW - SUBCONTRACTOR BID AMOUNTS CONTAINED IN THIS
SUBCONTRACTOR LIST SHALL NOT BE DISCLOSED UNTIL THE CONTRACT HAS BEEN AWARDED.**

**SUBCONTRACTORS LIST**

FAX TO 801-538-3677

PROJECT TITLE: _____

Caution: You must read and comply fully with instructions.

TYPE OF WORK	SUBCONTRACTOR, "SELF" OR "SPECIAL EXCEPTION"	SUBCONTRACTOR BID AMOUNT	CONT. LICENSE #

We certify that:

1. This list includes all subcontractors as required by the instructions, including those related to the base bid as well as any alternates.
2. We have listed "Self" or "Special Exception" in accordance with the instructions.
3. All subcontractors are appropriately licensed as required by State law.

FIRM: _____

DATE: _____

SIGNED BY: _____

NOTICE: FAILURE TO SUBMIT THIS FORM, PROPERLY COMPLETED AND SIGNED, AS REQUIRED IN THESE CONTRACT DOCUMENTS, SHALL BE GROUNDS FOR DFCMS REFUSAL TO ENTER INTO A WRITTEN CONTRACT WITH BIDDER. ACTION MAY BE TAKEN AGAINST BIDDERS BID BOND AS DEEMED APPROPRIATE BY DFCM. ATTACH A SECOND PAGE IF NECESSARY.

FUGITIVE DUST PLAN

The Contractor will fill out the form and file the original with the Division of Air Quality and a copy of the form with the Division of Facilities Construction & Management, prior to the issuance of any notice to proceed.

The Contractor will be fully responsible for compliance with the Fugitive Dust Control Plan, including the adequacy of the plan, any damages, fines, liability, and penalty or other action that results from noncompliance.

Utah Division of Air Quality

April 20, 1999

**GUIDANCE THAT MUST BE CONSIDERED IN DEVELOPING AND SUBMITTING A
DUST CONTROL PLAN FOR COMPLIANCE WITH R307-309-3, 4, 5, 6, 7**

Source Information:

1. Name of your operation (source): provide a name if the source is a construction site.
2. Address or location of your operation or construction site.
3. UTM coordinates or Longitude/Latitude of stationary emission points at your operation.
4. Lengths of the project, if temporary (time period).
5. Description of process (include all sources of dust and fugitive dust). Please, if necessary, use additional sheets of paper for this description. Be sure to mark it as an attachment.
6. Type of material processed or disturbed.
7. Amount of material processed (tons per year, tons per month, lbs./hr., and applicable units).

8. Destination of product (where will the material produced be used or transported, be specific, provide address or specific location), information needed for temporary relocation applicants.
9. Identify the individual who is responsible for the implementation and maintenance of fugitive dust control measures. List name(s), position(s) and telephone number(s).
10. List, and attach copies of any contract lease, liability agreement with other companies that may, or will, be responsible for dust control on site or on the project.

Description of Fugitive Dust Emission Activities
(Things to consider in addressing fugitive dust control strategies.)

1. Type of activities (drilling and blasting, road construction, development construction, earth moving and excavation, handling and hauling materials, cleaning and leveling, etc).
2. List type of equipment generating the fugitive dust.
3. Diagram the location of each activity or piece of equipment on site. Please attach the diagram.
4. Provide pictures or drawings of each activity. Include a drawing of the unpaved/paved road network used to move loads “on” and “off” property.
5. Vehicle miles travels on unpaved roads associated with the activity (average speed).
6. Type of dust emitted at each source (coal, cement, sand, soil, clay, dust, etc.)
7. Estimate the size of the release area at which the activity occurs (square miles). For haul or dirt roads include total miles of road in use during the activity.

Description of Fugitive Dust Emission Controls on Site

Control strategies must be designed to meet 20% opacity or less on site (a lesser opacity may be defined by Approval Order conditions or federal requirements such as NSPS), and control strategies must prevent exceeding 10% opacity from fugitive dust at the property boundary (site boundary) for compliance with R307-309-3.

1. Types of ongoing emission controls proposed for each activity, each piece of equipment, and haul roads.
2. Types of additional dust controls proposed for bare, exposed surfaces (chemical stabilization, synthetic cover, wind breaks, vegetative cover, etc).
3. Method of application of dust suppressant.
4. Frequency of application of dust suppressant.
5. Explain what triggers the use of a special control measure other than routine measures already in place, such as covered loads or measures covered by a permit condition (increase in opacity, high winds, citizen complaints, dry conditions, etc).
6. Explain in detail what control strategies/measures will be implemented off-hours, i.e., Saturdays/Sundays/Holidays, as well as 6 PM to 6 AM each day.

Description of Fugitive Dust Control Off-site

Prevent, to the maximum extent possible, deposition of materials, which may create fugitive dust on public and private paved roads in compliance with R307-309-5, 6, 7.

1. Types of emission controls initiated by your operation that are in place “off” property (application of water, covered loads, sweeping roads, vehicle cleaning, etc.).

2. Proposed remedial controls that will be initiated promptly if materials, which may create fugitive dust, are deposited on public and private paved roads.

Submit the Dust Control Plan to:

Executive Secretary
Utah Air Quality Board
POB 144820
15 North 1950 West
Salt Lake City, Utah 84114-4820

Phone: (801) 536-4000
FAX: (801) 536-4099

Fugitive Dust Control Plan Violation Report

When a source is found in violation of R307-309-3 or in violation of the Fugitive Dust Control Plan, the source must submit a report to the Executive Secretary within 15 days after receiving a Notice of Violation. The report must include the following information:

1. Name and address of dust source.
2. Time and duration of dust episode.
3. Meteorological conditions during the dust episode.
4. Total number and type of fugitive dust activities and dust producing equipment within each operation boundary. If no change has occurred from the existing dust control plan, the source should state that the activity/equipment is the same.
5. Fugitive dust activities or dust producing equipment that caused a violation of R-307-309-3 or the source's dust control plan.
6. Reasons for failing to control dust from the dust generating activity or equipment.
7. New and/or additional fugitive dust control strategies necessary to achieve compliance with R307-309-3, 4, 5, 6, or 7.
8. If it can not be demonstrated that the current approved Dust Control Plan can result in compliance with R307-309-3 through 7, the Dust Control Plan must be revised so as to demonstrate compliance with 307-309-3 through 7. Within 30 days of receiving a fugitive dust Notice of Violation, the source must submit the revised Plan to the Executive Secretary for review and approval.

Submit the Dust Control Plan to:

Executive Secretary	Phone: (801) 536-4000
Utah Air Quality Board	FAX: (801) 536-4099
POB 144820	
15 North 1950 West	
Salt Lake City, Utah 84114-4820	

Attachments: DFCM Form FDR R-307-309, Rule 307-309

CONTRACTOR'S AGREEMENT

FOR:

THIS CONTRACTOR'S AGREEMENT, made and entered into this ____ day of _____, 20__, by and between the DIVISION OF FACILITIES CONSTRUCTION AND MANAGEMENT, hereinafter referred to as "DFCM", and _____, incorporated in the State of _____ and authorized to do business in the State of Utah, hereinafter referred to as "Contractor", whose address is _____.

WITNESSETH: WHEREAS, DFCM intends to have Work performed at _____.

WHEREAS, Contractor agrees to perform the Work for the sum stated herein.

NOW, THEREFORE, DFCM and Contractor for the consideration provided in this Contractor's Agreement, agree as follows:

ARTICLE 1. SCOPE OF WORK. The Work to be performed shall be in accordance with the Contract Documents prepared by _____ and entitled "_____"

The DFCM General Conditions ("General Conditions") dated May 25, 2005 on file at the office of DFCM and available on the DFCM website, are hereby incorporated by reference as part of this Agreement and are included in the specifications for this Project. All terms used in this Contractor's Agreement shall be as defined in the Contract Documents, and in particular, the General Conditions.

The Contractor Agrees to furnish labor, materials and equipment to complete the Work as required in the Contract Documents which are hereby incorporated by reference. It is understood and agreed by the parties hereto that all Work shall be performed as required in the Contract Documents and shall be subject to inspection and approval of DFCM or its authorized representative. The relationship of the Contractor to the DFCM hereunder is that of an independent Contractor.

ARTICLE 2. CONTRACT SUM. The DFCM agrees to pay and the Contractor agrees to accept in full performance of this Contractor's Agreement, the sum of _____ DOLLARS AND NO CENTS (\$_____.00), which is the base bid, and which sum also includes the cost of a 100% Performance Bond and a 100%

CONTRACTOR'S AGREEMENT
PAGE NO. 2

Payment Bond as well as all insurance requirements of the Contractor. Said bonds have already been posted by the Contractor pursuant to State law. The required proof of insurance certificates have been delivered to DFCM in accordance with the General Conditions before the execution of this Contractor's Agreement.

ARTICLE 3. TIME OF COMPLETION AND DELAY REMEDY. The Work shall be Substantially Complete by _____. Contractor agrees to pay liquidated damages in the amount of \$_____ per day for each day after expiration of the Contract Time until the Contractor achieves Substantial Completion in accordance with the Contract Documents, if Contractor's delay makes the damages applicable. The provision for liquidated damages is: (a) to compensate the DFCM for delay only; (b) is provided for herein because actual damages can not be readily ascertained at the time of execution of this Contractor's Agreement; (c) is not a penalty; and (d) shall not prevent the DFCM from maintaining Claims for other non-delay damages, such as costs to complete or remedy defective Work.

No action shall be maintained by the Contractor, including its or Subcontractor or suppliers at any tier, against the DFCM or State of Utah for damages or other claims due to losses attributable to hindrances or delays from any cause whatsoever, including acts and omissions of the DFCM or its officers, employees or agents, except as expressly provided in the General Conditions. The Contractor may receive a written extension of time, signed by the DFCM, in which to complete the Work under this Contractor's Agreement in accordance with the General Conditions.

ARTICLE 4. CONTRACT DOCUMENTS. The Contract Documents consist of this Contractor's Agreement, the Conditions of the Contract (DFCM General Conditions, Supplementary and other Conditions), the Drawings, Specifications, Addenda and Modifications. The Contract Documents shall also include the bidding documents, including the Invitation to Bid, Instructions to Bidders/ Proposers and the Bid/Proposal, to the extent not in conflict therewith and other documents and oral presentations that are documented as an attachment to the contract.

All such documents are hereby incorporated by reference herein. Any reference in this Contractor's Agreement to certain provisions of the Contract Documents shall in no way be construed as to lessen the importance or applicability of any other provisions of the Contract Documents.

ARTICLE 5. PAYMENT. The DFCM agrees to pay the Contractor from time to time as the Work progresses, but not more than once each month after the date of Notice to Proceed, and only upon Certificate of the A/E for Work performed during the preceding calendar month, ninety-five percent (95%) of the value of the labor performed and ninety-five percent (95%) of the value of materials furnished in place or on the site. The Contractor agrees to furnish to the DFCM invoices for materials purchased and on the site but not installed, for which the Contractor requests payment and agrees to

safeguard and protect such equipment or materials and is responsible for safekeeping thereof and if such be stolen, lost or destroyed, to replace same.

Such evidence of labor performed and materials furnished as the DFCM may reasonably require shall be supplied by the Contractor at the time of request for Certificate of Payment on account. Materials for which payment has been made cannot be removed from the job site without DFCM's written approval. Five percent (5%) of the earned amount shall be retained from each monthly payment. The retainage, including any additional retainage imposed and the release of any retainage, shall be in accordance with UCA 13-8-5 as amended. Contractor shall also comply with the requirements of UCA 13-8-5, including restrictions of retainage regarding subcontractors and the distribution of interest earned on the retention proceeds. The DFCM shall not be responsible for enforcing the Contractor's obligations under State law in fulfilling the retention law requirements with subcontractors at any tier.

ARTICLE 6. INDEBTEDNESS. Before final payment is made, the Contractor must submit evidence satisfactory to the DFCM that all payrolls, materials bills, subcontracts at any tier and outstanding indebtedness in connection with the Work have been properly paid. Final Payment will be made after receipt of said evidence, final acceptance of the Work by the DFCM as well as compliance with the applicable provisions of the General Conditions.

Contractor shall respond immediately to any inquiry in writing by DFCM as to any concern of financial responsibility and DFCM reserves the right to request any waivers, releases or bonds from Contractor in regard to any rights of Subcontractors (including suppliers) at any tier or any third parties prior to any payment by DFCM to Contractor.

ARTICLE 7. ADDITIONAL WORK. It is understood and agreed by the parties hereto that no money will be paid to the Contractor for additional labor or materials furnished unless a new contract in writing or a Modification hereof in accordance with the General Conditions and the Contract Documents for such additional labor or materials has been executed. The DFCM specifically reserves the right to modify or amend this Contractor's Agreement and the total sum due hereunder either by enlarging or restricting the scope of the Work.

ARTICLE 8. INSPECTIONS. The Work shall be inspected for acceptance in accordance with the General Conditions.

ARTICLE 9. DISPUTES. Any dispute, PRE or Claim between the parties shall be subject to the provisions of Article 7 of the General Conditions. DFCM reserves all rights to pursue its rights and remedies as provided in the General Conditions.

ARTICLE 10. TERMINATION, SUSPENSION OR ABANDONMENT. This Contractor's Agreement may be terminated, suspended or abandoned in accordance with the General Conditions.

ARTICLE 11. DFCM'S RIGHT TO WITHHOLD CERTAIN AMOUNT AND MAKE USE THEREOF. The DFCM may withhold from payment to the Contractor such amount as, in DFCM's judgment, may be necessary to pay just claims against the Contractor or Subcontractor at any tier for labor and services rendered and materials furnished in and about the Work. The DFCM may apply such withheld amounts for the payment of such claims in DFCM's discretion. In so doing, the DFCM shall be deemed the agent of Contractor and payment so made by the DFCM shall be considered as payment made under this Contractor's Agreement by the DFCM to the Contractor. DFCM shall not be liable to the Contractor for any such payment made in good faith. Such withholdings and payments may be made without prior approval of the Contractor and may be also be prior to any determination as a result of any dispute, PRE, Claim or litigation.

ARTICLE 12. INDEMNIFICATION. The Contractor shall comply with the indemnification provisions of the General Conditions.

ARTICLE 13. SUCCESSORS AND ASSIGNMENT OF CONTRACT. The DFCM and Contractor, respectively bind themselves, their partners, successors, assigns and legal representatives to the other party to this Agreement, and to partners, successors, assigns and legal representatives of such other party with respect to all covenants, provisions, rights and responsibilities of this Contractor's Agreement. The Contractor shall not assign this Contractor's Agreement without the prior written consent of the DFCM, nor shall the Contractor assign any moneys due or to become due as well as any rights under this Contractor's Agreement, without prior written consent of the DFCM.

ARTICLE 14. RELATIONSHIP OF THE PARTIES. The Contractor accepts the relationship of trust and confidence established by this Contractor's Agreement and covenants with the DFCM to cooperate with the DFCM and A/E and use the Contractor's best skill, efforts and judgment in furthering the interest of the DFCM; to furnish efficient business administration and supervision; to make best efforts to furnish at all times an adequate supply of workers and materials; and to perform the Work in the best and most expeditious and economic manner consistent with the interests of the DFCM.

ARTICLE 15. AUTHORITY TO EXECUTE AND PERFORM AGREEMENT. Contractor and DFCM each represent that the execution of this Contractor's Agreement and the performance thereunder is within their respective duly authorized powers.

ARTICLE 16. ATTORNEY FEES AND COSTS. Except as otherwise provided in the dispute resolution provisions of the General Conditions, the prevailing party shall be entitled to reasonable attorney fees and costs incurred in any action in the District Court and/or appellate body to enforce this Contractor's Agreement or recover damages or any other action as a result of a breach thereof.

CONTRACTOR'S AGREEMENT
PAGE NO. 5

IN WITNESS WHEREOF, the parties hereto have executed this Contractor's Agreement on the day and year stated hereinabove.

CONTRACTOR: _____

Signature Date

Title: _____

State of _____)
County of _____)

Please type/print name clearly

On this ____ day of _____, 20____, personally appeared before me, _____, whose identity is personally known to me (or proved to me on the basis of satisfactory evidence) and who by me duly sworn (or affirmed), did say that he (she) is the _____ (title or office) of the firm and that said document was signed by him (her) in behalf of said firm.

(SEAL)

Notary Public

My Commission Expires _____

APPROVED AS TO AVAILABILITY
OF FUNDS:

David D. Williams, Jr. Date
DFCM Administrative Services Director

**DIVISION OF FACILITIES
CONSTRUCTION AND MANAGEMENT**

- Manager Date
Capital Development/Improvements

APPROVED AS TO FORM:
ATTORNEY GENERAL
November 30, 2006
By: Alan S. Bachman
Asst Attorney General

APPROVED FOR EXPENDITURE:

Division of Finance Date

PERFORMANCE BOND
(Title 63, Chapter 56, U. C. A. 1953, as Amended)

That _____ hereinafter referred to as the "Principal" and _____, a corporation organized and existing under the laws of the State of _____, with its principal office in the City of _____ and authorized to transact business in this State and U. S. Department of the Treasury Listed (Circular 570, Companies Holding Certificates of Authority as Acceptable Securities on Federal Bonds and as Acceptable Reinsuring Companies); hereinafter referred to as the "Surety," are held and firmly bound unto the State of Utah, hereinafter referred to as the "Obligee," in the amount of _____ DOLLARS (\$ _____) for the payment whereof, the said Principal and Surety bind themselves and their heirs, administrators, executors, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal has entered into a certain written Contract with the Obligee, dated the _____ day of _____, 20____, to construct _____ in the County of _____, State of Utah, Project No. _____, for the approximate sum of _____ Dollars (\$ _____), which Contract is hereby incorporated by reference herein.

NOW, THEREFORE, the condition of this obligation is such that if the said Principal shall faithfully perform the Contract in accordance with the Contract Documents including, but not limited to, the Plans, Specifications and conditions thereof, the one year performance warranty, and the terms of the Contract as said Contract may be subject to Modifications or changes, then this obligation shall be void; otherwise it shall remain in full force and effect.

No right of action shall accrue on this bond to or for the use of any person or corporation other than the state named herein or the heirs, executors, administrators or successors of the Owner.

The parties agree that the dispute provisions provided in the Contract Documents apply and shall constitute the sole dispute procedures of the parties.

PROVIDED, HOWEVER, that this Bond is executed pursuant to the Provisions of Title 63, Chapter 56, Utah Code Annotated, 1953, as amended, and all liabilities on this Bond shall be determined in accordance with said provisions to the same extent as if it were copied at length herein.

IN WITNESS WHEREOF, the said Principal and Surety have signed and sealed this instrument this _____ day of _____, 20____.

WITNESS OR ATTESTATION:

PRINCIPAL:

By: _____
(Seal)

Title: _____

WITNESS OR ATTESTATION:

SURETY:

By: _____
Attorney-in-Fact (Seal)

STATE OF _____)
) ss.
COUNTY OF _____)

On this _____ day of _____, 20____, personally appeared before me _____, whose identity is personally known to me or proved to me on the basis of satisfactory evidence, and who, being by me duly sworn, did say that he/she is the Attorney in-fact of the above-named Surety Company and that he/she is duly authorized to execute the same and has complied in all respects with the laws of Utah in reference to becoming sole surety upon bonds, undertakings and obligations, and that he/she acknowledged to me that as Attorney-in-fact executed the same.

Subscribed and sworn to before me this _____ day of _____, 20____.

My commission expires: _____

Resides at: _____

NOTARY PUBLIC

Agency: _____
Agent: _____
Address: _____
Phone: _____

Approved As To Form: May 25, 2005
By Alan S. Bachman, Asst Attorney General

PAYMENT BOND

(Title 63, Chapter 56, U. C. A. 1953, as Amended)

KNOW ALL PERSONS BY THESE PRESENTS:

That _____ hereinafter referred to as the "Principal," and _____, a corporation organized and existing under the laws of the State of _____ authorized to do business in this State and U. S. Department of the Treasury Listed (Circular 570, Companies Holding Certificates of Authority as Acceptable Securities on Federal Bonds and as Acceptable Reinsuring Companies); with its principal office in the City of _____, hereinafter referred to as the "Surety," are held and firmly bound unto the State of Utah hereinafter referred to as the "Obligee," in the amount of _____ Dollars (\$ _____) for the payment whereof, the said Principal and Surety bind themselves and their heirs, administrators, executors, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal has entered into a certain written Contract with the Obligee, dated the _____ day of _____, 20____, to construct _____ in the County of _____, State of Utah, Project No. _____ for the approximate sum of _____ Dollars (\$ _____), which contract is hereby incorporated by reference herein.

NOW, THEREFORE, the condition of this obligation is such that if the said Principal shall pay all claimants supplying labor or materials to Principal or Principal's Subcontractors in compliance with the provisions of Title 63, Chapter 56, of Utah Code Annotated, 1953, as amended, and in the prosecution of the Work provided for in said Contract, then, this obligation shall be void; otherwise it shall remain in full force and effect.

That said Surety to this Bond, for value received, hereby stipulates and agrees that no changes, extensions of time, alterations or additions to the terms of the Contract or to the Work to be performed thereunder, or the specifications or drawings accompanying same shall in any way affect its obligation on this Bond, and does hereby waive notice of any such changes, extensions of time, alterations or additions to the terms of the Contract or to the Work or to the specifications or drawings and agrees that they shall become part of the Contract Documents.

PROVIDED, HOWEVER, that this Bond is executed pursuant to the provisions of Title 63, Chapter 56, Utah Code Annotated, 1953, as amended, and all liabilities on this Bond shall be determined in accordance with said provisions to the same extent as if it were copied at length herein.

IN WITNESS WHEREOF, the said Principal and Surety have signed and sealed this instrument this _____ day of _____, 20____.

WITNESS OR ATTESTATION:

PRINCIPAL:

By: _____

(Seal)

Title: _____

WITNESS OR ATTESTATION:

SURETY:

By: _____

Attorney-in-Fact (Seal)

STATE OF _____)

) ss.

COUNTY OF _____)

On this _____ day of _____, 20____, personally appeared before me _____

_____, whose identity is personally known to me or proved to me on the basis of satisfactory evidence, and who, being by me duly sworn, did say that he/she is the Attorney-in-fact of the above-named Surety Company, and that he/she is duly authorized to execute the same and has complied in all respects with the laws of Utah in reference to becoming sole surety upon bonds, undertakings and obligations, and that he/she acknowledged to me that as Attorney-in-fact executed the same.

Subscribed and sworn to before me this _____ day of _____, 20____.

My commission expires: _____

Resides at: _____

NOTARY PUBLIC

Agency: _____
Agent: _____
Address: _____
Phone: _____

Approved As To Form: May 25, 2005
By Alan S. Bachman, Asst Attorney General



Division of Facilities Construction and Management

CHANGE ORDER # _____

CONTRACTOR: _____

AGENCY OR INSTITUTION: _____

PROJECT NAME: _____

PROJECT NUMBER: _____

CONTRACT NUMBER: _____

ARCHITECT: _____

DATE: _____

CONSTRUCTION CHANGE DIRECTIVE NO.	PROPOSAL REQUEST NO.	AMOUNT		DAYS	
		INCREASE	DECREASE	INCREASE	DECREASE

	Amount	Days	Date
ORIGINAL CONTRACT			
TOTAL PREVIOUS CHANGE ORDERS			
TOTAL THIS CHANGE ORDER			
ADJUSTED CONTRACT			

DFCM and Contractor agree that the terms, contract sum, scope of the Work and time specified in this Change Order shall constitute the full accord and satisfaction, and complete adjustment to the Contract and includes all direct and indirect costs and effects related to, incidental to, and/or reasonably implied from such change in the contract terms, sum, scope of the Work and time.

Contractor: _____

Date

Architect/Engineer: _____

Date

Agency or Institution: _____

Date

DFCM: _____

Date

Funding Verification: _____

Date

Page ____ of ____ page(s)

30

CERTIFICATE OF SUBSTANTIAL COMPLETION

PROJECT _____ PROJECT NO: _____
AGENCY/INSTITUTION _____

AREA ACCEPTED

The Work performed under the subject Contract has been reviewed on this date and found to be Substantially Completed as defined in the General Conditions; including that the construction is sufficiently completed in accordance with the Contract Documents, as modified by any change orders agreed to by the parties, so that the State of Utah can occupy the Project or specified area of the Project for the use for which it is intended.

The DFCM - (Owner) accepts the Project or specified area of the Project as Substantially Complete and will assume full possession of the Project or specified area of the Project at _____ (time) on _____ (date).

The DFCM accepts the Project for occupancy and agrees to assume full responsibility for maintenance and operation, including utilities and insurance, of the Project subject to the itemized responsibilities and/or exceptions noted below:

The Owner acknowledges receipt of the following closeout and transition materials:

- | | | | |
|--|--|---|--|
| <input type="checkbox"/> As-built Drawings | <input type="checkbox"/> O & M Manuals | <input type="checkbox"/> Warranty Documents | <input type="checkbox"/> Completion of Training Requirements |
|--|--|---|--|

A list of items to be completed or corrected (Punch List) is attached hereto. The failure to include an item on it does not alter the responsibility of the Contractor to complete all the Work in accordance with the Contract Documents, including authorized changes thereof. The amount of _____ (Twice the value of the punch list work) shall be retained to assure the completion of the punch list work.

The Contractor shall complete or correct the Work on the list of (Punch List) items appended hereto within _____ calendar days from the above date of issuance of this Certificate. The amount withheld pending completion of the list of items noted and agreed to shall be: \$ _____. If the list of items is not completed within the time allotted the Owner has the right to be compensated for the delays and/or complete the work with the help of independent contractor at the expense of the retained project funds. If the retained project funds are insufficient to cover the delay/completion damages, the Owner shall be promptly reimbursed for the balance of the funds needed to compensate the Owner.

 CONTRACTOR (include name of firm)

by: _____
 (Signature) _____ DATE _____

by: _____
A/E (include name of firm) (Signature) DATE



USING INSTITUTION OR AGENCY

by: _____
(Signature) _____ DATE _____

by: _____
DFCM (Owner) (Signature) DATE

4110 State Office Building, Salt Lake City, Utah 84114 cc:
telephone 801-538-3018 • facsimile 801-538-3267 • <http://dfcm.utah.gov>

Parties Noted
DFCM, Director

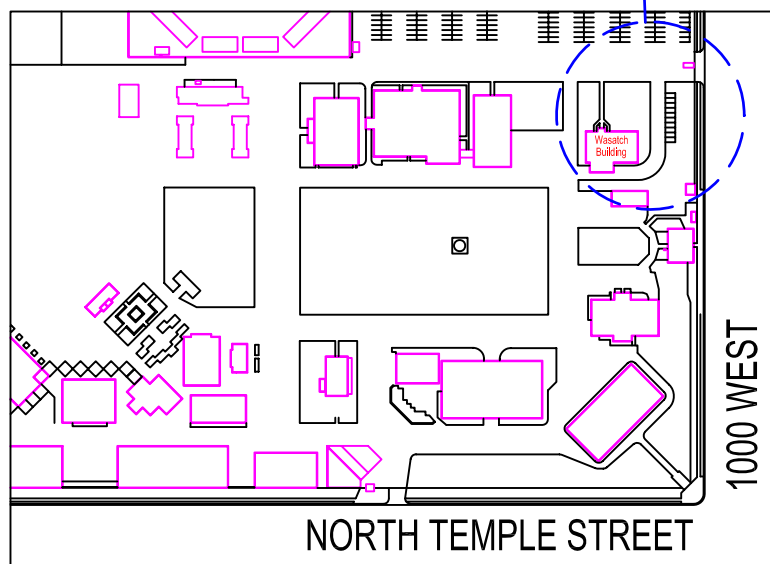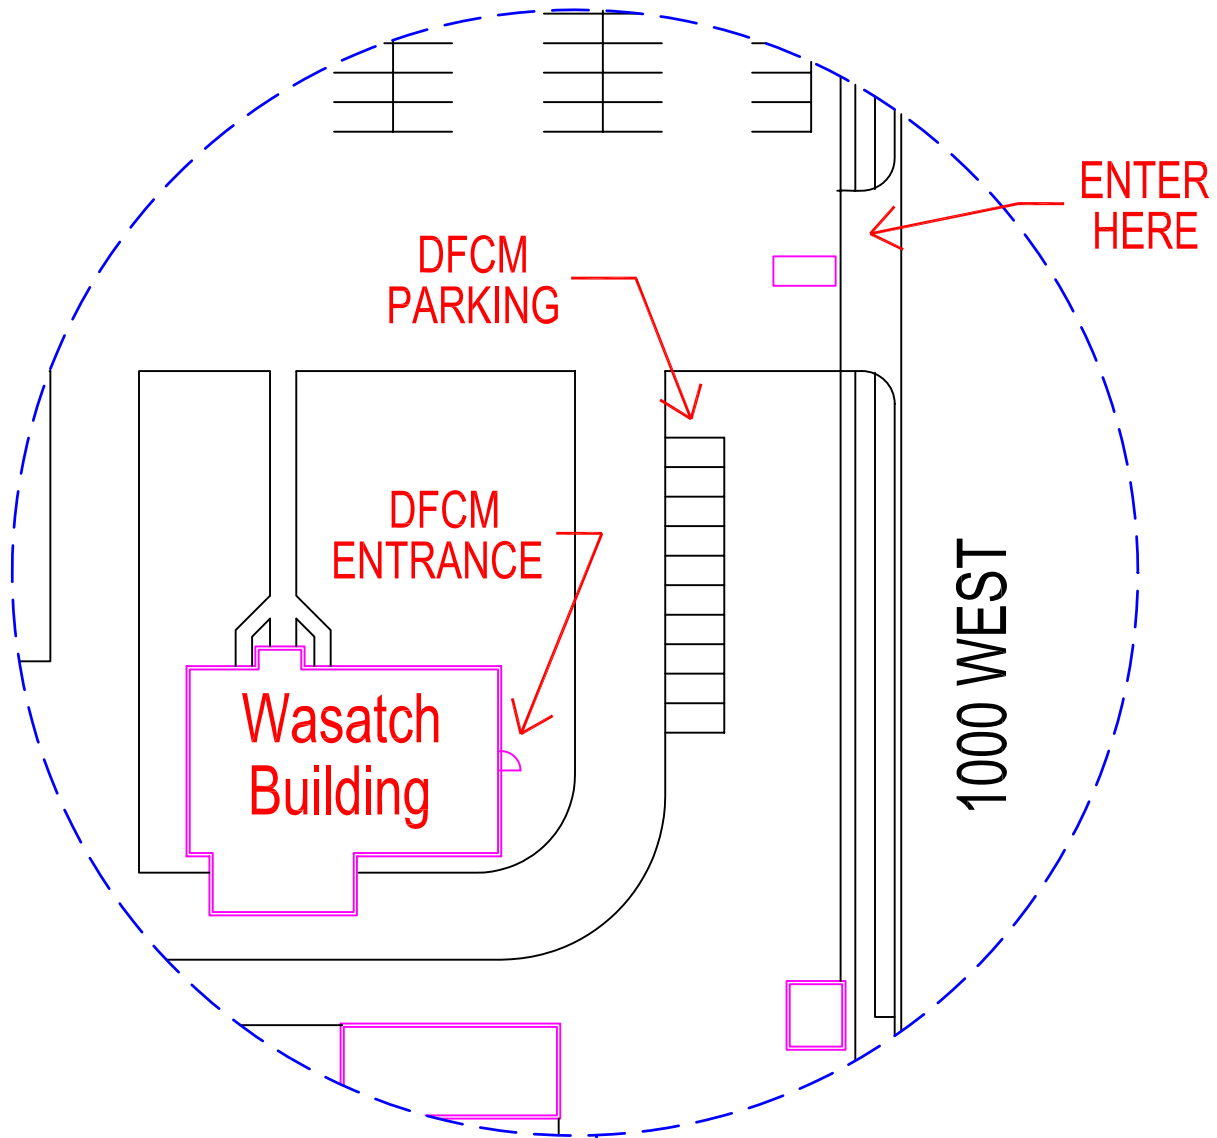

UTAH STATE
FAIR PARK



DFCM Temporary Location

CONSTRUCTION SPECIFICATION

SPECIAL CONDITIONS

1. SCOPE

This section of the specifications cover specific requirements, instructions and conditions applicable to this project only, which are not covered by the General Conditions or detailed specifications. Should there be conflicting statements between this section and other sections of these specifications, this section shall govern.

2. STANDARD PRODUCTS

The material brand names and catalog numbers shown on the drawings or called out in the specifications are meant to set a standard that all other materials should meet. The Contractor or supplier is encouraged to submit information and data to show his material is equal. The decision of the Engineer shall be final in this section.

3. CONTRACTOR TO MAINTAIN AND REPLACE STAKES

The Contractor shall furnish without charge, competent men from his force, stakes, tools and other materials, for the proper staking out of the work, in making measurements and surveys, and in establishing temporary or permanent reference marks in connection with the work. This does not mean to imply, the Contractor is to pay for initial staking, as this will be the cost of the Owner.

Initial staking to be provided by the Owner will be the establishment of:

- a. Bench Marks.
- b. Original lines and grades necessary for horizontal and vertical control of the construction of the permanent works.
- c. Right-of-way limits acquired through permits from Federal Agencies.

The Contractor shall provide surveys necessary to maintain the lines and grades during the construction of the permanent works.

4. LINES AND GRADES

All work done under this contract shall be done to the line, grades, and elevations shown on the plans, or as directed by the Engineer. The Contractor shall keep the Engineer informed, a reasonable time in advance, of the times and places at which he intends to do work, in order that lines and grades may be furnished and necessary measurements for record and payment may be made with the minimum of inconvenience to the Engineer and delay to the

Contractor.

5. **PAYMENT OF SUPPLIES AND SUBCONTRACTORS**

It is intended that the Contractor and subcontractor make full monthly payments to their suppliers and subcontractors as invoices are rendered. Such invoices shall be deemed as paid at the time each monthly certificate of payment is prepared by the Engineer. Affidavits will be submitted by the Contractor each as means of certifying to the Engineer that all equipment and materials delivered has been paid for. This will be the normal proof of payment; however, the Engineer will have the right at any time to demand copies of certified paid invoices. Failure or inability to provide such paid invoices will be sufficient cause for hold-up for further monthly pay estimates.

6. **GENERAL SAFETY REQUIREMENTS**

Excavations

- a. This section shall apply to all excavations in which workmen may be exposed to hazard of collapse of the banks, sides, or walls, during the time construction work is in process.
- b. All excavations shall be guarded by shoring, bracing or underpinning, or other methods as may be necessary to prevent injury to workmen resulting from the sides caving in.
- c. Excavated or other material must be deposited a safe distance from the edge of the excavation so as to prevent its falling or sliding back into the excavation.
- d. No trenches shall be left open at any time unless guarded with adequate barricades, warning lamps, and signs.
- e. Contractor's foremen and superintendents shall know where to obtain an oxygen resuscitator for use in an emergency. The phone number to call for immediate resuscitator and ambulance service shall be posted in all Contractors trench and at conspicuous places on the project at all times.

7. **CERTIFICATIONS**

Certifications that all materials used in the construction of the permanent works meet these specifications will be required. These certifications shall include the contract number, project name, bid item number, material furnished, applicable specification number and quantity furnished.

8. **TEST**

Test results that are required from the Contractor at the Contractor's expense will be performed as specified in the specifications. Duplicate copies of the test results shall be furnished to the Engineer for his approval at least 10 days prior to the use of the materials in the permanent works. All "on site" testing shall be made in the presence of and be approved by the Engineer or his representative. Written test results for "on site" tests will not be required.

9. **LIQUIDATED DAMAGES**

If the work, or any part thereof, is not completed within the time agreed upon in this contract or any extension thereof, the contractor shall be liable to the owner in the amount of \$500.00 per day for each and every calendar day the completion of the work is delayed beyond the time provided in this contract, as fixed and agreed liquidated damages and not as a penalty, and the Owner shall have the right to deduct from the retainage of the moneys which may be then due or which may be due and payable to the Contractor, the amount of the liquidated damages; and if the amount so retained by the owner is insufficient to pay in full such liquidated damages, the Contractor shall pay to the Owner the amount necessary to effect payment in full of such liquidated damages.

10. **EXISTING UTILITIES**

The Contractor will be responsible for crossing CMP's and utilities such as water lines, with the construction equipment. If the utility is damaged it shall be restored at the Contractor's expense.

11. **EXAMINATION OF PLANS, SPECIFICATIONS, SPECIAL PROVISIONS, AND SITES**

The bidder is required to examine carefully the site of the proposed work, the proposal, plans, specifications, supplemental specification, special provision, and contract forms before submitting a proposal.

The submission of a bid shall be considered PRIMA FACIE evidence that the Bidder has made the required examinations and is satisfied as to the conditions to be encountered in performing the work and as to the requirements of the contract.

12. **IMPROVEMENT RESTORATION**

All improvements damaged, whether private or public, as a result of Contractor's work shall be replaced by the Contractor. Improvement restoration shall be completed immediately upon completion of work in that area.

13. **WORK**

The Contractor shall not schedule work on Saturday, Sunday or holidays without written approval from the Engineer.

14. **AVAILABILITY OF MEN AND EQUIPMENT**

The Contractor shall have men and equipment available on weekends and holidays to cope with emergency conditions which may arise as a result of his operations. Phone numbers or addresses shall be provided in writing to the Owner.

15. **WASTE**

The Contractor will be required to dispose of all concrete and asphalt at an approved disposal area at no extra cost to the Owner.

16. **SUPERVISION BY CONTRACTOR**

The Contractor will supervise and direct work. He will be solely responsible for the means, techniques, sequences and procedures of construction. The Contractor will employ and maintain on the work site a qualified supervisor or superintendent who shall have been designated in writing by the Contractor as the contractors representative at the site. The supervisor or superintendent shall have full authority to act on behalf of the contractor and all communications given to the supervisor shall be as binding as if given to the contractor. The supervisor shall be present on the site at all times as required to perform adequate supervision and coordination of the work.

17. **GUARANTEE OF THE WORK**

The Contractor shall, for a period of one (1) year after completion and acceptance of the work, maintain and repair any defective work which may occur to the permanent work.

18. **RETAINAGE ON PROGRESS PAYMENTS**

Five percent (5%) will be retained on each progress payment to the Contractor until final completion and acceptance of all work.

19. **LIABILITY INSURANCE**

Before the contract is executed the Contractor with the successful bid shall be required to furnish to Owner, a copy of the public liability and property damage insurance policy, in the amount required by this contract, which is to be in force and applicable to the project. In

addition, the Contractor shall be required to furnish, at the same time a letter from agent for the company holding said policy, stating that he will inform Owner of any change in the status of the policy. Also, Workmen's Compensation Insurance shall be provided by the Contractor.

20. **WATER**

Contractor will be responsible for acquiring water for compaction and dust control.

21. **COMPENSATION**

Compensation for compliance to these Special Conditions will be made in the appropriate bid item.

CONSTRUCTION SPECIFICATION

8. MOBILIZATION

1. SCOPE

The work shall consist of mobilization of the Contractor's forces and equipment necessary for performing the work required under the contract.

It shall include the purchase of contract bonds, insurances, transportation of the personnel, equipment, and operating supplies to the site; establishing of office, buildings, construction signing in accordance with the manual on "Uniform Traffic Control Device", and other necessary facilities at the site; and other preparatory work at the site.

It shall not include mobilization for any specific time of work for which payment for mobilization is provided elsewhere in the contract.

This specification covers mobilization of work required by the contract at the time of award. If additional mobilization costs are incurred during performance of the contract as a result of change or added items of work for which the Contractor is entitled to an adjustment in contract price, compensation for such costs will be included in the price adjustment for the items of work changed or added.

2. PAYMENT

Payment will be made as the work proceeds, after presentation of invoices by the contractor shown his own mobilizations costs and evidence of the charges of suppliers, subcontractors, and others for mobilization work performed by them. If the total of such payments is less than the contract lump sum for mobilization, the unpaid balance will be included in the final contract payment. Total payment will be the lump sum contract price for mobilization, regardless of actual cost to the Contractor.

Payment will not be made under this item for the purchase costs of materials having a residual value, the purchase costs of materials to be incorporated into the project, or the purchase costs of operating supplies.

Payment of the lump sum contract price for mobilization will constitute full compensation for all labor, materials, equipment, and all other items necessary and incidental to completion of the work.

Compensation for any item of work described in the contract but not listed on the bid schedule will be included in the payment for the item or work to which it is made subsidiary. Such items and the items to which they are made subsidiary in Section 3 of this specification.

3. **ITEMS OF WORK AND CONSTRUCTION DETAILS**

Items of work to be performed in conformance with this specification and the construction details are:

a. **Item 1- Mobilization**

1. This item shall consist of the contract bonds, insurances, construction signing, and mobilization of the Contractor's forces and equipment, as defined in Section 1, required for performing the work under this contract.
2. Payment will be made in the lump sum contract price.

CONSTRUCTION SPECIFICATIONS

10. HOT MIX ASPHALT (HMA)

1. SCOPE

The work shall consist of the construction of a surface course composed of mineral aggregate and bituminous binder, placed and compacted within the lines and grades shown on the plans.

2. MATERIALS

- a. Asphaltic Cements: Viscosity grades of asphalt cement prepared from petroleum shall conform to the requirements of AASHTO Designation M-226.
- b. Asphaltic Emulsions: Anionic emulsified asphalt shall conform to the requirements of AASHTO Designation M-140.
- c. Mineral Aggregate: Mineral aggregate shall consist of crusher processed virgin aggregate material consisting of crushed stone, and gravel, conforming to the following requirements:
 1. Course aggregate retained on the No. 4 sieve shall consist of clean, hard, tough, durable, and sound fragments, with not more than 3 percent by weight of flat, elongated, soft or disintegrated particles, and shall be free from vegetable matter or other deleterious substances.
 2. That portion of the aggregate retained as the No. 4 sieve shall have not less than 50% of particles by weight with at least two mechanically fractured face, or clean angular face.
 3. The aggregate shall have a percentage of wear not exceeding 50% for road mix and 40% for plant mix, when tested in accordance with AASHTO Designation T-96. The Contractor shall certify that the mineral aggregate used on the job shall meet this wear test prior to its placement in the surface course.
 4. Fine aggregate passing the No. 4 sieve, may be either a natural or manufactured product. The aggregate shall be clean, hard-grained and moderately sharp, and shall contain not more than 2 percent by weight of vegetable matter or other deleterious substances.

5. That portion of the fine aggregate passing the No. 40 sieve shall be nonplastic when tested in accordance with AASHTO Designation T-90.
6. The weight of minus 200 mesh sieve material retained in the aggregate as determined by the difference in percent passing a No. 200 sieve by washing and dry sieving without washing shall not exceed 6 percent of the total sample weight.
7. The combined mineral aggregate plus any specified additives, when mixed with the specified bituminous binder in accordance with ASTM Designation D-1559, shall conform to the following requirements:

Marshall Stability.....1200-2500 lbs.
Flow (0.01 inch).....10-18
Voids content.....1.5% to 3.0%

The requirements specified in this subsection shall be used to

8. The combined dry mineral aggregate shall be uniformly graded and of such size that it meets one of the following gradation bands:

<u>1/2" Gradation</u>	<u>Ideal Gradation of Passing Band</u>	<u>% Passing Gradation Band</u>
1/2"	100	100
#4	70	60-80
#16	35	28-42
#50	17	11-23
#200	7	5-9

Any deviation from the above gradation Bands must be approved in writing by the Engineer.

9. Contractor will be required to supply the Engineer with a job mix formula based on the proceeding criteria. Job mix formula must be approved by the Engineer

3. CONSTRUCTION METHODS

- a. Hot Mix Plant: The mineral aggregate and bituminous binder shall be mixed at a central mixing plant. The shortest mixing time consistent with satisfactory coating of the aggregate shall be used, as determined by the Engineer. The mineral aggregate shall be considered satisfactorily coated with bitumen when all of the particles passing the No. 4 sieve and 98 percent of the particles retained on the No.4 sieve are coated.
- b. Spreading and Compaction: Place asphalt concrete pavement of 3-inches or more, in total compacted thickness, in two equal courses. The mixture shall be spread and struck-off in such a manner that finished surface shall conform to the elevations, grades, and cross-sections shown on the drawings or as staked in the field.

After the mixture has been spread, the surface shall be longitudinally rolled, beginning at the outside edge or lower side and proceeding toward the high side. Each pass of one roller shall overlap the proceeding pass by at least one-half the width of the roller. The surface shall be rolled by 4 passes with a pneumatic or steel-wheel exerting a minimum pressure of 40 psi., or by an approved equal method. Rolling operations shall be conducted in such a manner that shoving or distortion will not develop beneath the roller.

- c. Finishing: The surface shall be finished to a smooth, uniform line and grade with surface deviations not exceeding 3/8-inch in 10 feet. Determination of compliance with smoothness may be made with a straight edge, chalk-line, or profilograph at the option of the Engineer. Any irregularities shall be satisfactorily corrected at the expense of the Contractor.
- d. Temperature Control: The minimum temperature of the bituminous material at the time of application shall be 250 degrees Fahrenheit.
- e. Weather Limitations: Bituminous material shall not be placed when weather conditions are unfavorable or when the air temperature in the shade is less than 50 degrees Fahrenheit.
- f. Weight Devices: When the method of measurement is by weight, the Contractor shall provide weigh scales, at the job site. Scales will be certified by the Department of Agriculture.

The scales shall be accurate to within 1 percent of the correct weight throughout the range of use. Before using the scales and as frequently thereafter as the Engineer determines necessary to insure accuracy, the

Contractor shall have the scales checked, adjusted, and certified by a representative of the State agency. The Contractor shall maintain the scales to the required accuracy.

- g. Sampling of Aggregate: The Contractor shall submit test results and a certification of compliance that states that the gradation of the aggregate meets the contract requirements. The Contractor shall equip crushing, screening, and mixing plants with sampling devices. The Contractor shall take additional samples of material for testing as directed by the Engineer. These samples may be required at any time to validate the certification furnished by the Contractor.

Provisions shall be made for accurate proportioning. Each compartment shall have an outlet feed that can be shut off completely when any bin becomes empty. The bins or aggregate feeding system shall be constructed so samples can be readily obtained.

Positive weight measurement of the combined cold feed shall be maintained to allow regulation of the feed gate and permit automatic correction for variations in load.

The bitumen feed control shall be coupled with the total aggregate weight measurement device to automatically vary the bitumen feed rate and to maintain the required proportion. Means shall be provided for checking the quantity or rate of flow of bitumen into the mixing unit. Thermometers shall be fixed in the bitumen feed line at the charging valve of the mixer unit and at the discharge chute of the mixer unit. The Engineer may require replacement of any thermometer by an approved temperature-recording apparatus to allow better regulation of the material temperature.

A method shall be provided to automatically adjust the bituminous content in the mix for moisture variations in the cold feed.

- h. Hauling Equipment: Trucks used for hauling bituminous mixtures shall have tight, clean, smooth metal beds that have been thinly coated with a material to prevent the moisture from adhering to the beds. Truck beds shall be drained prior to loading. Each truck shall have a cover to protect the mixture from the weather. When necessary to insure that the mixture will be delivered at the specified temperature, truck beds shall be insulated and covers shall be securely fastened.
- i. Bituminous Pavers: Bituminous pavers shall be self-contained, power-propelled units, provided with an adjustable activated-screed or strike-off assembly, heated if necessary, and capable of spreading and finishing courses of bituminous plant mix material in lane widths and thicknesses shown on the drawings. When shown on the drawings, pavers shall be

equipped with a control system capable of automatically maintaining the proper screed elevation. The control system shall be automatically actuated from either a reference line or surface through a system of sensors that will maintain the paver screed at a predetermined transverse slope and at the proper elevation to obtain the required surface.

The transverse slope control system shall be capable of being made inoperative so that the screed can be controlled by mechanisms that will independently control the elevation of each end of the screed from reference line or surfaces.

The controls shall be capable of working in conjunction with any of the following attachments:

1. Ski-type device of not less than 40 feet in length.
 2. Taut stringline (wire) set to grade.
 3. Short ski or shoe.
- j. Compaction shall be performed with either vibratory steel-wheel or steel-wheel and pneumatic-tire rollers.

Rolling shall begin at the sides and proceed longitudinally parallel to the road centerline, each trip overlapping one-half the roller width, gradually progressing to the center. When paving in echelons or abutting a previously placed land, the longitudinal joint shall be rolled first, then followed by the above rolling procedure. On superelevated curves the rolling shall begin at the low side and progress to the high side.

Along forms, curbs, header walls, and other places not accessible to the rollers, the mixture shall be thoroughly compacted with hot hand tampers, smoothing irons, or mechanical tampers.

- k. Joints, trimming edges, and cleanup: Placing of the bituminous mixture shall be continuous. Rollers shall not pass over the unprotected end of a freshly laid mixture. Transverse joints shall be formed by cutting back into the previous run to expose the full depth of the course. Heat shall be applied to contact surfaces or transverse joints just before any additional mixture is placed against the previously rolled material.

4. FLUSH COAT

When required, the coat shall be placed on the completed surface course. The coat shall not be placed within 7 days after the surface course is laid. Prior to

placing the coat, the existing surface shall be cleaned of all dirt, sand, dust, or other objectionable material.

The material shall be sprayed over the prepared surface by means of a pressure distributor.

5. ACCEPTANCE SAMPLING AND TESTING

- a. Finished work samples. When required by the Engineer, the Contractor shall cut samples from the pavement. Samples size and locations will be designated by the Engineer. Samples shall be neatly cut with a saw or core drill. Voids left by sampling shall be backfilled and compacted to the density of the surrounding material.
- b. The Engineer will perform the testing of bituminous mixture (gradation and bituminous content). Acceptance samples of the mixture will be taken after it has been placed on the finished surface and just prior to compaction. Samples will be selected on a random basis and taken as frequently as the Engineer elects.
- c. Acceptance and testing bituminous mixture (compaction). After the bituminous mixture has been placed and compacted, the pavement shall meet the following density requirements.

Percent of Relative
Maximum Density
93 min.

Samples and test will be taken as frequently and at such locations as the Engineer elects. Compaction testing will be done by the Engineer.

- d. Acceptance sampling and testing of bituminous mixture (surface and thickness tolerance).
 1. Surface. Acceptance testing will be performed on the top surface. The surface will be tested by the Engineer with a straightedge. The variation of the surface from the testing edge of the straightedge shall not deviate at any point more than 1/8-inch.
 2. Thickness. The total compacted thickness of the mixture shall not vary more than 1/4-inch from the specified thickness. The compacted thickness shall not consistently be below nor consistently above the specified thickness.

The Engineer reserves the right to test areas which appear defective and require immediate correction.

6. Price Adjustments

1. Gradation and Asphalt Content B See Table A. The computation of the adjusted unit price will be based upon the minimum pay factor determined from Table A.
 1. The Engineer may order the removal of the mix if the acceptance tests deviate from the job-mix formula for a particular sieve or sieves, or if the asphalt content is more than the values shown under the 0.70 pay factor for asphalt concrete in Table A.
 2. The pay factor for material allowed to remain will be 0.50 for asphalt concrete.
 3. A lot equals the number of square feet placed during each production day.
 4. Density
 5. Areas with deficient density will be subject to the following price reductions:

TABLE A
AVERAGE DENSITY IN PERCENT

93 or more
92 to 93
Less than 92

PAY FACTOR
ASPHALT CONCRETE
1.00
0.90
0.50

TABLE A
ACCEPTANCE SCHEDULE FOR GRADATION
(Percentage Points)

SIEVE
SIZE PAY FACTOR
A.C. DEVIATIONS OF THE IDEAL GRADATION
ACCEPTANCE TESTS FROM THE JOB-MIX
(PERCENTAGE POINTS)

Asphalt
Content 1.000-0.38

0.950.39-0.43

0.90
0.44-0.47
0.800.48-0.52
0.700.53-0.56
½ inch & larger1.000-1
0.951.0-2.0
0.902.0-3.0
0.803.0-4.0
0.704.0-5.0
No. 41.000-10
0.9510-11.4
0.9011.5-11.9
0.8011.9-12.5
0.7012.5-13.0
No. 161.000-7.0
0.957.0-7.3
0.907.4-7.7
0.807.8-8.1
0.708.2-8.4
No. 501.000-6.0
0.956.0-6.5
0.906.6-6.8
0.806.9-7.1
0.707.2-7.5
No. 200 1.000-2.0
0.952.0-2.9
0.903.0-3.1
0.803.2-3.3
0.70
3.4-3.5

7. MEASUREMENT AND PAYMENT

- a. The bituminous material and mineral aggregate shall be measured by Lump Sum.
- b. The bituminous flush coat material will not be measured.
- c. Payment for the bituminous material, mineral aggregate will be made at the contract unit price. Such payment will constitute full compensation for furnishing, mixing, spreading, the bituminous material and mineral aggregate, compacting all other items necessary and incidental to the performance of the work.

8. ITEMS OF WORK AND CONSTRUCTION DETAILS

Items of work to be performed in conformance with this specification and construction details are:

- a. Item 2, Hot Mix Asphalt (PG58-22) (1/2-inch Max.)
 - 1. This item shall consist of furnishing the mineral aggregate, bituminous material, mixing the aggregate and bituminous material, spreading, and compacting the mixture as shown on the drawings.
 - 2. Contractor will supply the Engineer with the mix calibration factor, and a set of calibration samples 7 days prior to placement of asphalt.
 - 3. The aggregate shall meet the gradation requirements as listed in Section 2.C.8 of these specifications. The gradation of the aggregate shall be submitted in writing to the Engineer for his approval prior to the placing of the asphalt. The borrow area selected by the Contractor must meet the approval of the Engineer.
 - 4. The asphalt shall be grade PG58-22, viscosity graded.
 - 5. The aggregates and the bituminous material shall be measured or gaged and introduced into the mixer in the amount specified by the job mix formula.

After the required amounts of aggregate and bituminous material have been introduced into the mixer, the materials shall be mixed until a complete and uniform coating of particles and a thorough distribution of the bituminous material throughout the aggregate is obtained.

6. On areas where irregularities or unavoidable obstacles make the use of mechanical spreading and finishing equipment impractical, the mixture may be placed and finished by hand tools.
7. Hot mixture shall be placed at a temperature not less than 250 degrees Fahrenheit.
8. Material trimmed from the edges and any other discarded bituminous mixture shall be removed and disposed of by the Contractor in an approved area.
9. Contractor will be required to hand rake all seams.
10. Testing noted in Section 5.a will not be required.
11. Asphalt shall be placed at the finished depth noted on the plans. Tack coat will be required on all existing asphalt .
12. Contractor will not stockpile hot asphalt on existing asphalt roads prior to placement.
13. Bituminous surface course will not be placed during rain, when the roadbed is wet or during other adverse weather conditions. The owner will not be responsible for any bituminous surface course that is on the project site, but unable to spread due to adverse weather.
14. Contractor will be required to excavate all crackage adjacent to the main lay and replace with bituminous surface course material as shown on the drawings or directed by the Engineer.
15. Contractor will be required to deliver to the Engineer a weight invoice prior to placement of the asphalt surface course, invoices not received the day of placement will not be paid for.
16. Contractor will hand sweep and remove all sluffage on existing asphalt just prior to bituminous surface course placement to assure a clean surface and proper depth.
17. The existing water meter lid shown on plans shall be raised 2-inches. Work will not be measured. Payment will be subsidiary to this item.

18. Measurement and payment will be. in the contract lump sum contract price.

b. Item 3, Paving Fabric

1. This item shall consist of furnishing and placing a geotextile (paving fabric) beneath a pavement overlay to provide a waterresistant membrane and crack-retarding layer, as shown on the drawings.
2. Paving Fabric: The paving fabric will be a Petromat Style 4598 fiber, needle-punched, nonwoven material consisting of at least 85 percent by weight polyolefins, polyesters or polyamides. The paving fabric shall be resistant to chemical attack, rot and mildew and shall have no tears or defects that will adversely alter its physical properties. The fabric shall be specifically designed for pavement applications and be heat-set on one side to reduce bleed-through of tack coat and to minimize fabric pick-up by construction equipment during installation. The fabric shall meet the physical requirements specified in Table 1.
3. The tack coat used to impregnate the fabric and bond the fabric to the pavement shall be the same grade asphalt cement as used in the hot mix asphalt concrete. A cationic or anionic emulsion may be used as approved by the Engineer. The Contractor shall follow the recommendations of the paving fabric manufacturer when an asphalt emulsion is used. The use of cutbacks or emulsions that contain solvents shall not be permitted.
4. The paving fabric shall be kept dry and wrapped such that it is protected from the elements during shipping and storage. If stored outdoors, the fabric shall be elevated and protected with a waterproof cover. The paving fabric shall be labeled in accordance with ASTM D 4873-88, "Standard Guide for Identification, Storage, and Handling of Geotextiles."
5. The air and pavement temperatures shall be at least 50°F (10° C) and rising for placement of asphalt cement and shall be at least 60°F (16° C) and rising for placement of asphalt emulsion. Neither asphalt tack coat nor paving fabric shall be placed when weather conditions are not suitable, in the opinion of the Engineer.
6. The pavement surface shall be dry and be thoroughly cleaned of all dirt and oil to the satisfaction of the Engineer. Cracks 1/8"

wide or greater shall be cleaned and filled with suitable bituminous material or by a method approved by the Engineer. Crackfilling material shall be allowed to cure prior to placement of paving fabric. Potholes and other pavement distress shall be repaired. Repairs shall be performed as directed by the Engineer. The paving fabric must be placed on a drainable grade with no depressions which may hold water in the overlying asphalt concrete.

7. The tack coat shall be applied using a calibrated distributor truck spray bar. Hand spraying, squeegee and brush application may be used in locations where the distributor truck cannot reach. Every effort shall be made to keep hand spraying to a minimum.
8. The tack coat shall be applied uniformly to the prepared, clean, dry pavement surface. The tack coat application rate must be sufficient to saturate the fabric and to bond the fabric to the existing pavement surface. The tack coat application rate shall be 0.22 to 0.30 gallons per square yard as required by the roadway surface and environmental conditions. When using emulsions, the application rate must be increased as directed by the Engineer to offset the water content of the emulsion. Within street intersections, on steep grades or in other zones where vehicle speed changes are common, the normal application rate shall be reduced by about 20 percent as directed by the Engineer, but to not less than 0.20 gallons per square yard. The temperature of the tack coat shall be sufficiently high to permit a uniform spray pattern. For asphalt cements, the minimum temperature shall be 290°F. To avoid damage to the fabric, distributor tank temperatures shall not exceed 325°F. For asphalt emulsions, the distributor tank temperatures shall be maintained between 130°F and 160°F. The target width of the tack coat application shall be equal to the paving fabric width plus 6". Tack coat application shall be wide enough to cover the entire width of fabric overlaps. The tack coat shall be applied only as far in advance of paving fabric installation as is appropriate to ensure a tacky surface at the time of paving fabric placement. Traffic shall not be allowed on the tack coat. Excess tack coat shall be cleaned from the pavement.
9. The paving fabric shall be placed onto the tack coat using mechanical or manual laydown equipment capable of providing a smooth installation with a minimum amount of wrinkling or folding. The paving fabric shall be placed before the asphalt cement tack coat cools and loses its tackiness. Paving fabric

shall not be installed in areas where the overlay asphalt tapers to a minimum compacted thickness of less than 1.5". When asphalt emulsions are used, the emulsion shall be allowed to cure properly such that essentially no water moisture remains prior to placing the paving fabric. Fabric wrinkles severe enough to cause folds shall be slit and laid flat. Brooming and/or rubber-tire rolling will be required to maximize paving fabric contact with the pavement surface. Additional hand-placed tack coat may be required at overlaps and repairs as required by the Engineer. Turning of the paver and other vehicles shall be done gradually and kept to a minimum to avoid movement and damage to the paving fabric. Abrupt starts and stops shall also be avoided. Damaged fabric shall be removed and replaced with the same type of fabric and a tack coat.

10. At joints, fabric rolls shall overlap by 1" to 3". End joints and joints from repair of wrinkles should be made to overlap or "shingle" in the direction that the pavement overlay will be placed. Overlaps of adjacent rolls may be as great as 6" to accommodate variations between the width of the roadway and the paving fabric. Excess fabric shall be cut and removed to ensure that overlaps of adjacent rolls do not exceed 6". A uniform application of tack coat shall be applied between all fabric overlaps. Any locations that do not have tack between the overlaps shall be corrected by manual placement of tack coat prior to overlay construction. Unless otherwise approved by the Engineer, no traffic except necessary construction traffic will be allowed to drive on the paving fabric.

All areas with paving fabric placed will be paved the same day. No traffic except necessary construction traffic will be allowed to drive on the paving fabric.

11. Asphalt overlay construction shall closely follow fabric placement. All areas in which paving fabric has been placed will be paved during the same day. Excess tack coat that bleeds through the paving fabric shall be removed. Excess tack coat can be removed by broadcasting hot mix or sand on the paving fabric. Excess sand or hot mix should be removed before beginning the paving operation. In the event of rainfall on the paving fabric prior to the placement of the asphalt overlay, the paving fabric must be allowed to dry completely before asphalt is placed. Overlay asphalt thickness shall meet the requirements of the contract drawings and documents. The minimum compacted thickness of overlay asphalt shall not be less than 1.5" in areas of paving fabric installation.

12. The paving fabric will be measured by the Lump Sum. Tack coat will not be measured. Tack coat will be subsidiary to paving fabric.
13. Payment, the accepted quantities of paving fabric will be paid for at the contract lump sum price.

TABLE 1: PHYSICAL REQUIREMENTS OF PAVING FABRICS 1, 2, 3
Property Test Method Units Required Values

Properties	Test Method	American Standard	Metric Units
Mass per unit Area	ASTM D-3776	4.1 oz/yd ²	140 g/m ²
Tensile Strength	ASTM D-4632	101 lb	0.450 kN
Tensile Elongation	ASTM D-4632	50%	50%
Asphalt Retention	ASTM D-6140	0.20 gal/yd ²	0.90 l/m ²
Melting Point	ASTM D 276-87	300 °F	149 °C
Surface Texture	VISUAL INSPECTION	Heat-Set On One Side	

CONSTRUCTION SPECIFICATION

93. PAVEMENT MARKING PAINT

1. SCOPE

The work shall consist of furnishing and applying ready mixed traffic paint to asphaltic or concrete pavement.

2. MATERIALS

Furnish VOC Compliant Solvent Based or Acrylic Water Based Pavement marking paint meeting Federal Specification TTP-115 F for Low Volatile Organic Compounds (VOC) of 1.25 lbs/gal.

Apply to asphaltic or concrete pavement as edge lines, center lines, broken lines, guide lines, symbols and other related markings.

Remove pavement markings.

REFERENCES

1. AASHTO M247: Glass Beads Used in Traffic Paint.
2. ASTM D 562: Consistency of Paints Measuring Krebs Unit (KU) Viscosity Using the Stormer-Type Viscometer.
3. ASTM D 711: No-Pick-Up Time of Traffic Paint.
4. ASTM D 2205: Selection of Tests for Traffic Paints.
5. ASTM D 2743: Uniformity of Traffic Paint Vehicle Solids by Spectroscopy and Gas Chromatography.
6. ASTM D 3723: Pigment Content of Water-Emulsion Paints.
7. ASTM D 3960: Determining Volatile Organic Compound (VOC) Content of Paints and Related Coatings.
8. ASTM D 4451: Pigment Content of Paints

9. ASTM D 5381: S-Ray Fluorescence (XRF) Spectroscopy of Pigments and Extenders.
10. Federal Standards 595B, 37875, 33538, and 11105.

ACCEPTANCE

1. Repaint any line or symbol failing to meet bead adherence and dimensional requirements.
2. Repaint any line or symbol failing to meet the minimum application requirements for paint or beads. (Road Only)

PAINT

1. Choose an approved pavement marking paint. "Accepted Products Listing". Follow Federal Standards 595B, 37875, 33538, and 11105. Meet the following requirements for VOC Compliant Solvent Based Paint or Acrylic Water Based Paint:

CIELAB (L*a*b*) D65/10°		
White	Yellow	Red
L* 91.9 to 95.6	L* 70.0 to 72.7	L* 31.4 to 33.4
a* -1.8 to -2.1	a* 22.5 to 24.8	a* 51.6 to 52.6
b* 3.8 to 2.2	b* 89.7 to 73.9	b* 34.1 to 35.1

- a. No-track time: Not more than 5 minutes when tested according to ASTM D 711.
- b. Volatile Organic Compounds Content: Less than 1.25 lbs/gal ASTM D 3960.
- c. Free of lead, chromium, or other related heavy metals ASTM D 5381.
- d. Pigment: Percent by weight: Acrylic Water Based minimum of 62.0 ± 2.0 VOC Compliant Solvent minimum of 52.0. ASTM D 3723.
- e. Total Solids: Percent by weight: Acrylic Water Based minimum of 77.0 VOC Compliant Solvent minimum of 70.0 ASTM D 2205.
- f. Acrylic water based paint must contain a minimum of 40 percent, by weight, 100 percent acrylic cross-linkable emulsion as determined by infrared analysis and other chemical analysis available to UDOT. ASTM D 2205 and UDOT Manual of Instruction Section 996.

- g. VOC compliant solvent based paint must contain 37.5 percent, by weight, copolymer alkyd-resin ASTM D 2205.
- h. ASTM D 562, ASTM D 2743, ASTM D 4451 and ASTM D 5381: Tests used to verify paint samples meet “Accepted Products Listing.”

GLASS SPHERE (BEADS) USED IN PAVEMENT MARKING PAINT

- 1. Specific Properties:
 - a. Meet AASHTO M 247.
 - b. Meet type II, uniform gradation.

3. PREPARATION

- 1. Line Control.
 - a. Establish control points as required.
 - b. Maintain the line within 0 inches of the established control points and mark the roadway and parking stalls.
 - 1. Remove paint that is not placed within tolerance of the established control points and replace at no expense to the Owner.
- 2. Remove dirt, loose aggregate and other foreign material and follow manufacturer’s recommendations for surface preparation.

4. APPLICATION

- 1. Pavement Marking Paint: Apply at the following rates:
 - a. 4 inch Solid Line: 310 ft/gal
 - c. 8 inch Solid Line: 135 ft/gal
- 2. Replace pavement markings that are less than 14 wet mils in thickness.
- 3. No payment for pavement markings placed in excess of 18 wet mils in thickness.
- 4. Painted Legends and Symbols 1 gallon per 100 square feet.
- 5. Glass Sphere (Beads): Apply a minimum of 8 lbs/gal of paint, the full length and width of line and pavement markings.
- 6. Begin striping operations no later than 24 hours after ordered by the Engineer.
- 7. At time of application apply lines and pavement markings only when the air and pavement temperature are:
 - a. 40 degrees F and rising for VOC Compliant Solvent Based Paint.
 - b. 50 degrees F and rising for Acrylic Water Based Paint.

8. Comply with Traffic Control Drawing TC-16

5. **CONTRACTOR QUALITY CONTROL**

1. Application Rate: Verify that the paint and beads are being applied within specified tolerances prior to striping.

6. **ITEMS OF WORK AND CONSTRUCTION DETAILS**

Items of work to be performed in conformance with this specification and the construction details are:

a. **Item 4 - Pavement Marking Paint**

1. This item shall consist of pavement marking as required for performing the work under this contract. Also, the Contractor will be required to furnish and install the accessible parking signs (handicapped) under this item.
2. Line Control
 - a. Establish control points for parking stalls as shown on the drawings.
 - b. Maintain the line within 1 inch of the established control points and mark the parking lot as needed.
3. Paint handicap symbols as shown on the drawings.
4. Glass sphere (beads) will not be required.
5. Broom or Sweep the pavement surface and remove dirt, loose stones and other foreign material.
6. Equipment
 - a. Equipment manufactured specifically for applying paint.Use only workmen experienced in operating the equipment.
7. Restrictions
 - The Contractor shall begin striping operations no later than 24 hours after written order by the

Engineer.

- Apply traffic striping only when the air and pavement temperature are 40°F. or higher.

8. Application Rates

Paint - apply at the following rates:

	<u>Linear Feet/Gallon</u>
4" Solid Stripe	310
8" Solid Stripe	135

Beads

- A minimum of 6 pounds/gallon of paint (**Not Required**)
- Apply beads the full length of the line (**Not Required**)

9. Signs will be installed at the locations shown on the drawings.

7. **MEASUREMENT AND PAYMENT**

Measurement and payment will be made in the Lump Sum contract price. Such payment will constitute full compensation for all paint stripping, ADA painting, signs attached to building, and all other work necessary and incidental to completion of the work.

**STATE OF UTAH - DFCM
VERNAL ARMORY PAVEMENT REPAIRS**

DFCM PROJECT NO. 06093470

SUMMARY OF ITEMS

ITEM	SECTION	WORK OR MATERIAL	UNIT	QTY
1	8	MOBILIZATION	L.S.	1
2	10	HOT MIX ASPHALT (HMA) (PG58-22) (1/2-INCH MAX.)	SQ.FT.	25,000
3	10	PAVING FABRIC	SQ.FT.	2,900
4	93	TRAFFIC STRIPING PAINT	GAL	8