


SITE DEMOLITION GENERAL NOTES

- A. PROVIDE ALL MISCELLANEOUS FLASHING & ACCESSORIES REQUIRED FOR A COMPLETE JOB. FLASH ALL ROOF PENETRATIONS. REMOVE AND REINSTALL ALL MISCELLANEOUS EQUIPMENT.
- B. ALL MISC. VENTS, FLUES, CURBS ETC. TO MEET MIN. CODE CLEARANCE ABOVE NEW ROOF LINE.
- C. FIELD VERIFY EXACT SIZES AND DIMENSIONS.
- D. REMOVE ALL EXISTING B.U.R. VENTS.

SITE DEMOLITION KEYED NOTES

- 1 REMOVE EXISTING B.U.R. ON 2 LAYERS OF 1 1/2 PERLITE DOWN TO EXISTING CONC. DECK. FULLY ADHERE 2 LAYERS OF 1 1/2" POLYISOCYANURATE INSULATION & SINGLE-PLY, FELT-BACK PVC MEMBRANE TO CONC. DECK.
- 2 REMOVE EXISTING CONTROL JOINT.
- 3 FLASH EXISTING VTR, SEE 4/A-2.
- 4 MECHANICAL PENTHOUSE, REMOVE AND REINSTALL AS REQUIRED TO FLASH EXISTING CURB, SEE 5/A-2 SH.
- 5 EXISTING ROOF DRAIN TO BE CLEANED FROM ALL DEBRIS & PROVIDE SINGLE-PLY MEMBRANE DRAIN INSERT, SEE 1/A-2.
- 6 REMOVE AND REINSTALL EXISTING ROOF HATCH AS REQUIRED FOR NEW FLASHING, SEE 5/A-2. PROTECT EXISTING SKYLIGHT DOME.
- 7 REMOVE EXISTING DRIP EDGE & PROVIDE WELDABLE FLASHING DRIP EDGE WITH CONT. GLEAT FASTENED @ 8" O.C.

- 8 PROVIDE TAPERED INSULATED CRICKET TO GET A 1/8"/FT SLOPE.
- 9 EXISTING TERRA-COTTA CAP TO REMAIN. PROVIDE NEW STANDING SEAM MTL. CAP WITH CONTINUOUS GLEATS @ 8" O.C. REMOVE AND REINSTALL CONDUIT FOR LIGHTS.
- 10 CUT EXISTING CAP TO PROVIDE SCUPPER, FLASH W/ WELDABLE METAL.
- 11 EXISTING CONDUIT TO REMAIN. WRAP EXISTING BLOCKS W/ SINGLE-PLY MEMBRANE.
- 12 REMOVE EXISTING LIGHT STANDS. PROVIDE PIPE BRACE ATTACHED TO CONC. DECK FOR EXISTING LIGHT FIXTURE, SEE ---.
- 13 PROVIDE SLIP SHEETS UNDER EXISTING SATELLITE'S LEGS.

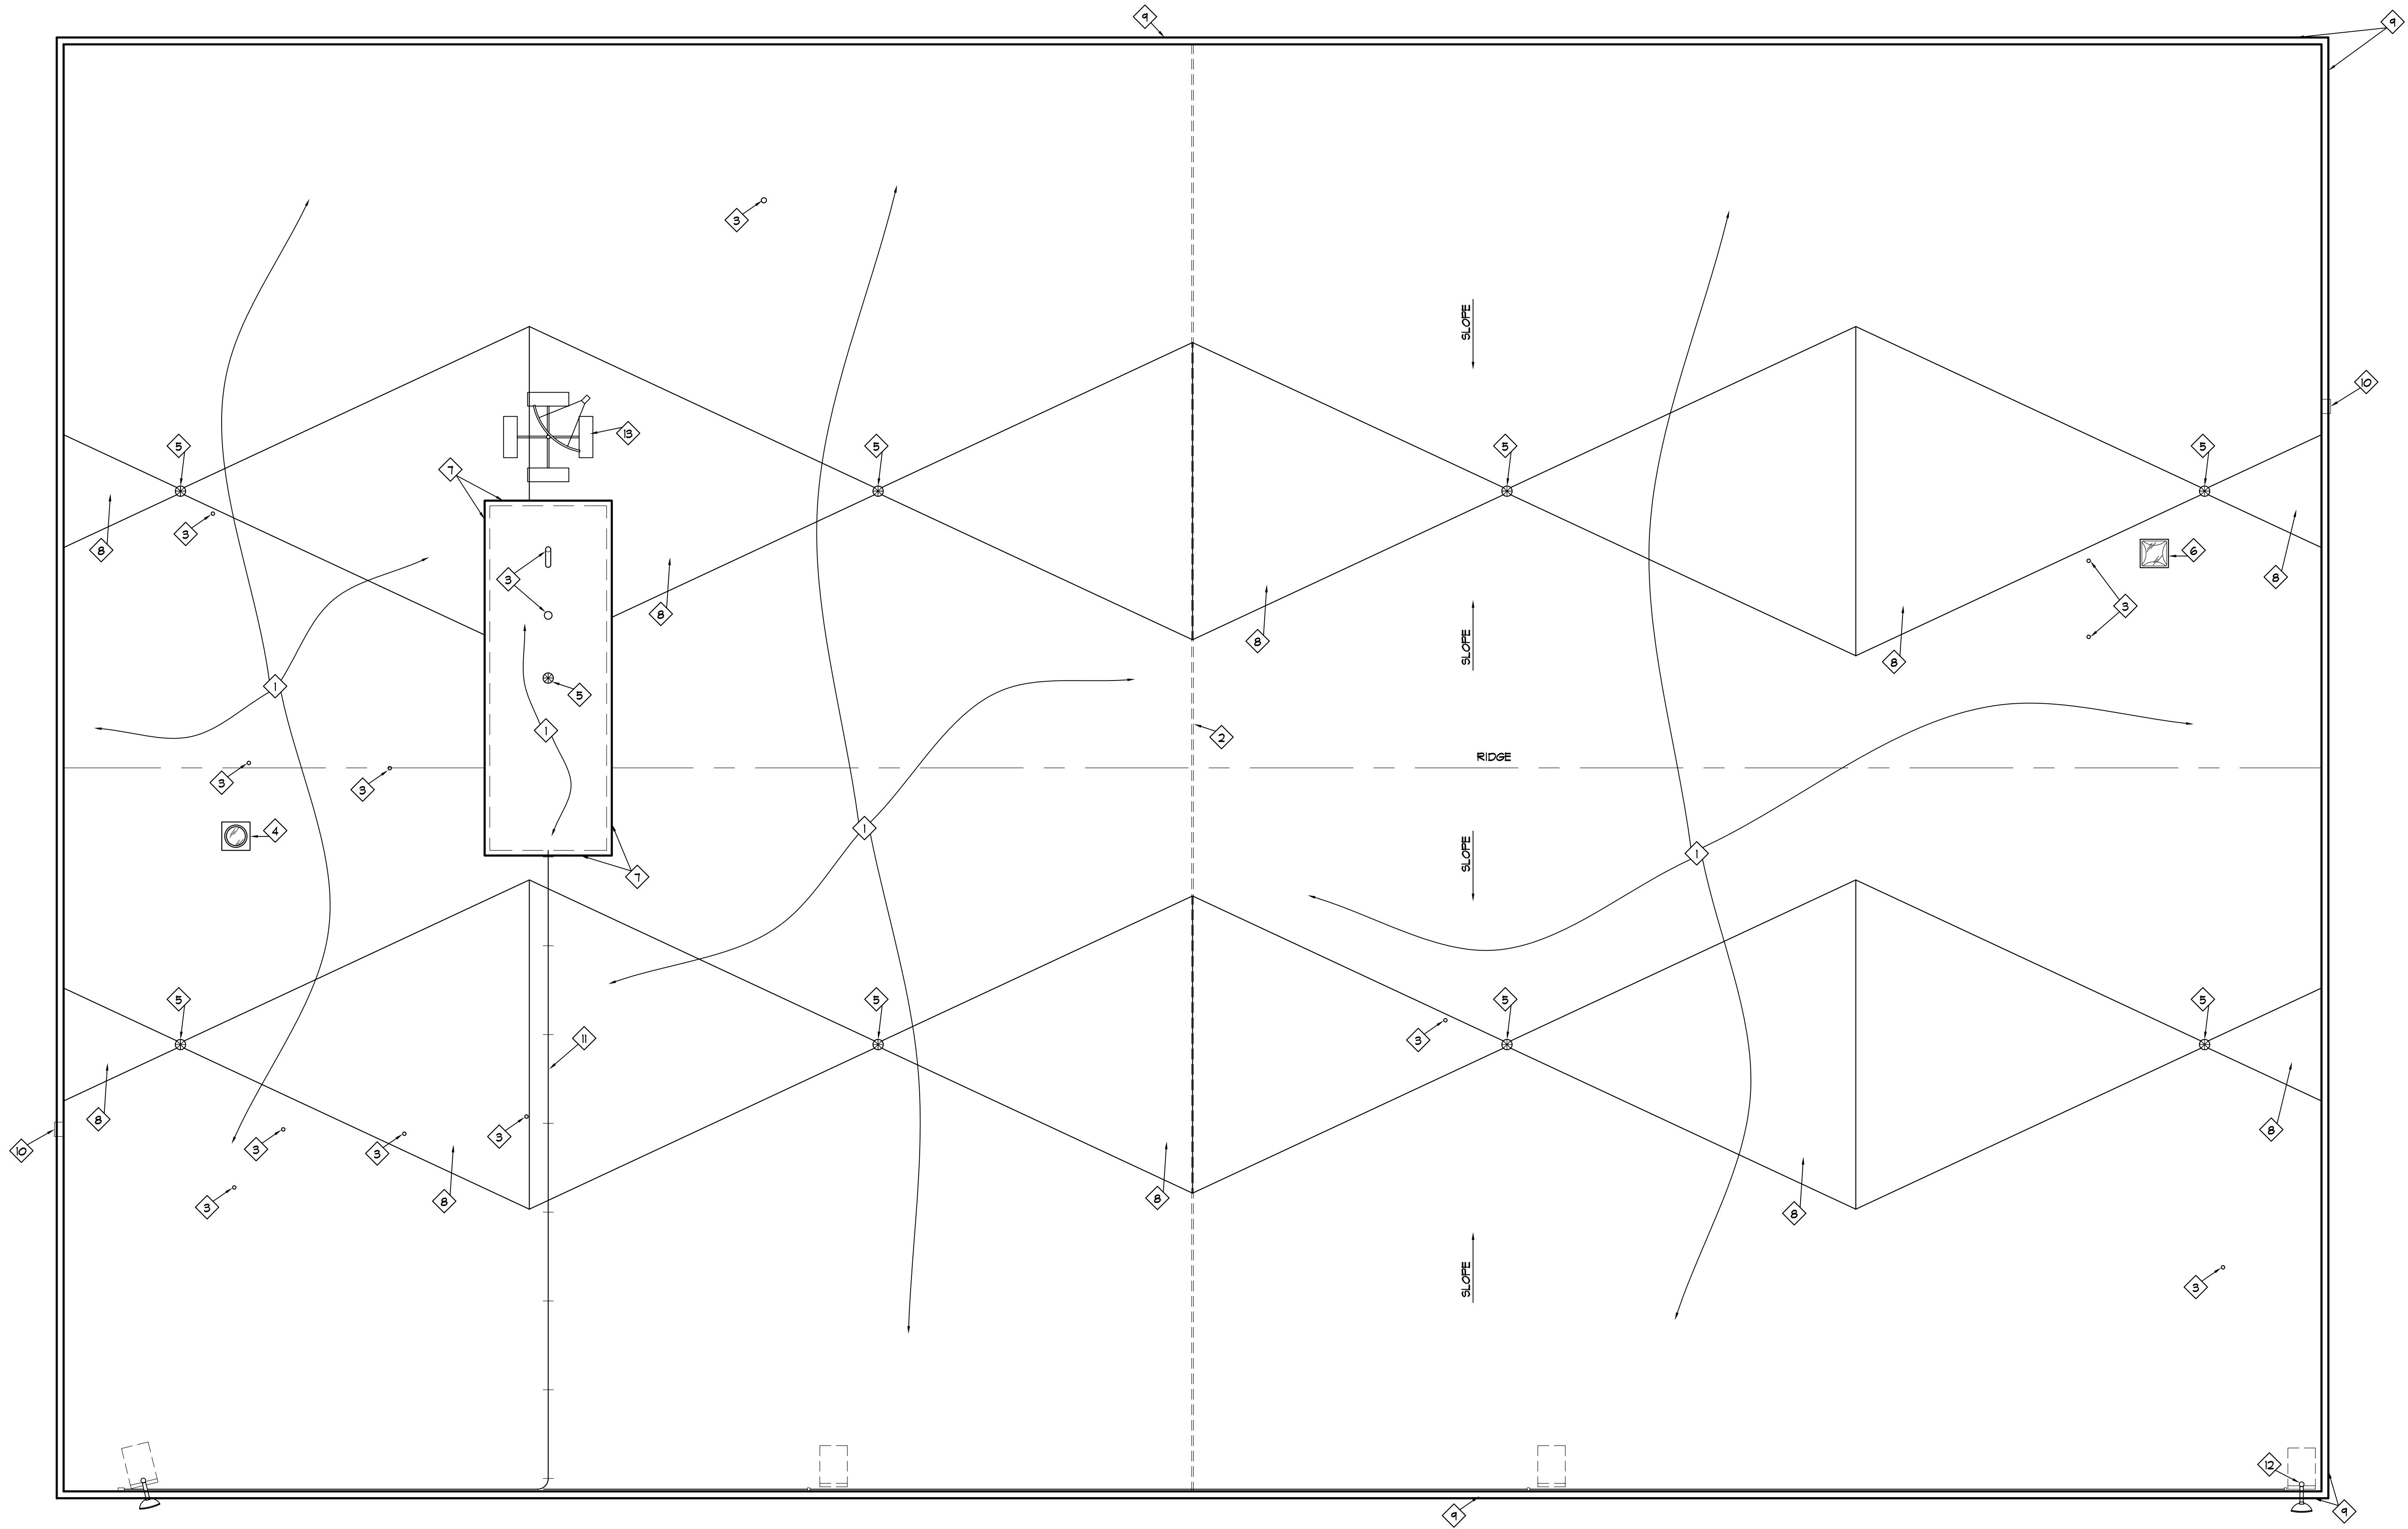

A ROOF PLAN
A-1 1/8" = 1'-0"



620 24th Street Ogden, Utah 84401

RICHARDS
BOY
architects
a professional corporation

Phone: (801) 394-3033 Fax: (801) 394-9064
E-mail: mail@rarchitects.net

REVISED:


PROJECT NUMBER
0706
DATE
MAY 30, 2007
DRAWN BY
M. MANZANARES

PROJECT:
WSU SOCIAL SCIENCE BLDG
REROOF


PROJECT ADDRESS:
3850 UNIVERSITY CIRCLE
OGDEN, UTAH 84408

SHEET TITLE:
ROOF PLAN

SHEET NO.
A-1

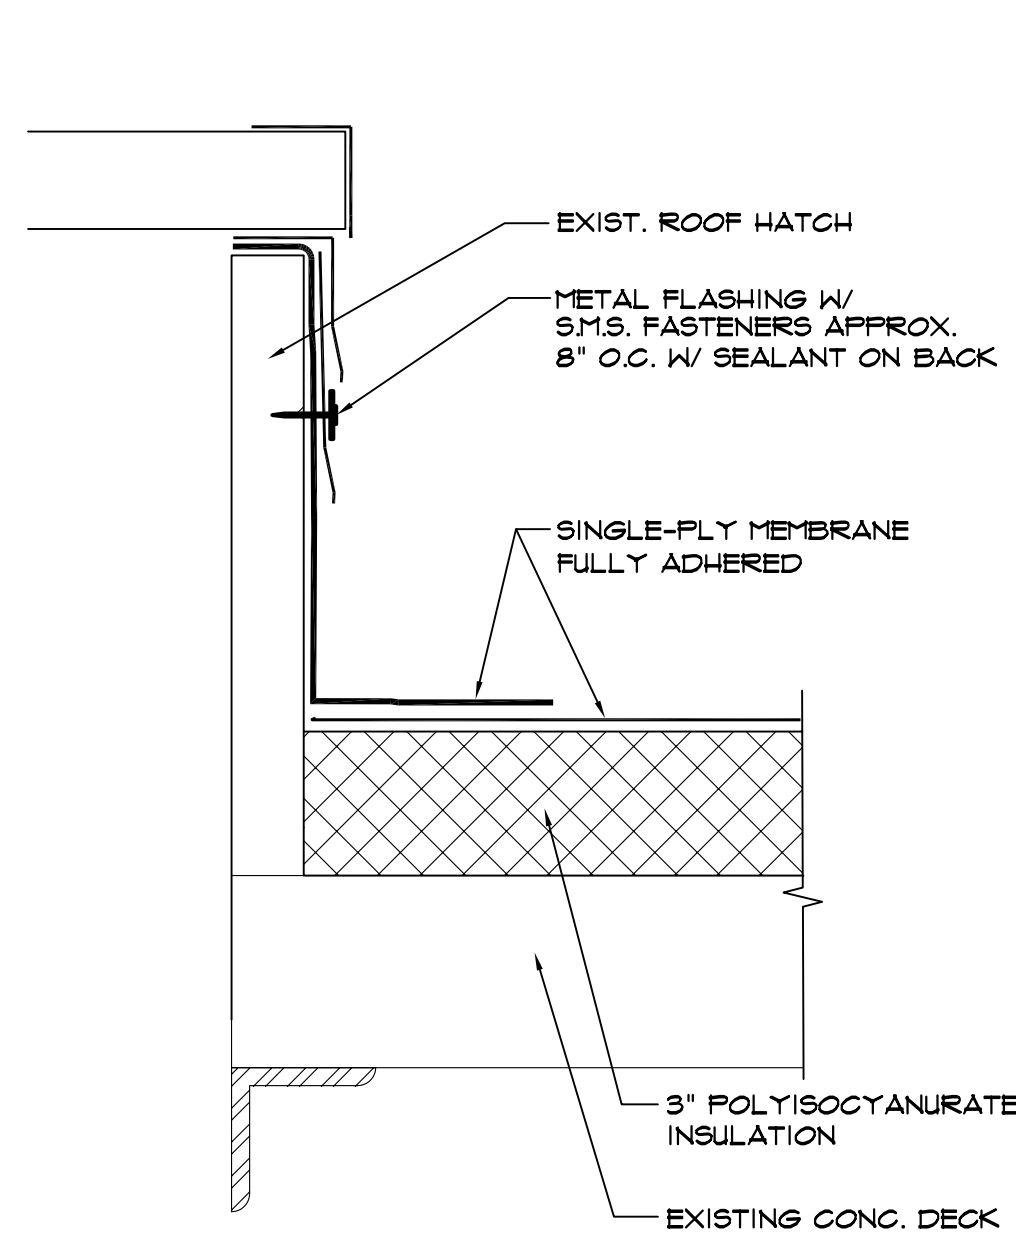


4 ROOF HATCH
3" = 1'-0"

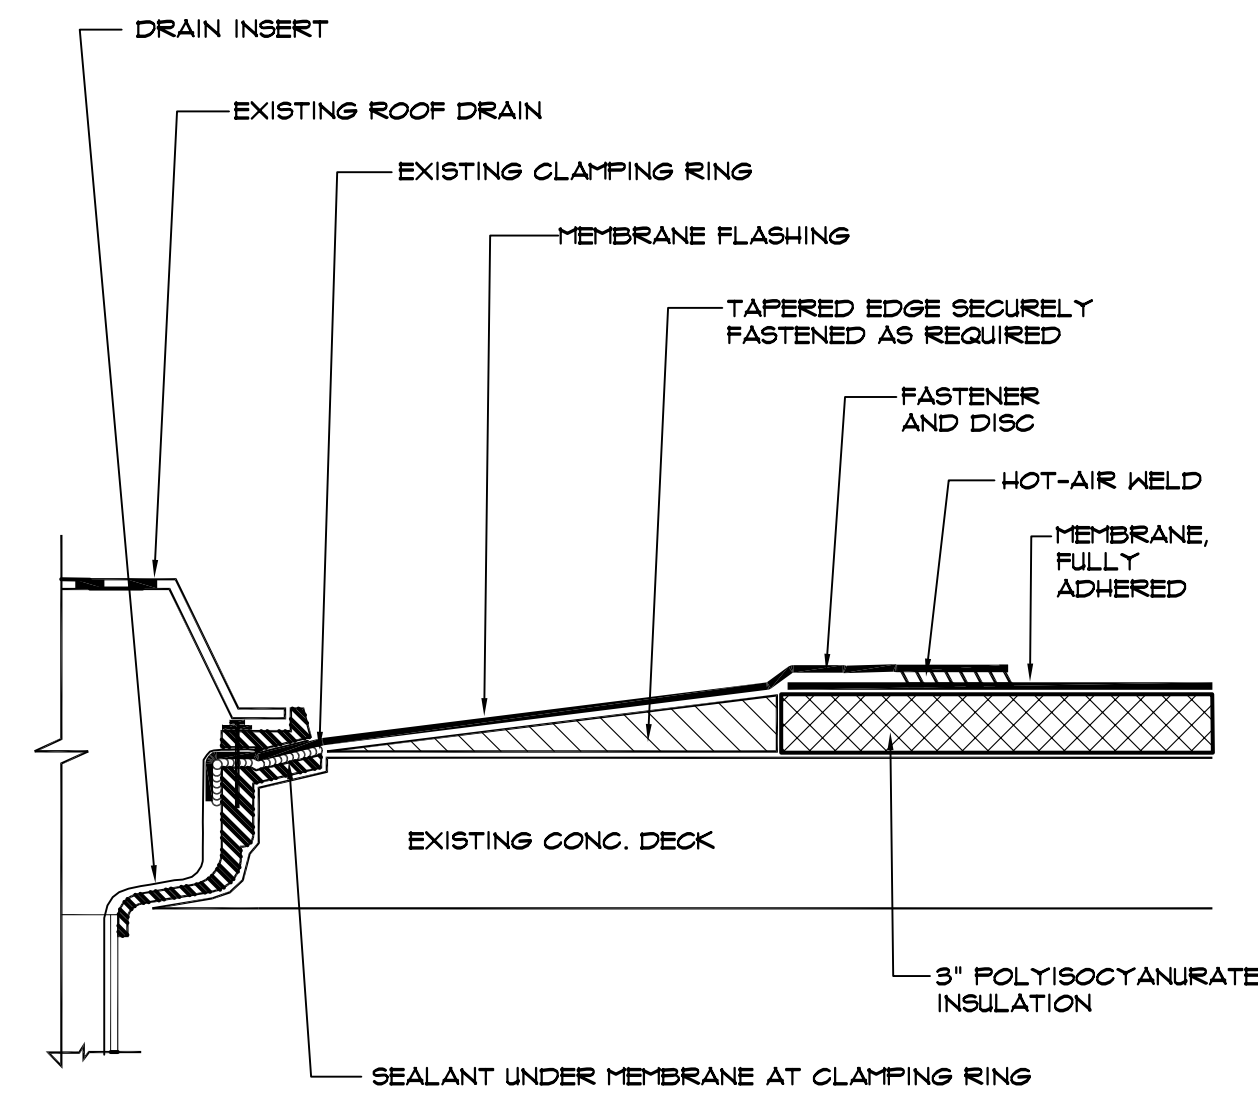


NOTES:
1) EXISTING DRAIN BOWL, CLAMPING RING AND DRAIN ACCESSORIES ARE TO BE CLEANED FREE OF ALL CONTAMINATES.


2 ROOF DRAIN DETAIL
NOT TO SCALE

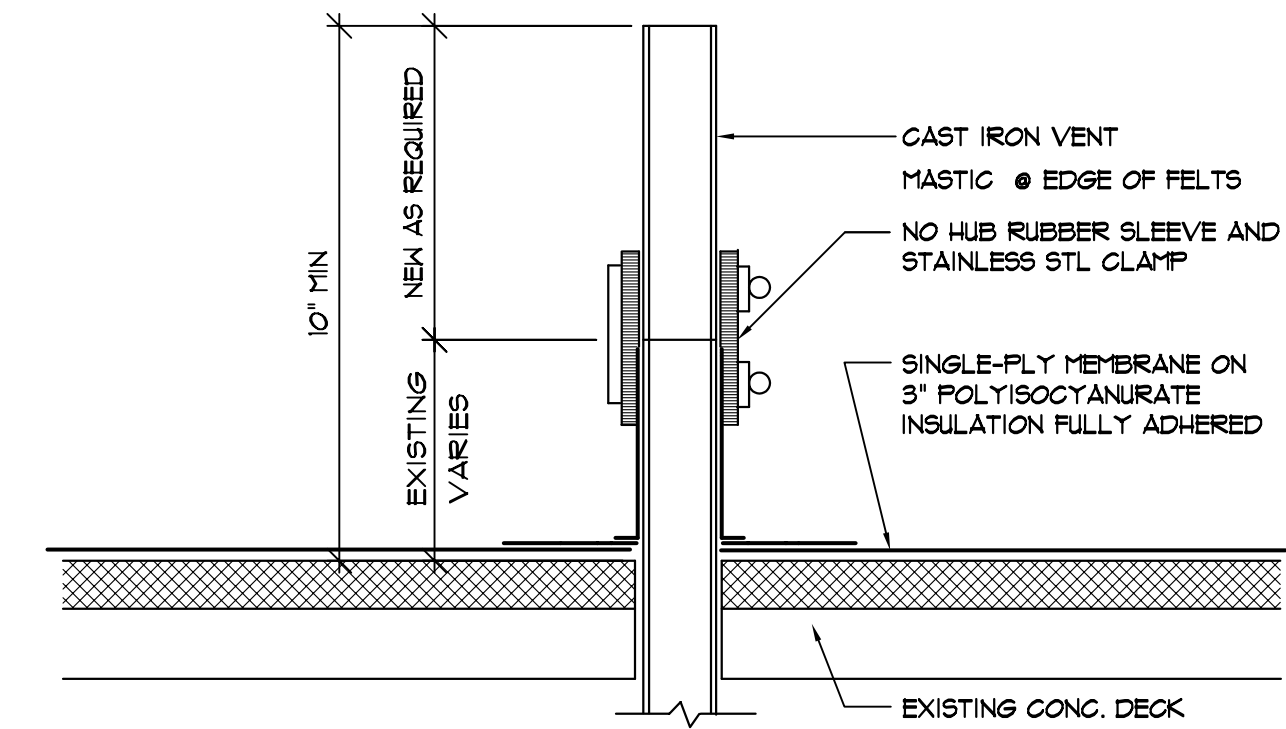


1 VENT EXTENSION DETAIL
NOT TO SCALE

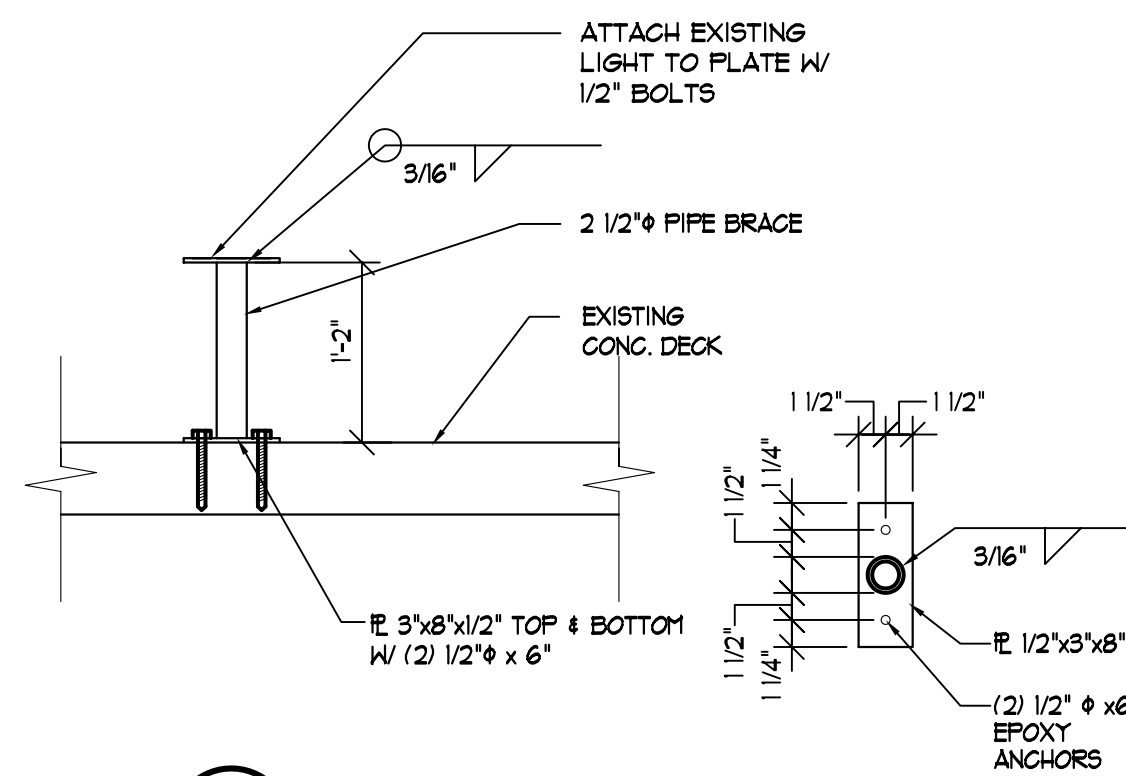

3 LIGHT BRACING
3/4" = 1'-0"

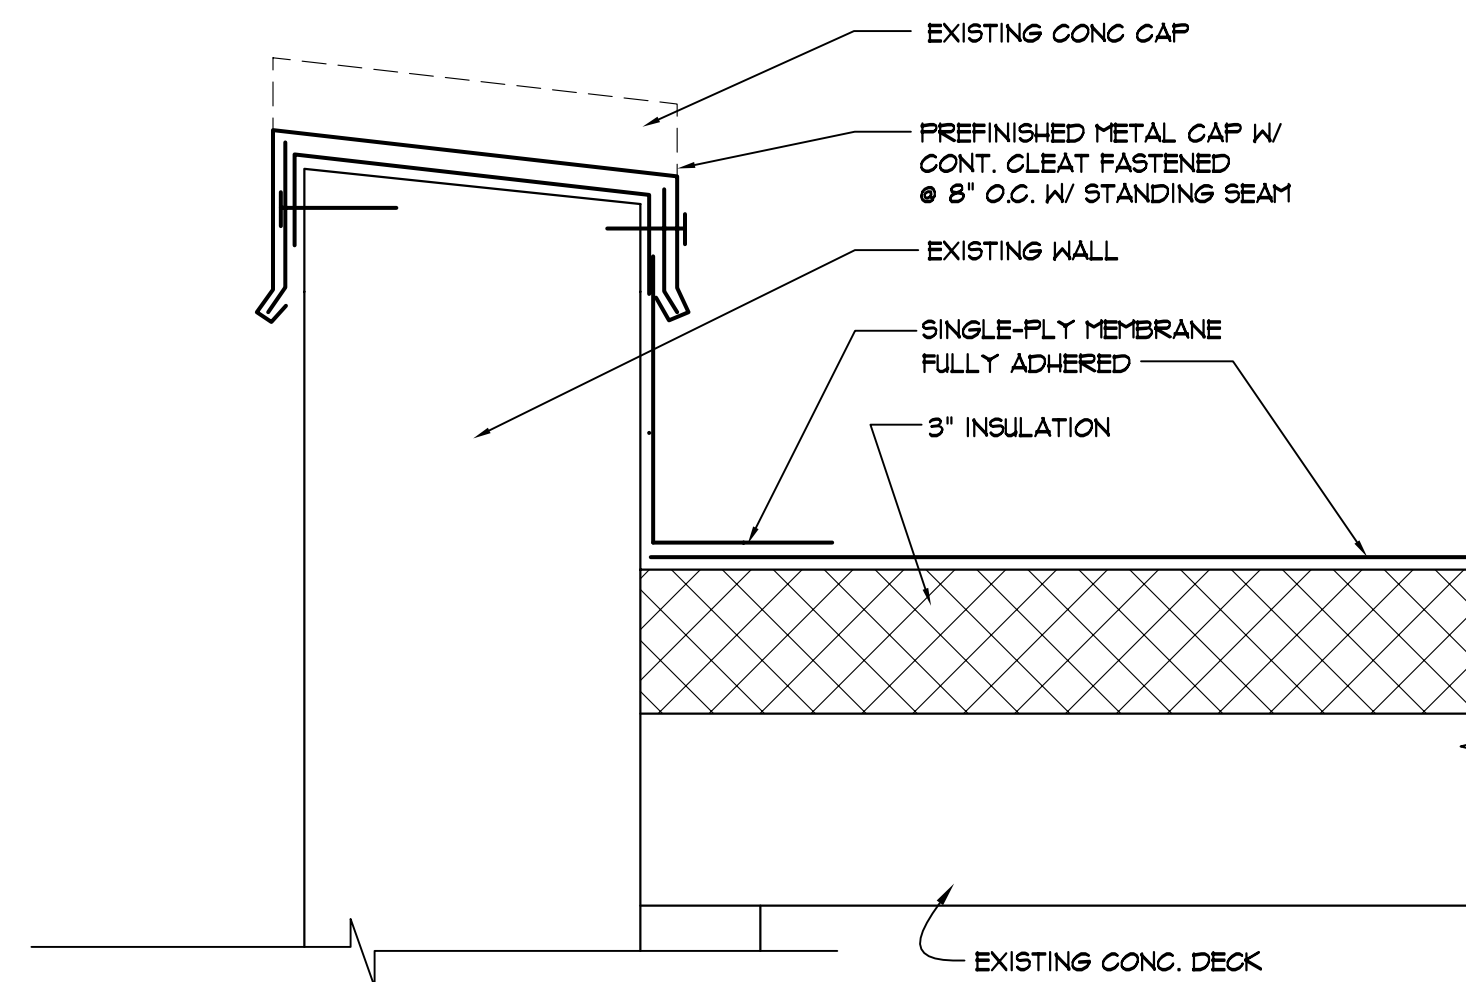

1 PARAPET DETAIL
3" = 1'-0"

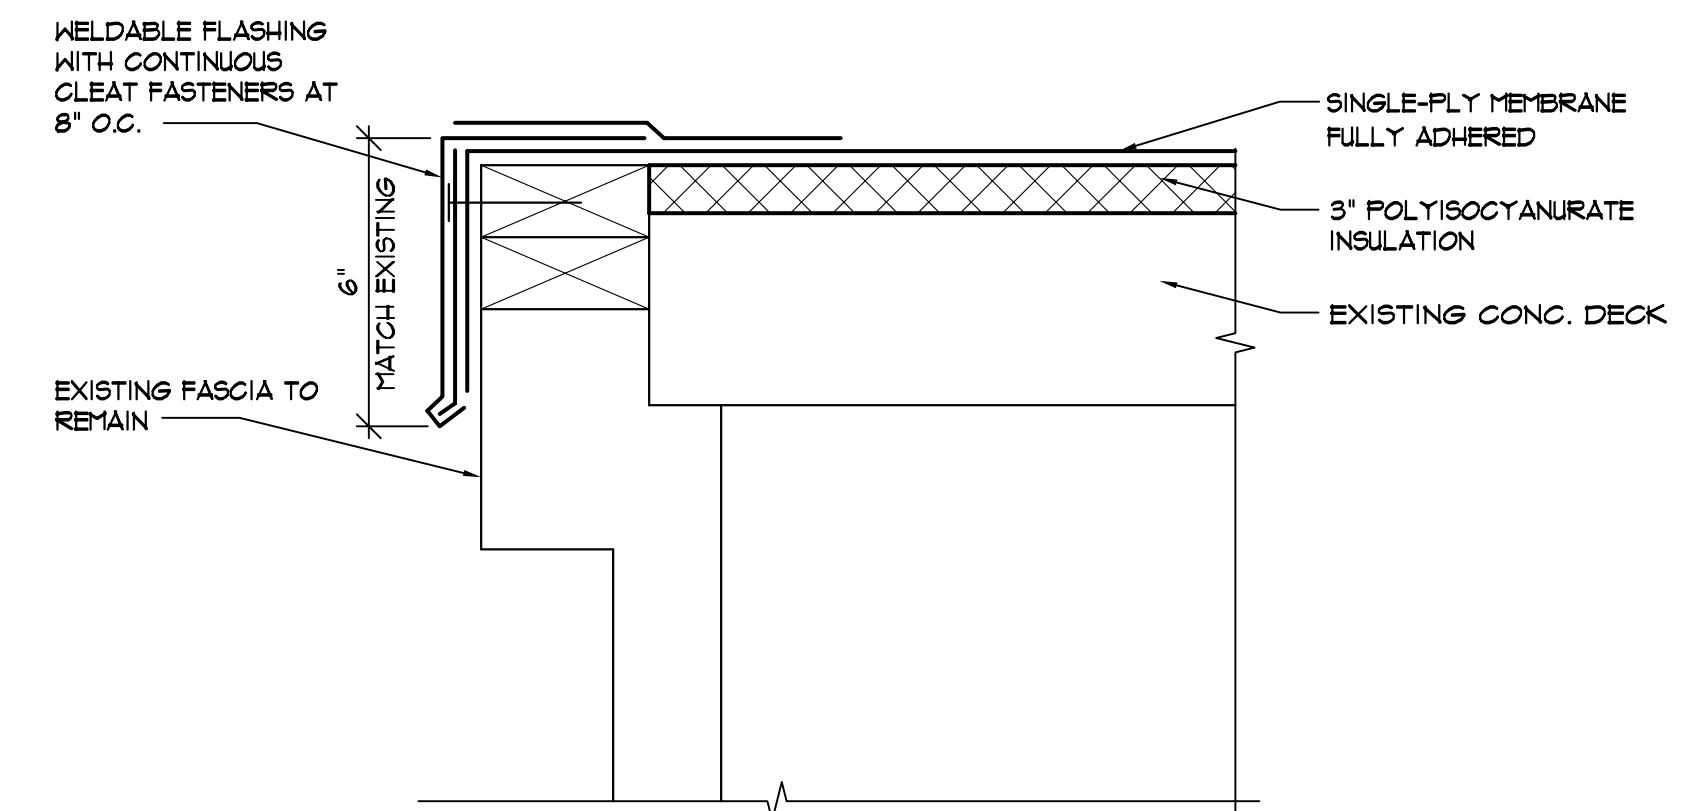

6 FASCIA DETAIL
3" = 1'-0"

620 24th Street Ogden, Utah 84401

RICHARDS
BOY
architects
a professional corporation

Phone: (801) 394-3033 Fax: (801) 394-9064
E-mail: mail@richarchitects.net

REVISED:

PROJECT NUMBER

0706

DATE

MAY 30, 2007

DRAWN BY

T.BRADBURY

PROJECT:

WSU SOCIAL SCIENCE BLDG
REROOF

PROJECT ADDRESS:

3850 UNIVERSITY CIRCLE
OGDEN, UTAH 84408

SHEET TITLE:

ROOF DETAILS

SHEET NO.

A-2