


VICINITY MAP  
NOT TO SCALE

# CUCF ROADWAY IMPROVEMENTS PROJECT GUNNISON, UTAH


DFCM PROJECT NO. 08184110

## SHEET INDEX



CD101	TITLE SHEET
CD102	BASE BID
CD103	BASE BID
CD104	BASE BID
CD105	BASE BID
CD106	BASE BID
CD107	BASE BID / ALTERNATE BID
CD108	ALTERNATE BID
CD109	SECTIONS AND DETAILS

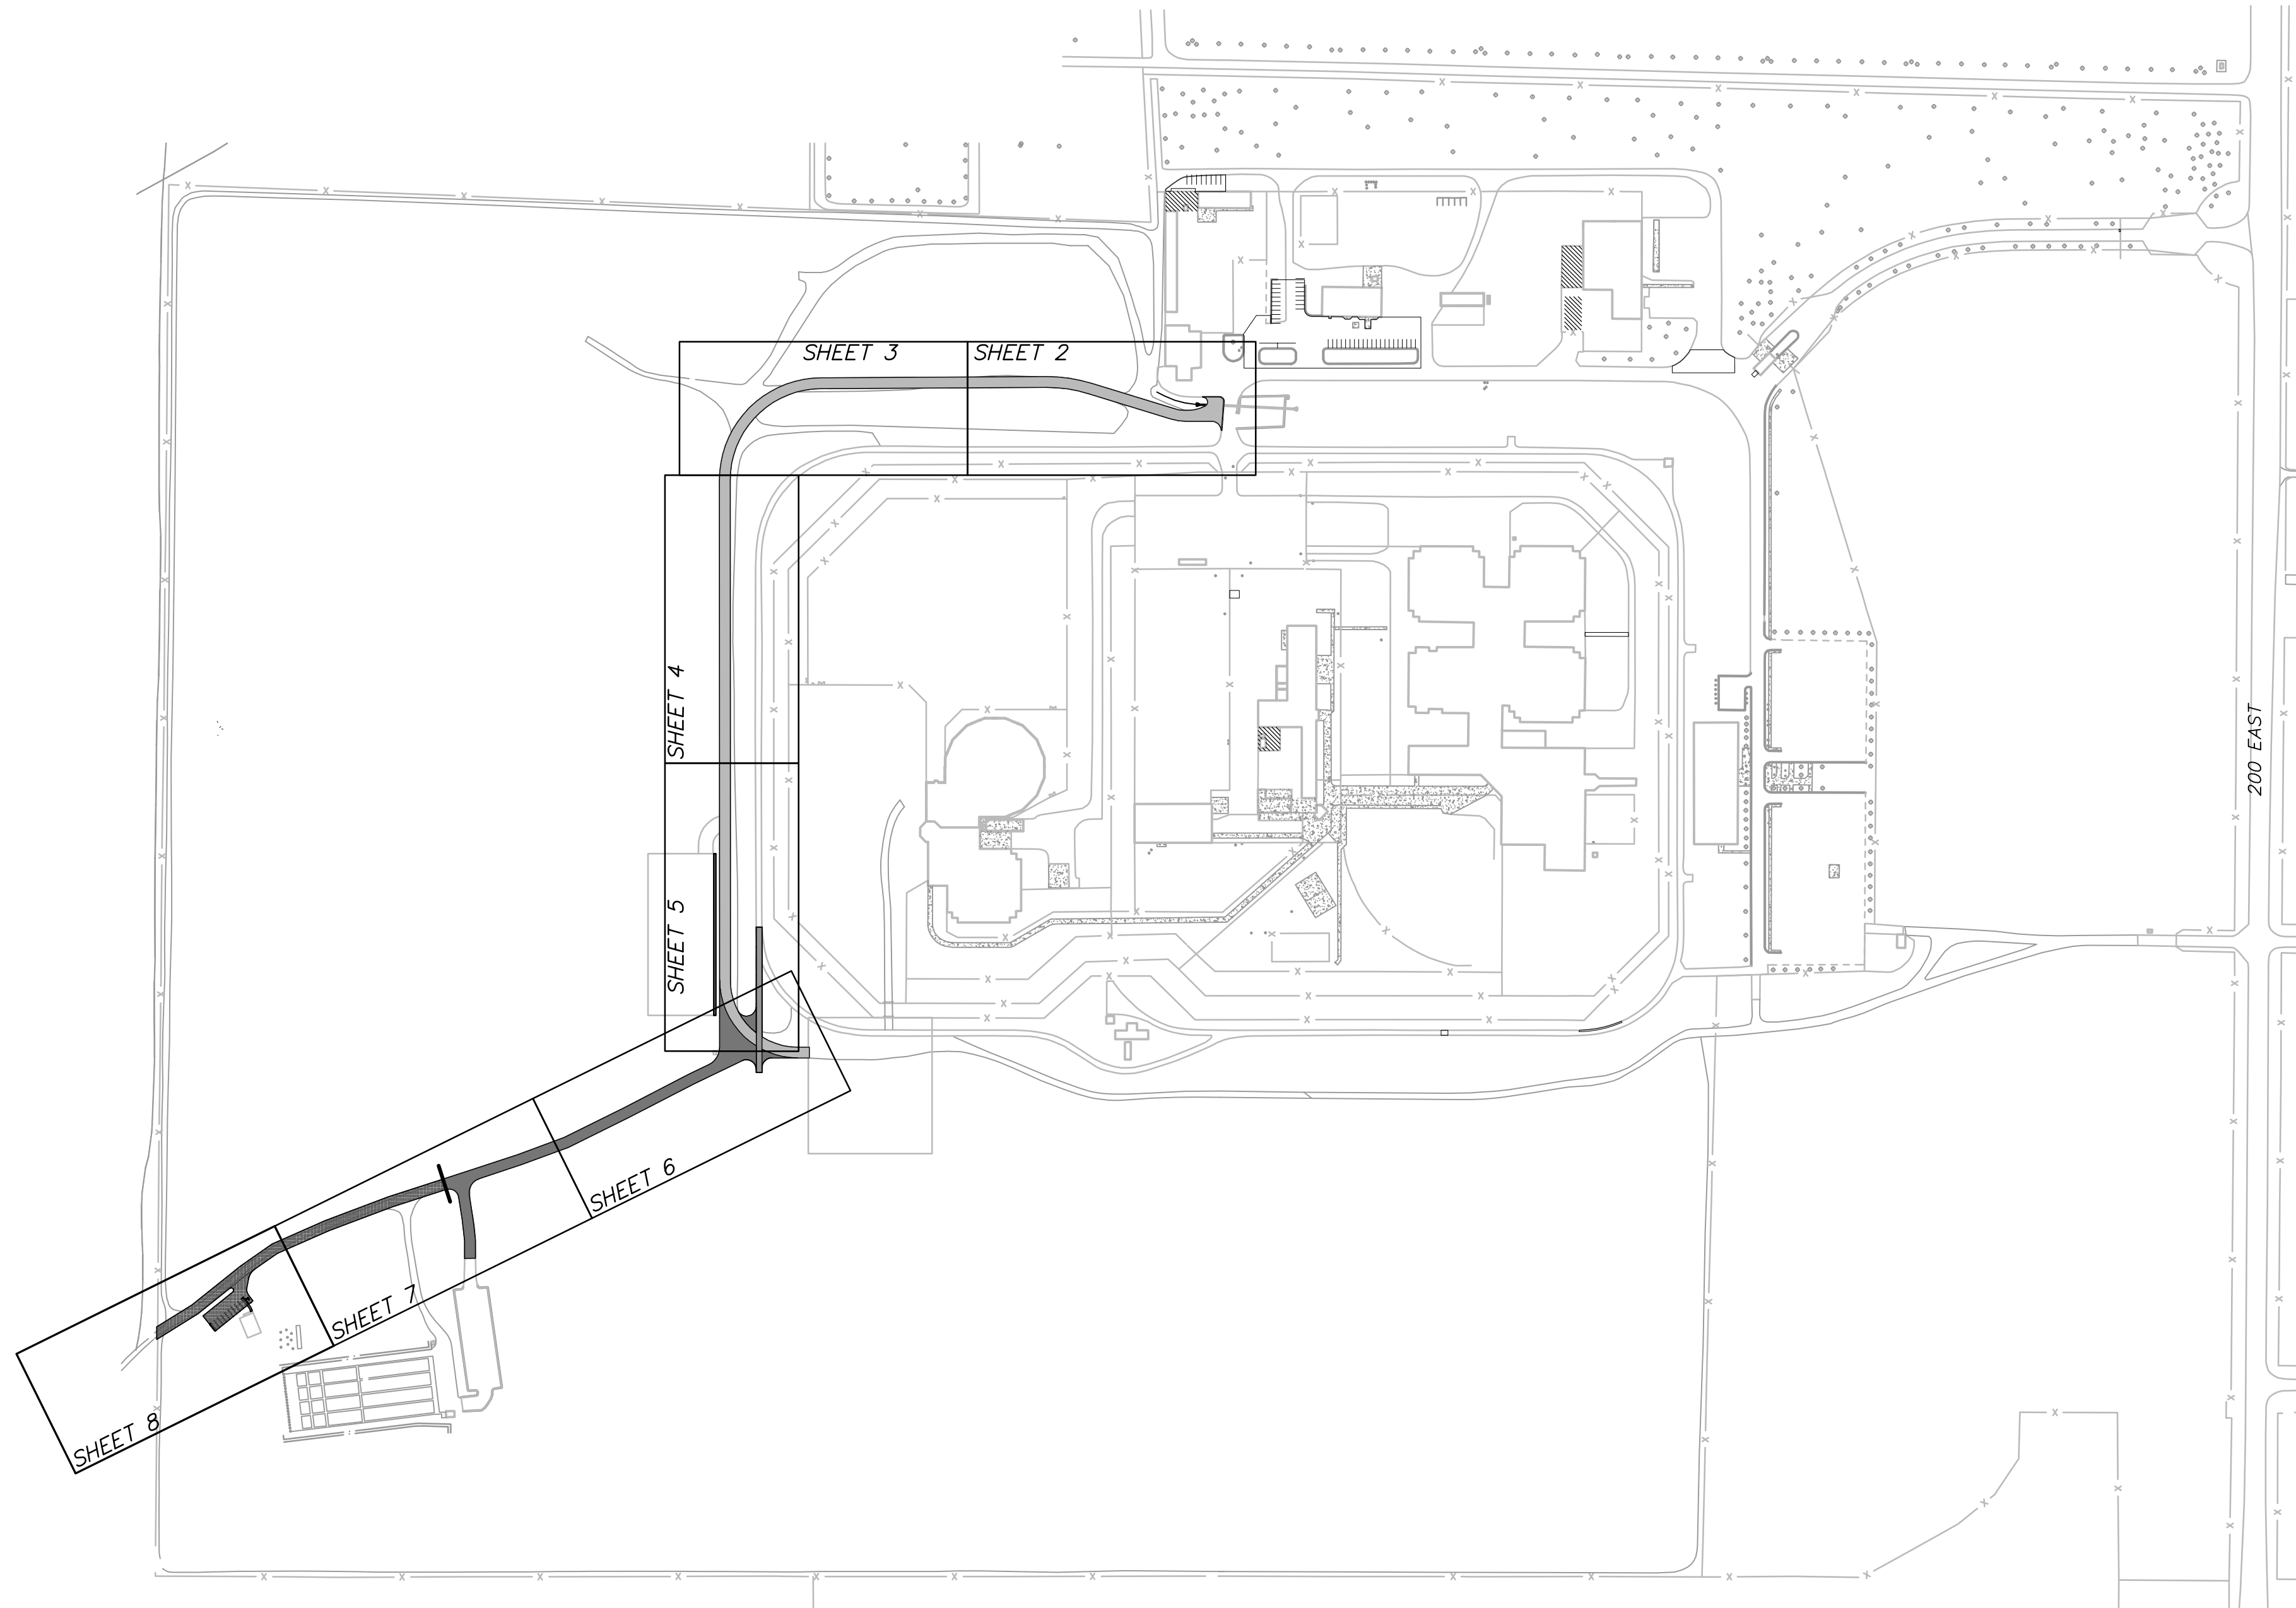


BASE BID QUANTITIES		
WORK ITEM	QUANTITY	UNIT
CLEAR AND GRUB	43,528	SF
SD PIPE (FIELD VERIFY TYPE AND SIZE)	40	LF
RELOCATE FLARED END SECTION	1	EA
CONNECT TO EXISTING SD	1	EA
SAWCUT AND REMOVE ASPHALT PAVEMENT	143	LF
3" THICK ASPHALTIC CONCRETE	28,079	SF
5" THICK ASPHALTIC CONCRETE	55,007	SF
UNTREATED BASE COURSE	2,218	CY
4" SOLID YELLOW PAINTED CENTERLINE STRIPE	3,406	LF
ALTERNATE BID QUANTITIES		
3" THICK ASPHALTIC CONCRETE	19,477	SF
UNTREATED BASE COURSE	601	CY
4" SOLID YELLOW PAINTED CENTERLINE STRIPE	654	LF
4" WHITE PARKING LOT PAINTED MARKINGS	272	LF

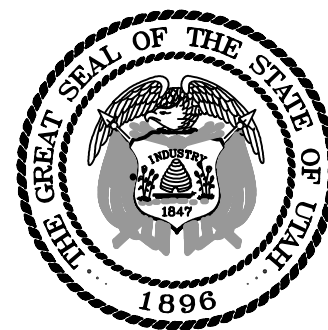

State of Utah—Department of Administrative Services  
DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT  
4110 State Office Building/Salt Lake City, Utah 84114/538-3018

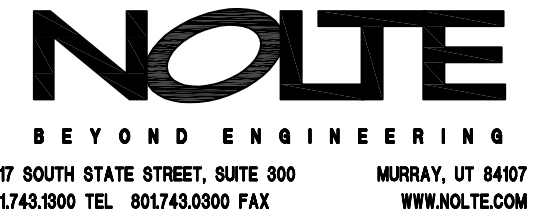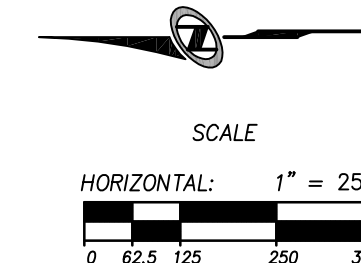

CREATED BY: NOLTE ASSOCIATES

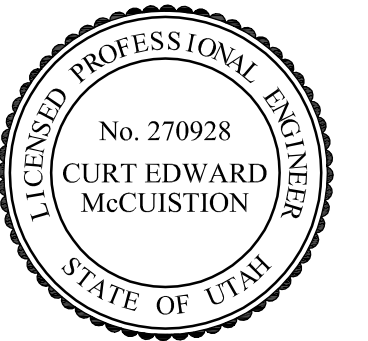

SITE/LOCATION

CENTRAL UTAH  
CORRECTIONAL  
FACILITY  
255 EAST 300 NORTH  
GUNNISON, UTAH

PROJECT TITLE

ROADWAY  
IMPROVEMENTS

C	7/17/08	FINAL REVIEW - DFCM
B	6/26/08	90% REVIEW PLANS
A	6/12/08	CONCEPT PLANS
MARK	DATE	DESCRIPTION

ISSUE TYPE: BID SET

ISSUE DATE: JUNE 2008

DFCM PROJECT NO: 08184110

CAD PROJECT NO: SLB0495

CAD DWG FILE: IP01T

DRAWN BY: CLN

CHK'D BY: CEM

COPYRIGHT: STATE OF UTAH

SHEET TITLE

TITLE SHEET

SHEET NUMBER

CD101

SHEET 1 OF 9




GENERAL NOTES

1. THIS FACILITY IS IN OPERATION 24 HOURS A DAY, 7 DAYS A WEEK. CONTRACTOR TO MAINTAIN ACCESS TO ALL ROADS AND PARKING LOTS THROUGHOUT CONSTRUCTION.
2. ALL WORK SHALL BE SCHEDULED THROUGH TERRY JACOBS (435) 528-3050 OR PAUL TAYLOR (435) 528-6482.
3. CONTRACTOR TO VERIFY LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO ANY CONSTRUCTION OR EXCAVATION.
4. ALL WORK TO BE DONE ACCORDING TO LOCAL, COUNTY, STATE, AND FEDERAL GUIDELINES AS APPLICABLE, SPECIFICATION DETAILS.
5. NOTIFY OWNER 48 HOURS IN ADVANCE OF ANY WATER SHUT OFFS AND ANTICIPATED DURATION.
6. NO CHANGE IN DESIGN, LOCATION OR GRADE WILL BE MADE BY THE CONTRACTOR WITHOUT WRITTEN APPROVAL.
7. FOR EXISTING UTILITY INFORMATION AND LOCATION CONTACT PAUL TAYLOR (435) 528-6482.
8. ALL CONSTRUCTION SIGNAGE, BARRICADE, TRAFFIC CONTROL DEVICES, ETC., SHALL CONFORM TO THE LATEST EDITION OF THE M.U.C.T.D. CONTRACTOR WILL MAINTAIN SUCH SO THEY ARE PROPERLY PLACED AND VISIBLE AT ALL TIMES.
9. ALL ROAD AND PARKING STRIPING SHALL BE ACCOMPLISHED IN ACCORDANCE WITH DFCM, LOCAL, COUNTY, AND FEDERAL GUIDELINES AND THE LATEST EDITION ON THE M.U.T.C.D. AS APPLICABLE.
10. COORDINATE WITH OWNER FOR NECESSARY DEVEGITATION ALONG SHOULDERS OF ROADWAY.


CONSTRUCTION NOTES

- 1 RELOCATE EXISTING STORM DRAIN FLARED END SECTION ADDING SD PIPE TO MATCH EXISTING SIZE, MATERIAL AND SLOPE
- 2 REGRADE ROCK DITCH AS NEEDED FOR POSSITIVE DRAINAGE
- 3 REMOVE AND SALVAGE ROCK FROM EXISTING DITCH (BY CUCF), FILL AREA WITH STRUCTURAL FILL (BY CONTRACTOR)
- 4 MATCH EXISTING DITCH FLOW LINE
- 5 SAW CUT (1' MIN.), TRIM, TACK AND JOIN NEW PAVEMENT TO EXISTING (TYP.)
- 6 CONSTRUCT 22' WIDE ASPHALT ROADWAY PER PAVEMENT SECTION A/CD109 WITH 2% CROSS SLOPE FROM CENTERLINE CROWN
- 7 NEW ASPHALT TO MATCH EXISTING GRADE (TYP.)
- 8 MAINTAIN POSITIVE SLOPE 0.50% MIN. (TYP.)
- 9 PAINT 4" SOLID YELLOW CENTERLINE STRIPE


LEGEND

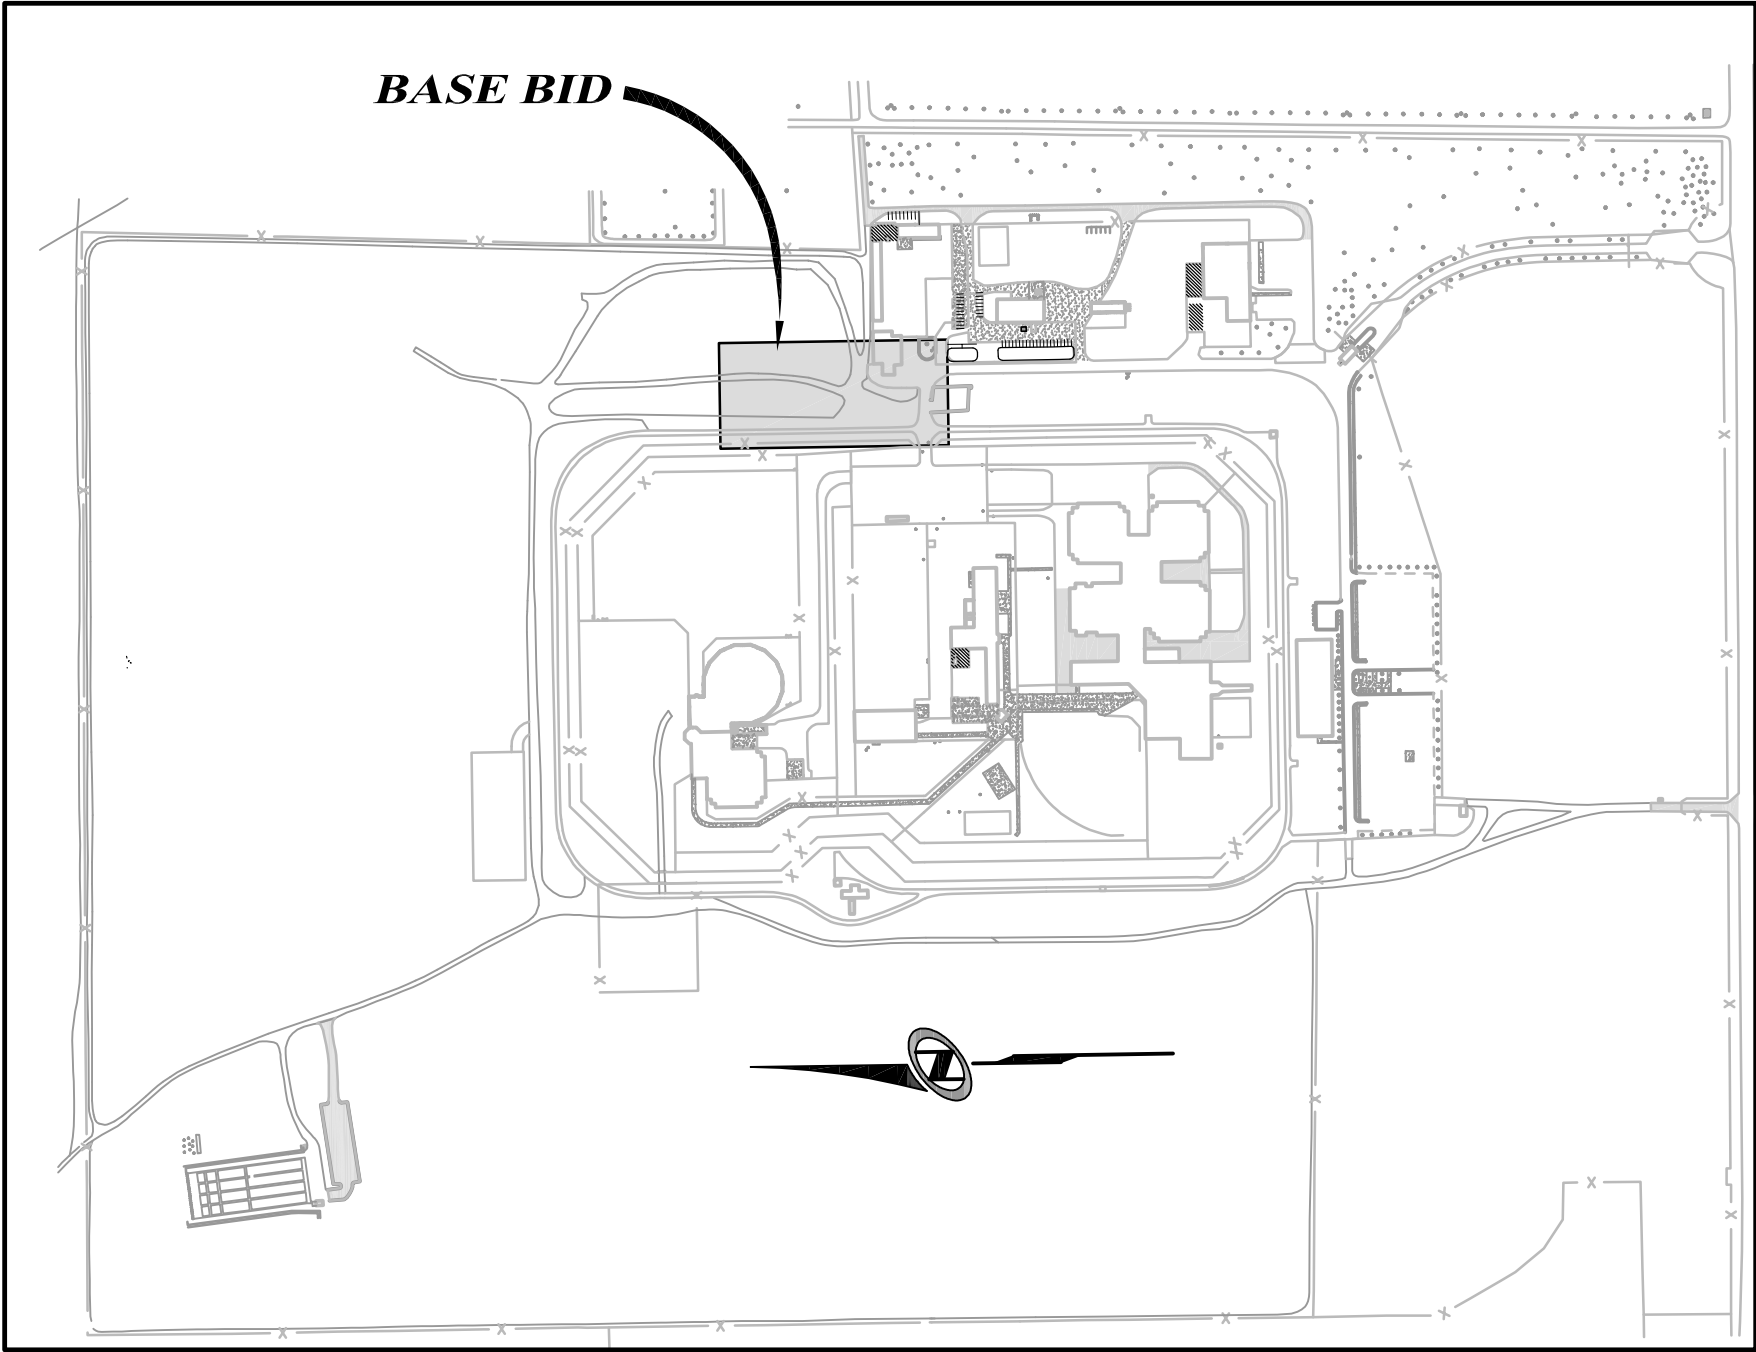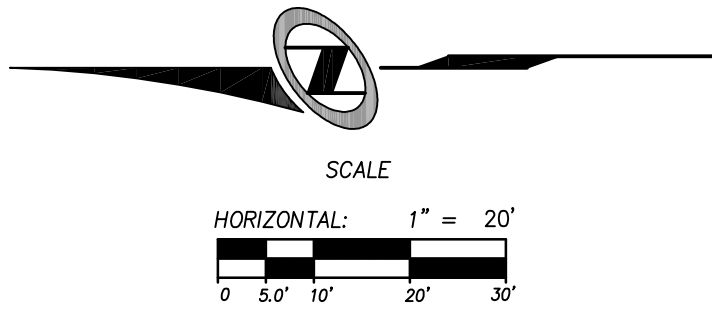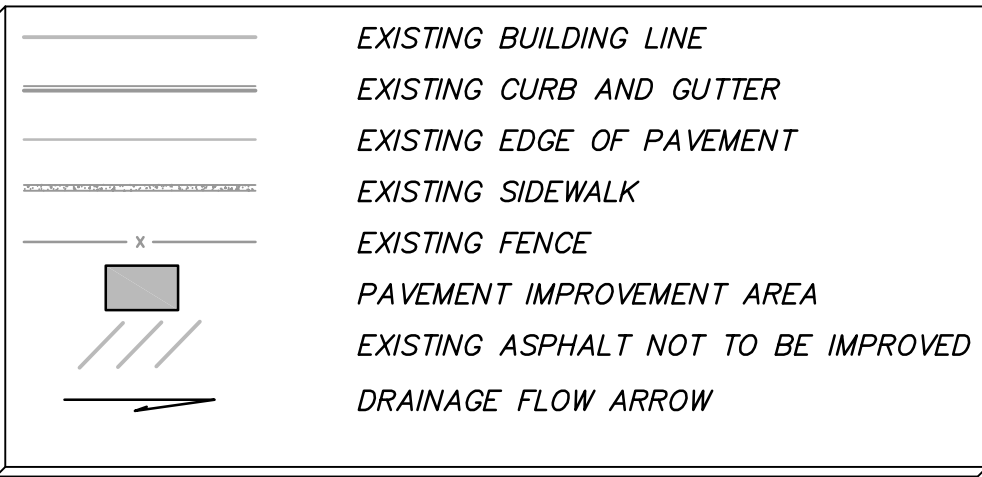

KEYMAP  
N.T.S.

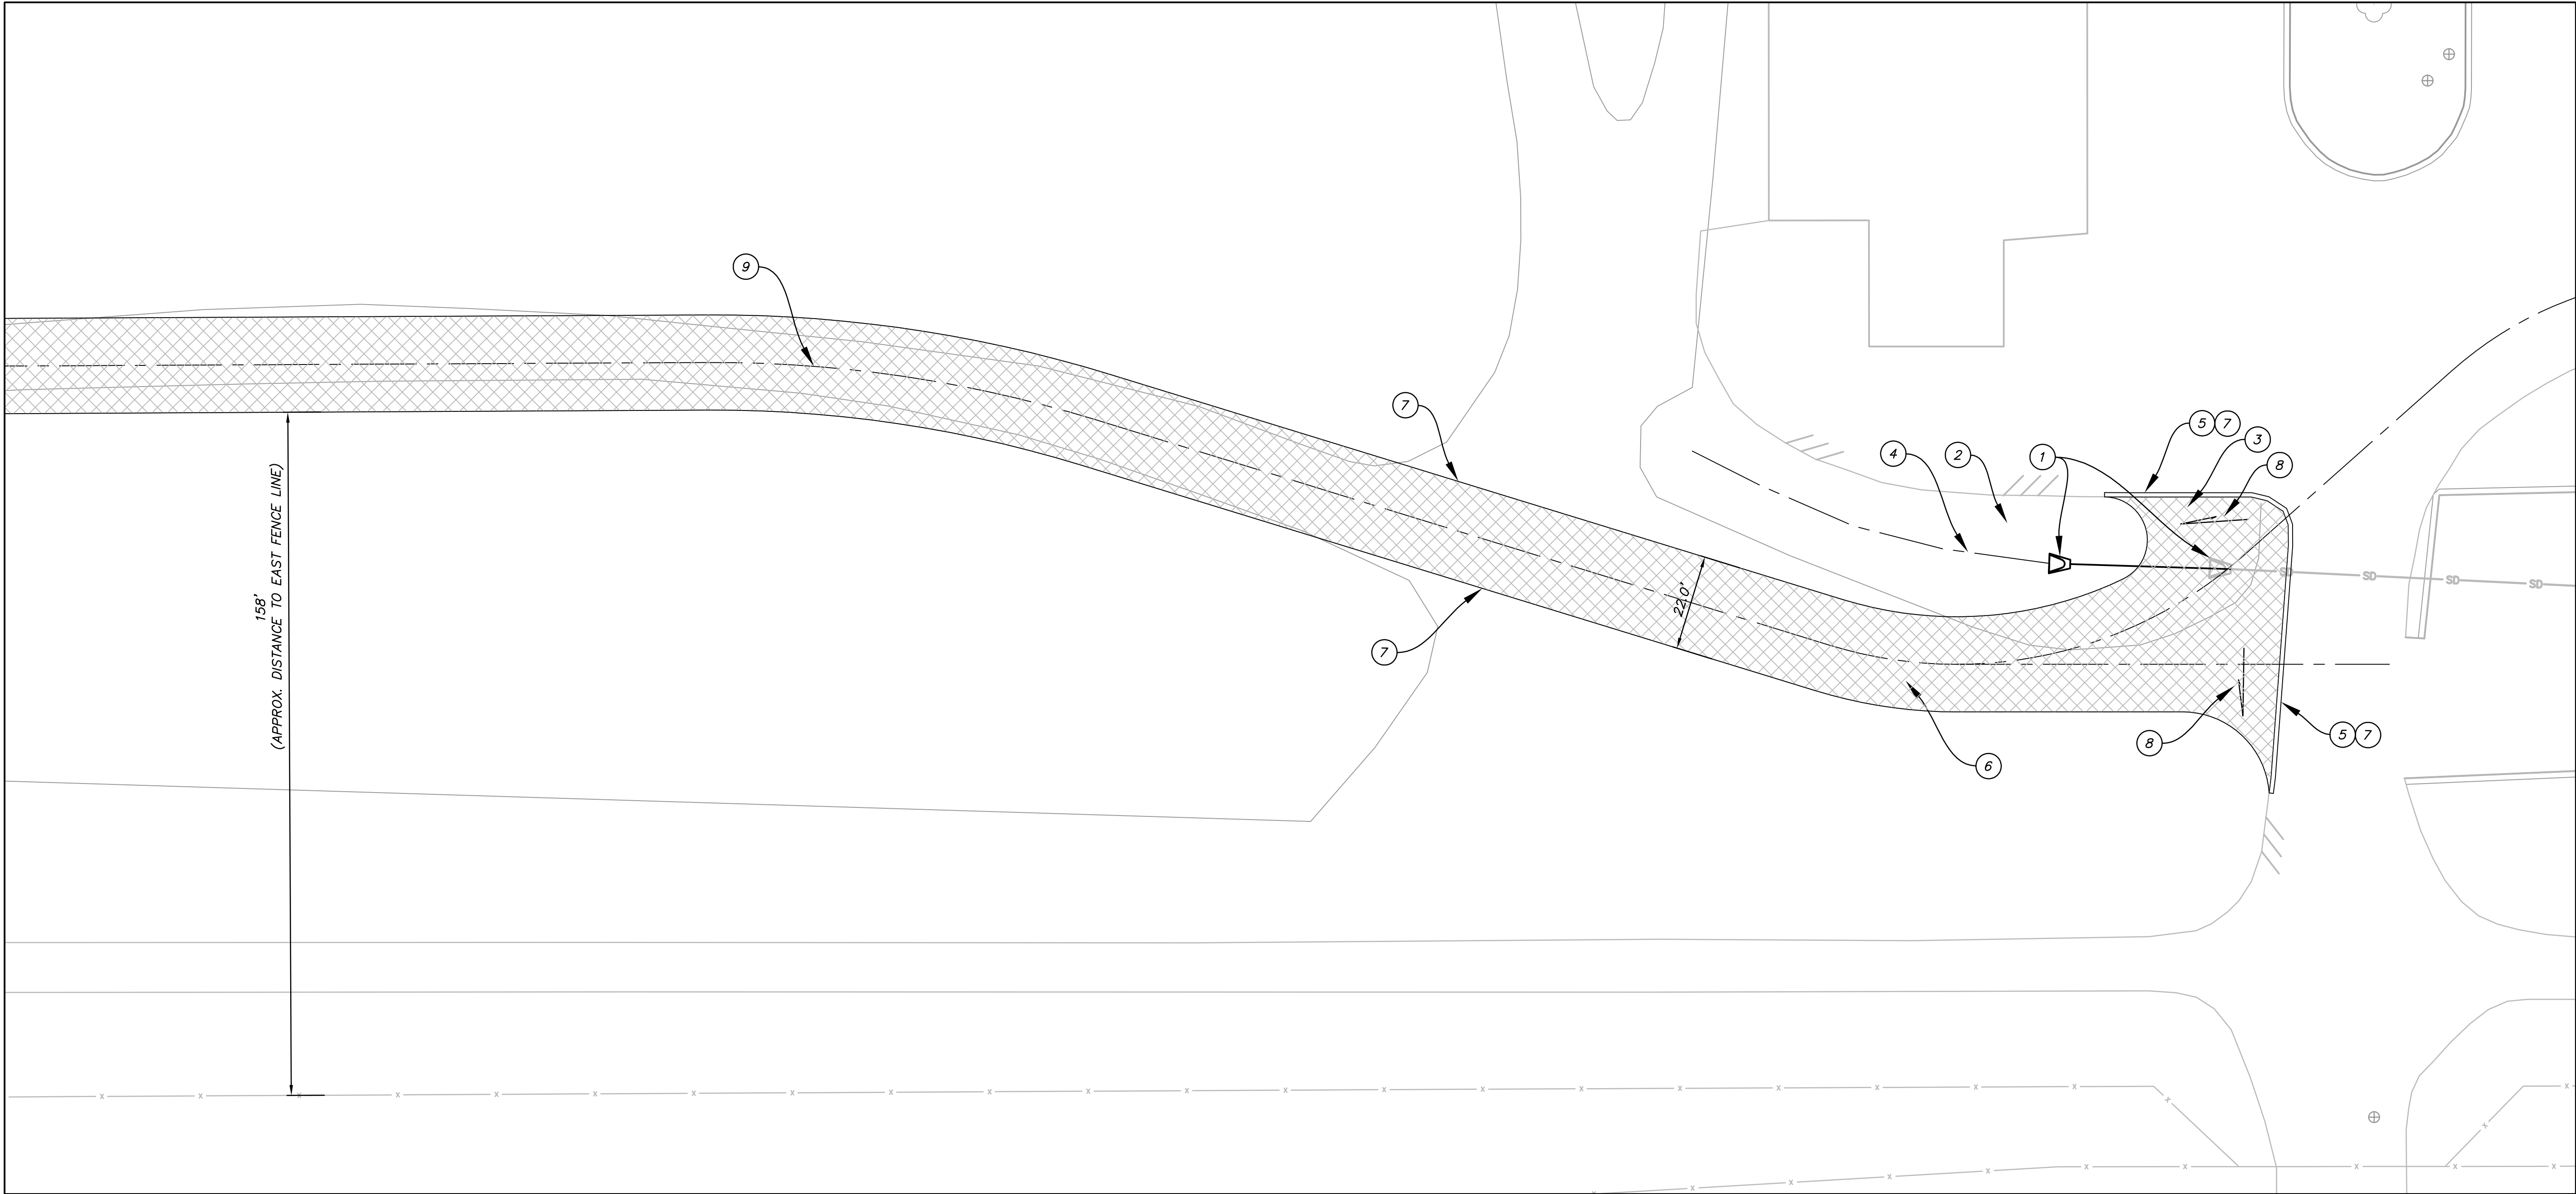

BASE BID

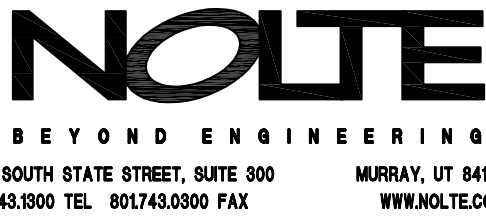

CREATED BY: NOLTE ASSOCIATES



SITE/LOCATION

CENTRAL UTAH  
CORRECTIONAL  
FACILITY  
255 EAST 300 NORTH  
GUNNISON, UTAH

PROJECT TITLE

ROADWAY  
IMPROVEMENTS

MARK	DATE	DESCRIPTION
C	7/17/08	FINAL REVIEW - DFCM
B	6/26/08	90% REVIEW PLANS
A	6/12/08	CONCEPT PLANS

ISSUE TYPE: BID SET

ISSUE DATE: JUNE 2008

DFCM PROJECT NO: 08184110

CAD PROJECT NO: SLB0495

CAD DWG FILE: IP02SP

DRAWN BY: CLN

CHK'D BY: CEM

COPYRIGHT: STATE OF UTAH

SHEET TITLE

BASE BID

SHEET NUMBER

CD102

SHEET 2 OF 9



GENERAL NOTES

1. THIS FACILITY IS IN OPERATION 24 HOURS A DAY, 7 DAYS A WEEK. CONTRACTOR TO MAINTAIN ACCESS TO ALL ROADS AND PARKING LOTS THROUGHOUT CONSTRUCTION.
2. ALL WORK SHALL BE SCHEDULED THROUGH TERRY JACOBS (435) 528-3050 OR PAUL TAYLOR (435) 528-6482.
3. CONTRACTOR TO VERIFY LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO ANY CONSTRUCTION OR EXCAVATION.
4. ALL WORK TO BE DONE ACCORDING TO LOCAL, COUNTY, STATE, AND FEDERAL GUIDELINES AS APPLICABLE, SPECIFICATION DETAILS.
5. NOTIFY OWNER 48 HOURS IN ADVANCE OF ANY WATER SHUT OFFS AND ANTICIPATED DURATION.
6. NO CHANGE IN DESIGN, LOCATION OR GRADE WILL BE MADE BY THE CONTRACTOR WITHOUT WRITTEN APPROVAL.
7. FOR EXISTING UTILITY INFORMATION AND LOCATION CONTACT PAUL TAYLOR (435) 528-6482.
8. ALL CONSTRUCTION SIGNAGE, BARRICADE, TRAFFIC CONTROL DEVICES, ETC., SHALL CONFORM TO THE LATEST EDITION OF THE M.U.C.T.D. CONTRACTOR WILL MAINTAIN SUCH SO THEY ARE PROPERLY PLACED AND VISIBLE AT ALL TIMES.
9. ALL ROAD AND PARKING STRIPING SHALL BE ACCOMPLISHED IN ACCORDANCE WITH DFCM, LOCAL, COUNTY, AND FEDERAL GUIDELINES AND THE LATEST EDITION ON THE M.U.T.C.D. AS APPLICABLE.
10. COORDINATE WITH OWNER FOR NECESSARY DEVEGITATION ALONG SHOULDERS OF ROADWAY.

CONSTRUCTION NOTES

1. CONSTRUCT 22' WIDE ASPHALT ROADWAY PER PAVEMENT SECTION A/CD109 WITH 2% CROSS SLOPE FROM CENTERLINE CROWN
2. NEW ASPHALT TO MATCH EXISTING GRADE (TYP.)
3. PAINT 4" SOLID YELLOW CENTERLINE STRIPE

LEGEND

EXISTING BUILDING LINE

EXISTING CURB AND GUTTER

EXISTING EDGE OF PAVEMENT



EXISTING SIDEWALK

EXISTING FENCE


PAVEMENT IMPROVEMENT AREA

EXISTING ASPHALT NOT TO BE IMPROVED

DRAINAGE FLOW ARROW

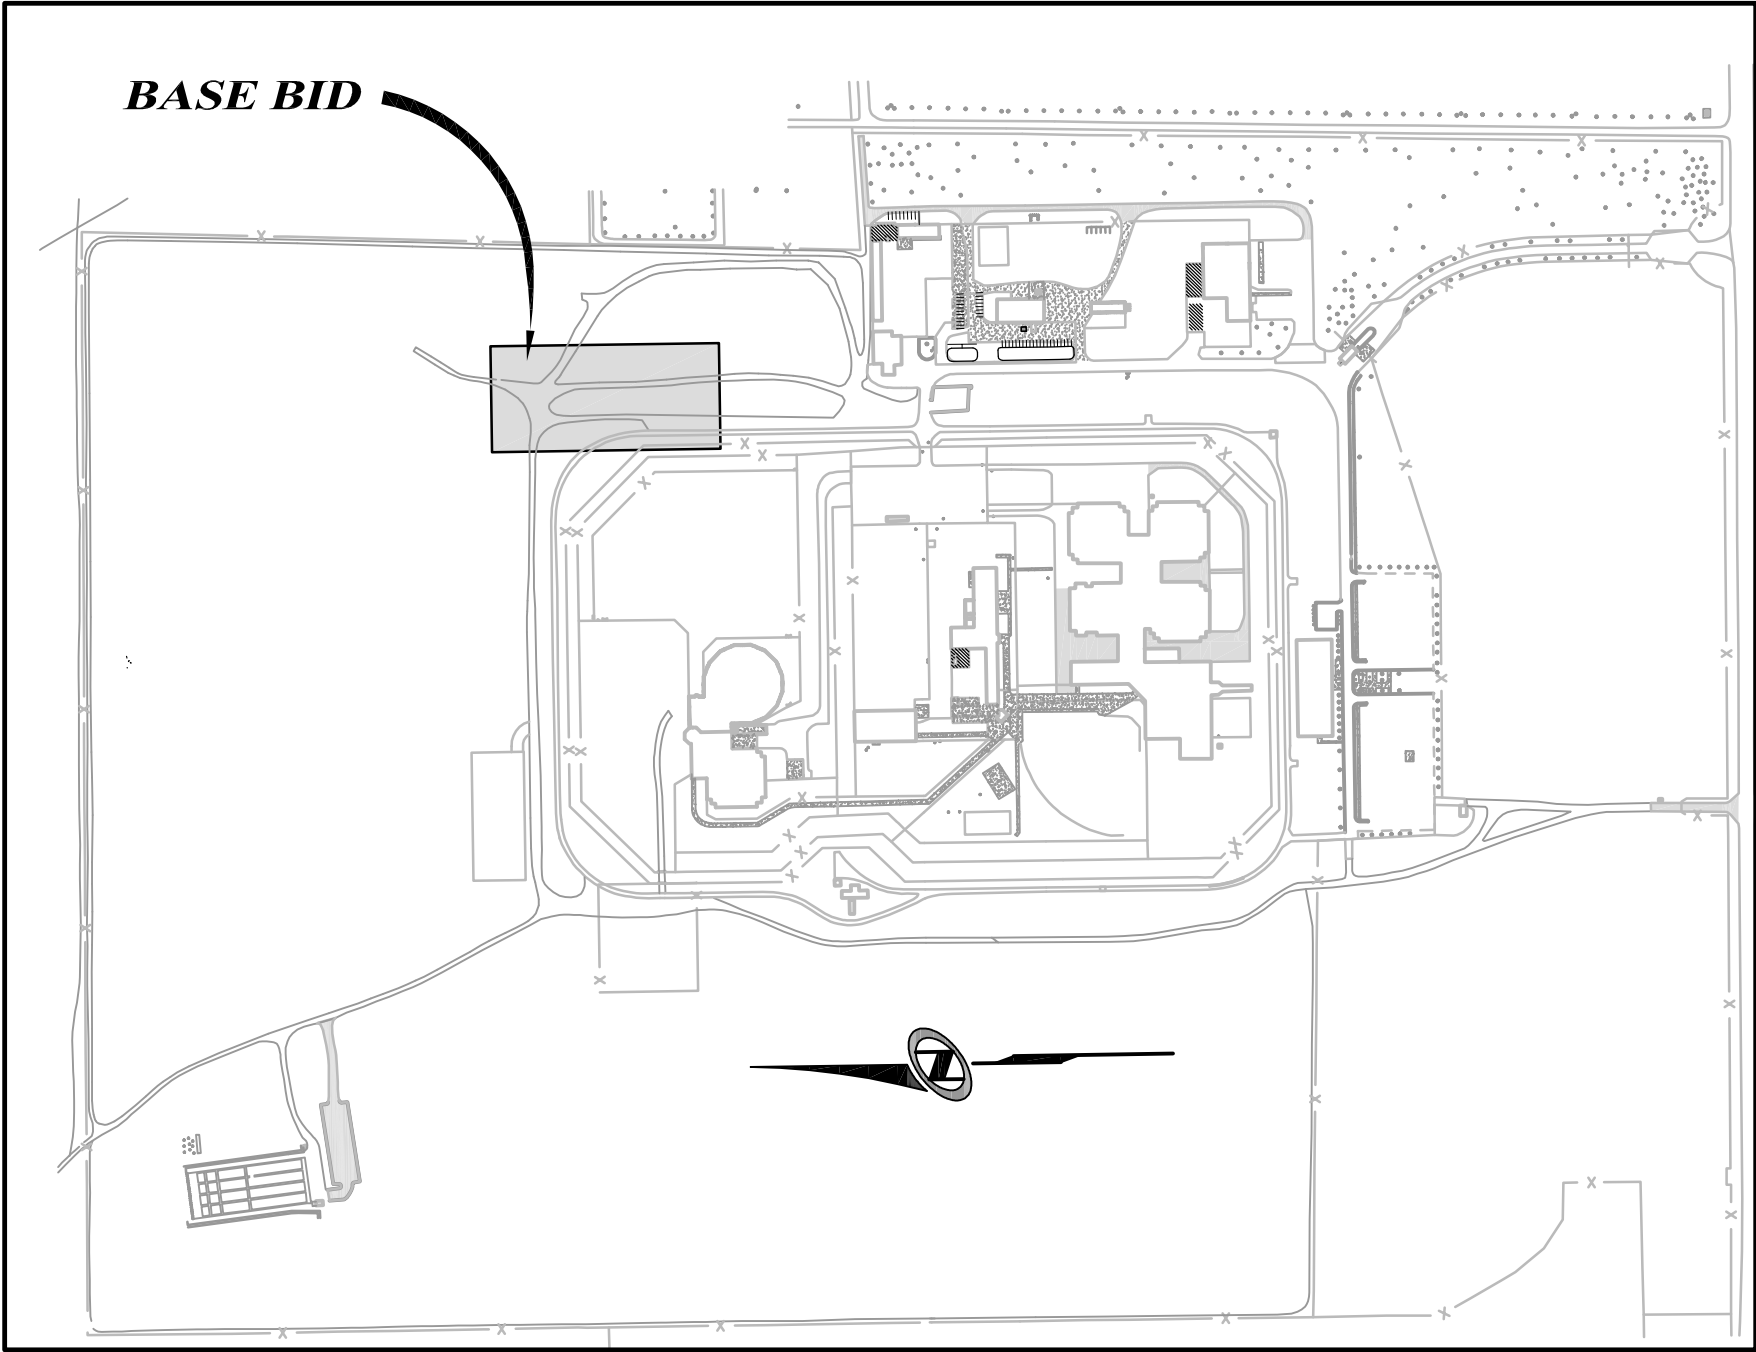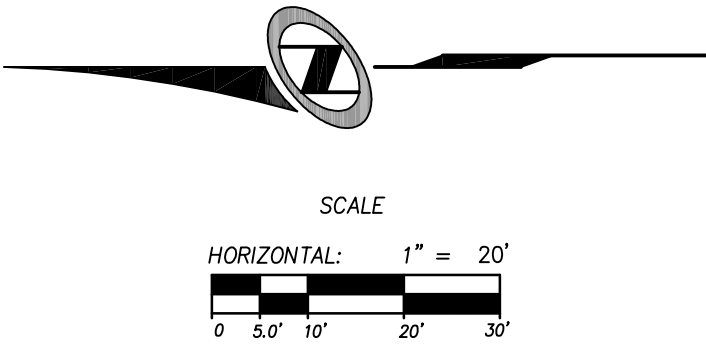


KEYMAP  
N.T.S.

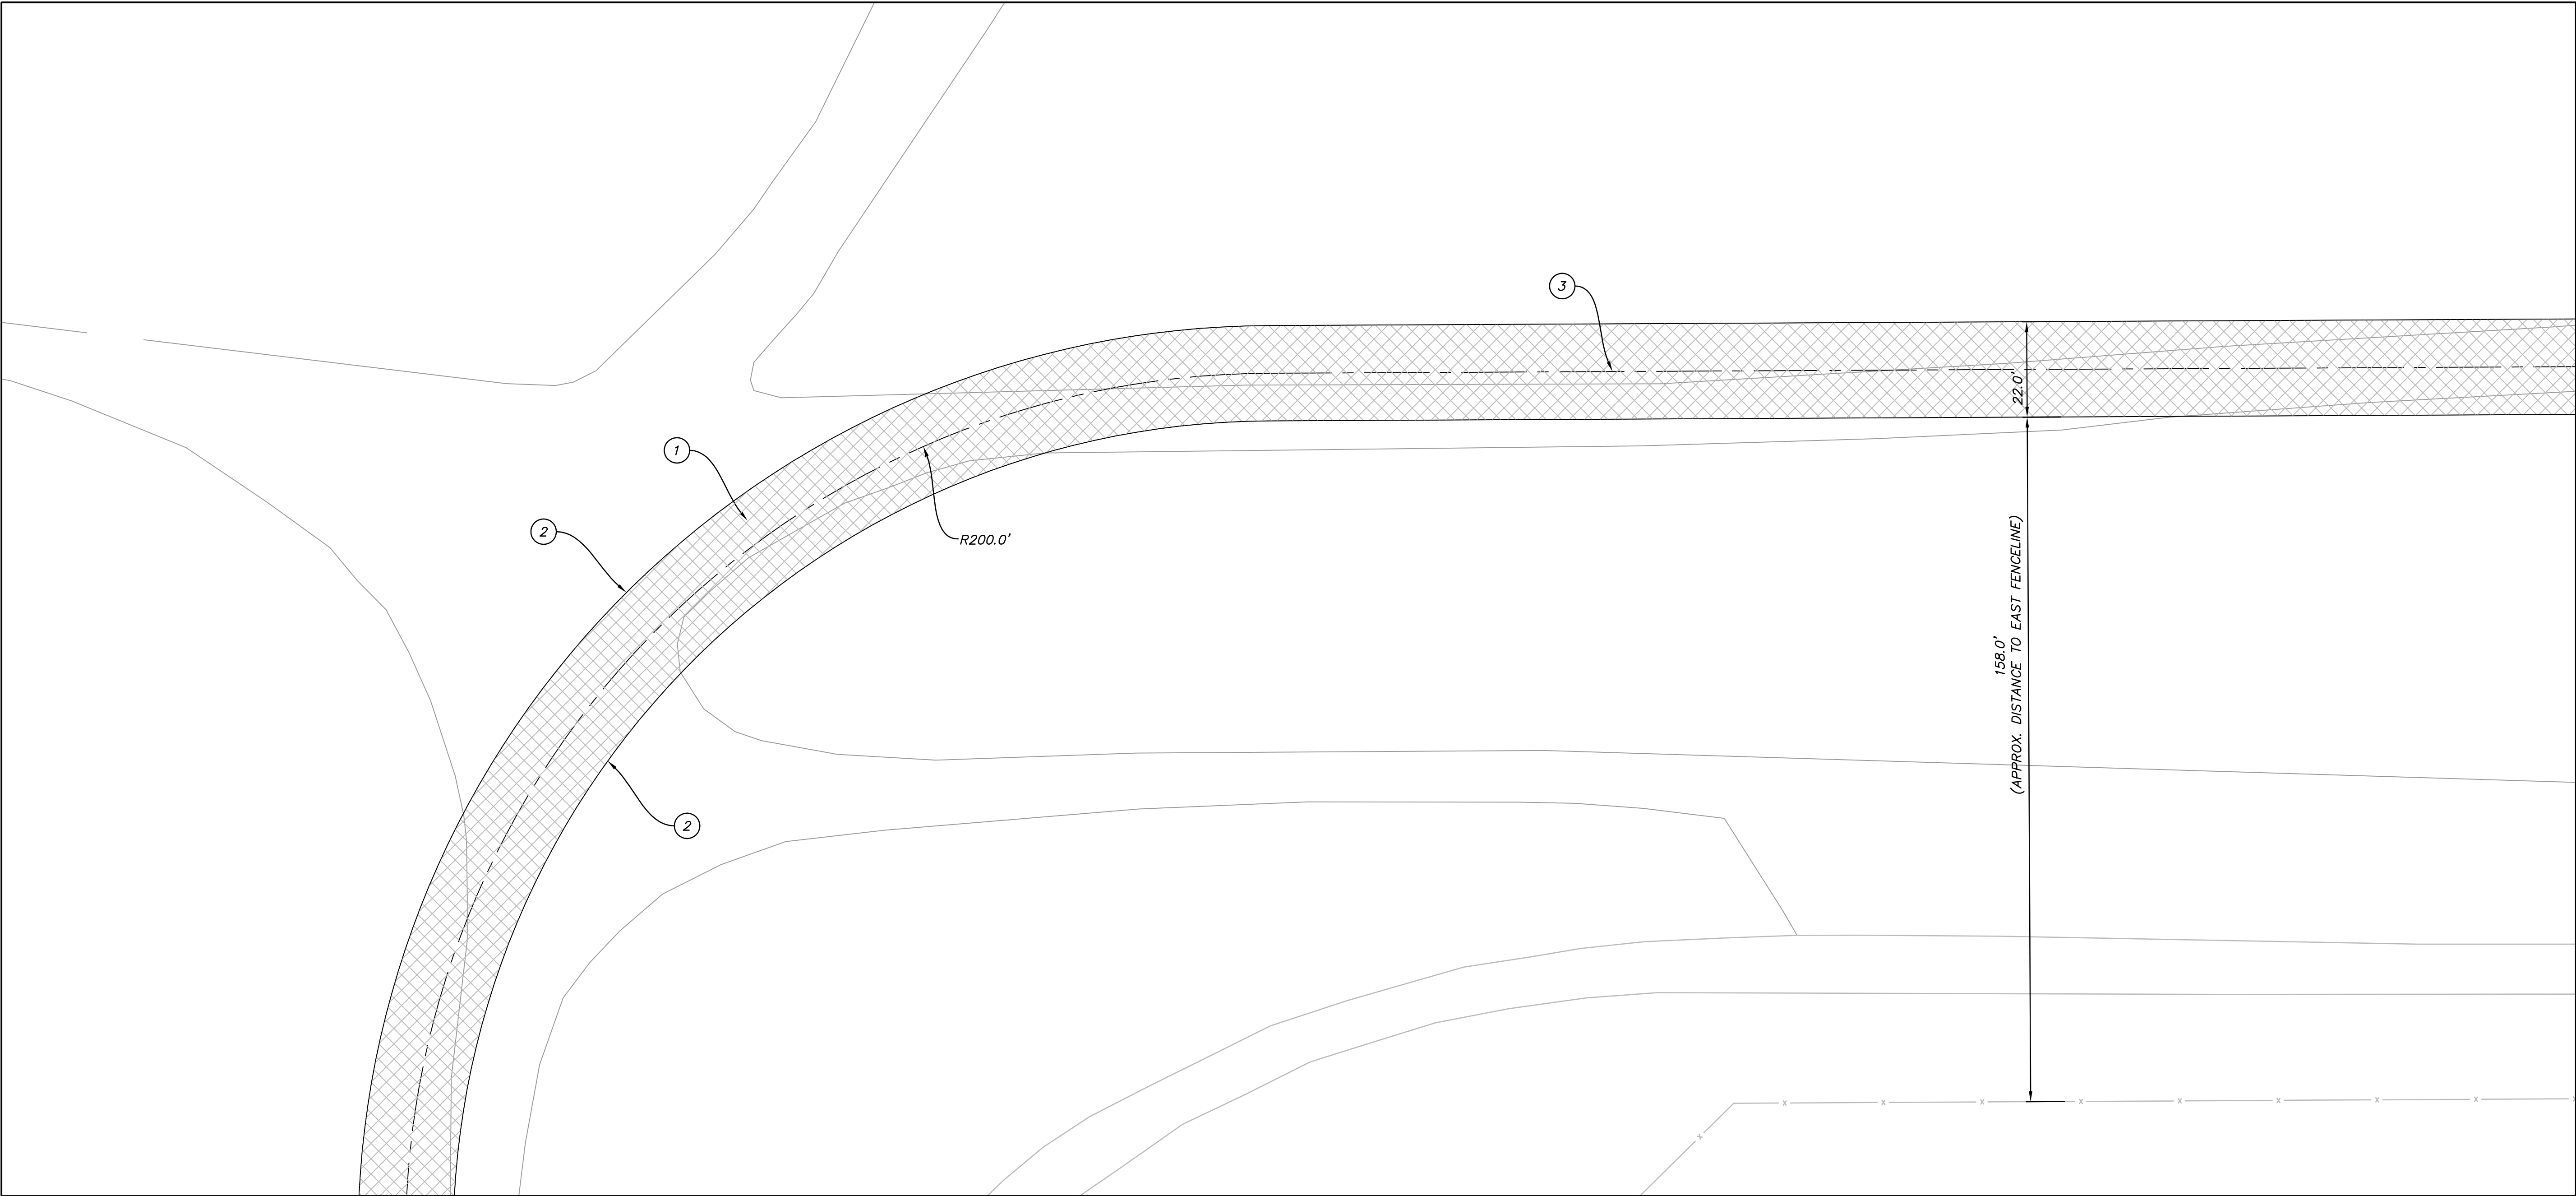

MATCHLINE – SEE SHEET 4

BASE BID

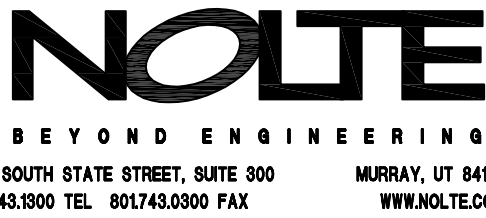

CREATED BY: NOLTE ASSOCIATES



SITE/LOCATION

CENTRAL UTAH  
CORRECTIONAL  
FACILITY  
255 EAST 300 NORTH  
GUNNISON, UTAH

PROJECT TITLE

ROADWAY  
IMPROVEMENTS

C	7/17/08	FINAL REVIEW – DFCM
B	6/26/08	90% REVIEW PLANS
A	6/12/08	CONCEPT PLANS
MARK	DATE	DESCRIPTION

ISSUE TYPE: BID SET

ISSUE DATE: JUNE 2008

DFCM PROJECT NO: 08184110

CAD PROJECT NO: SLB0495

CAD DWG FILE: IP03SP

DRAWN BY: CLN

CHK'D BY: CEM

COPYRIGHT: STATE OF UTAH

SHEET TITLE

BASE BID

SHEET NUMBER

CD103

SHEET 3 OF 9

GENERAL NOTES



1. THIS FACILITY IS IN OPERATION 24 HOURS A DAY, 7 DAYS A WEEK. CONTRACTOR TO MAINTAIN ACCESS TO ALL ROADS AND PARKING LOTS THROUGHOUT CONSTRUCTION.
2. ALL WORK SHALL BE SCHEDULED THROUGH TERRY JACOBS (435) 528-3050 OR PAUL TAYLOR (435) 528-6482.
3. CONTRACTOR TO VERIFY LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO ANY CONSTRUCTION OR EXCAVATION.
4. ALL WORK TO BE DONE ACCORDING TO LOCAL, COUNTY, STATE, AND FEDERAL GUIDELINES AS APPLICABLE, SPECIFICATION DETAILS.
5. NOTIFY OWNER 48 HOURS IN ADVANCE OF ANY WATER SHUT OFFS AND ANTICIPATED DURATION.
6. NO CHANGE IN DESIGN, LOCATION OR GRADE WILL BE MADE BY THE CONTRACTOR WITHOUT WRITTEN APPROVAL.
7. FOR EXISTING UTILITY INFORMATION AND LOCATION CONTACT PAUL TAYLOR (435) 528-6482.
8. ALL CONSTRUCTION SIGNAGE, BARRICADE, TRAFFIC CONTROL DEVICES, ETC., SHALL CONFORM TO THE LATEST EDITION OF THE M.U.C.T.D. CONTRACTOR WILL MAINTAIN SUCH SO THEY ARE PROPERLY PLACED AND VISIBLE AT ALL TIMES.
9. ALL ROAD AND PARKING STRIPING SHALL BE ACCOMPLISHED IN ACCORDANCE WITH DFCM, LOCAL, COUNTY, AND FEDERAL GUIDELINES AND THE LATEST EDITION ON THE M.U.T.C.D. AS APPLICABLE.
10. COORDINATE WITH OWNER FOR NECESSARY DEVEGITATION ALONG SHOULDERS OF ROADWAY.

CONSTRUCTION NOTES


1. CONSTRUCT 22' WIDE ASPHALT ROADWAY PER PAVEMENT SECTION A/CD109 WITH 2% CROSS SLOPE FROM CENTERLINE CROWN
2. NEW ASPHALT TO MATCH EXISTING GRADE (TYP.)
3. PAINT 4" SOLID YELLOW CENTERLINE STRIPE

LEGEND

EXISTING BUILDING LINE  
EXISTING CURB AND GUTTER  
EXISTING EDGE OF PAVEMENT  
EXISTING SIDEWALK  
EXISTING FENCE  
PAVEMENT IMPROVEMENT AREA  
EXISTING ASPHALT NOT TO BE IMPROVED  
DRAINAGE FLOW ARROW

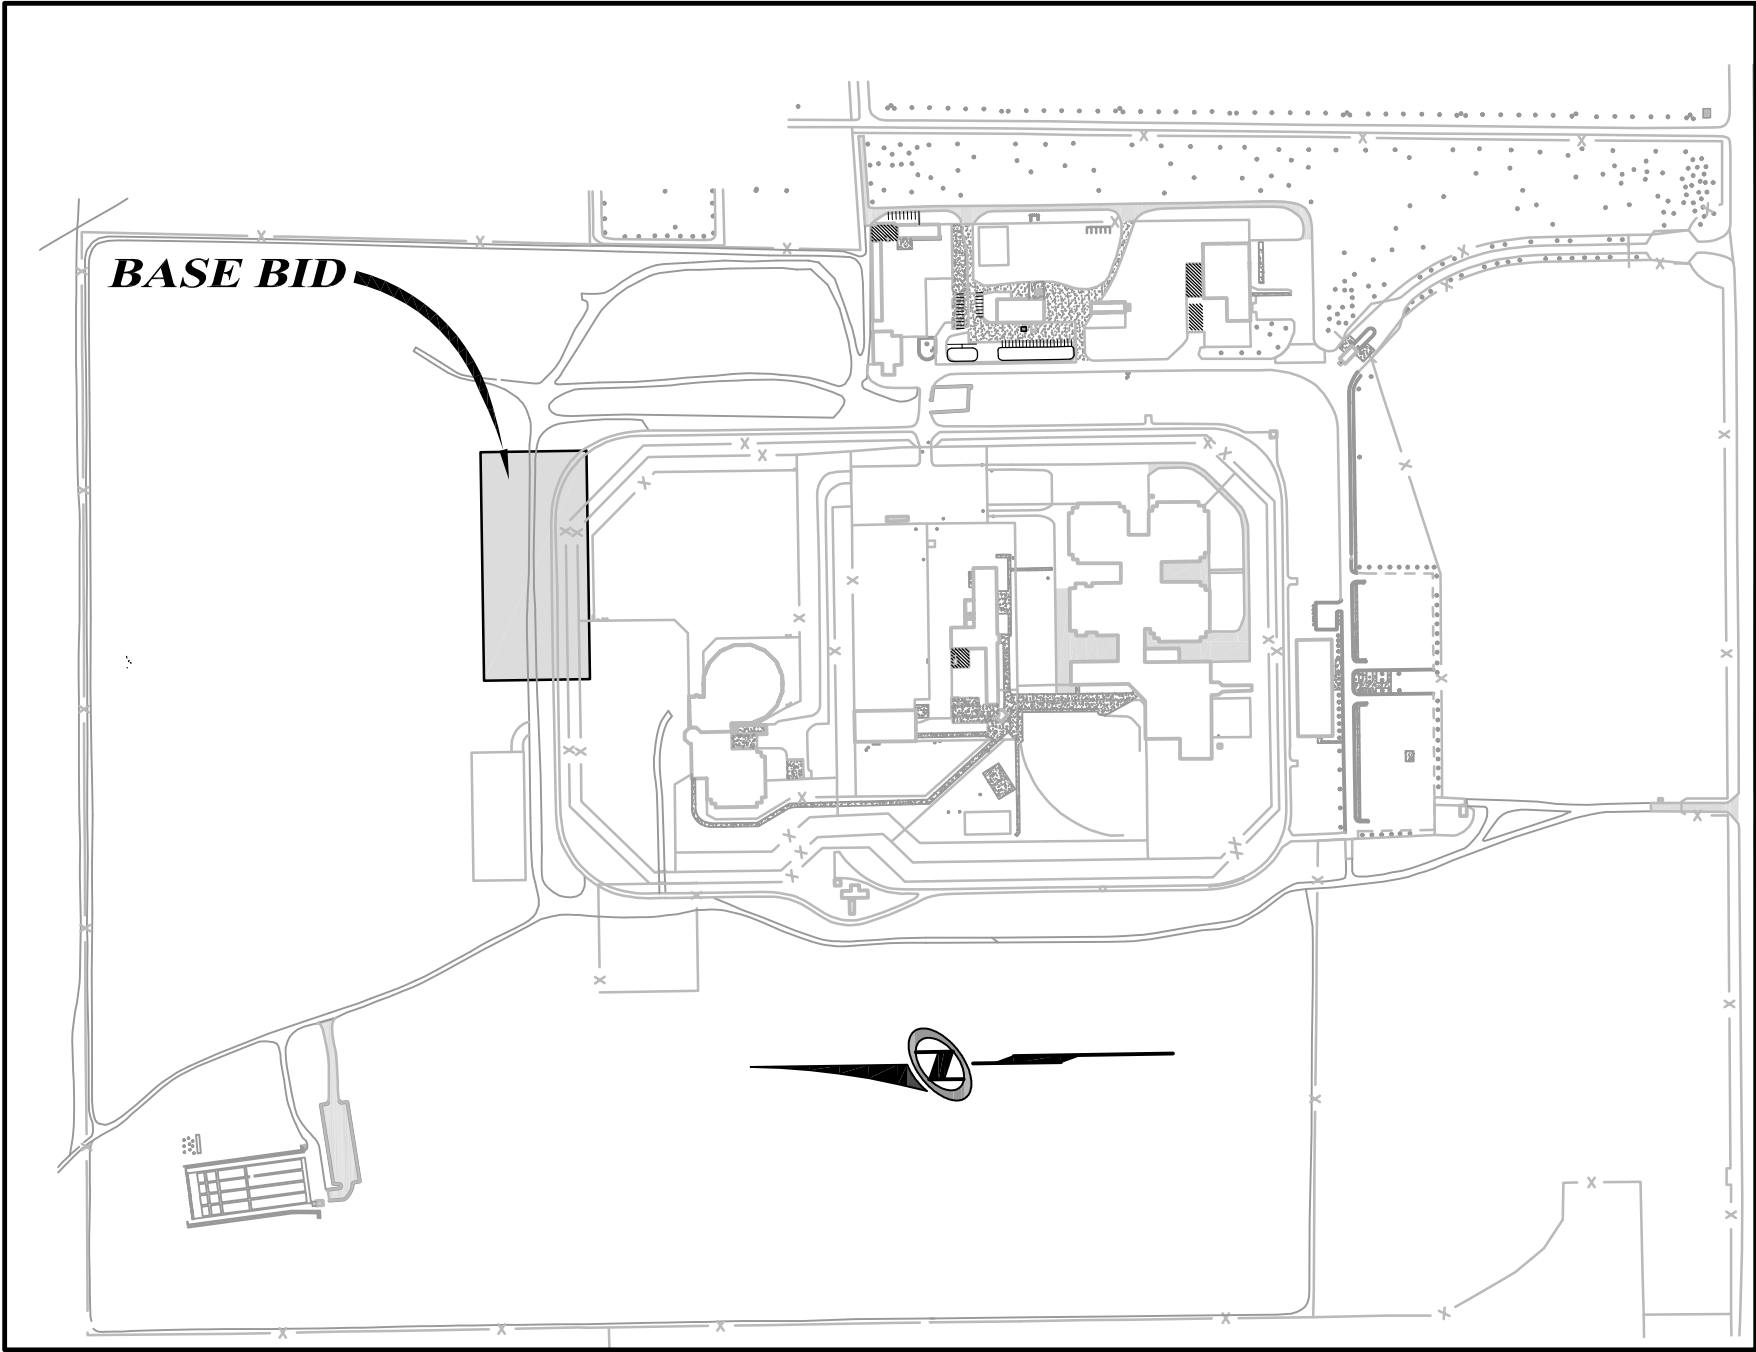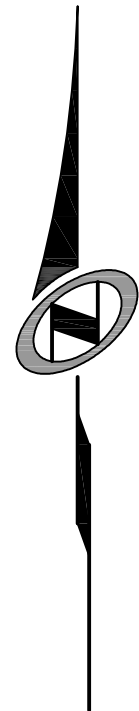

KEYMAP  
N.T.S.

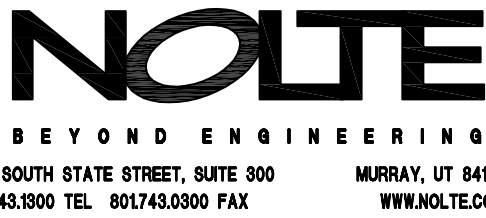

CREATED BY: NOLTE ASSOCIATES



SITE/LOCATION

CENTRAL UTAH  
CORRECTIONAL  
FACILITY  
255 EAST 300 NORTH  
GUNNISON, UTAH

PROJECT TITLE

ROADWAY  
IMPROVEMENTS

C	7/17/08	FINAL REVIEW - DFCM
B	6/26/08	90% REVIEW PLANS
A	6/12/08	CONCEPT PLANS
MARK	DATE	DESCRIPTION

ISSUE TYPE: BID SET

ISSUE DATE: JUNE 2008

DFCM PROJECT NO: 08184110

CAD PROJECT NO: SLB0495

CAD DWG FILE: IP04SP

DRAWN BY: CLN

CHK'D BY: CEM

COPYRIGHT: STATE OF UTAH

SHEET TITLE

BASE BID

SHEET NUMBER

CD104

SHEET 4 OF 9




GENERAL NOTES

1. THIS FACILITY IS IN OPERATION 24 HOURS A DAY, 7 DAYS A WEEK. CONTRACTOR TO MAINTAIN ACCESS TO ALL ROADS AND PARKING LOTS THROUGHOUT CONSTRUCTION.
2. ALL WORK SHALL BE SCHEDULED THROUGH TERRY JACOBS (435) 528-3050 OR PAUL TAYLOR (435) 528-6482.
3. CONTRACTOR TO VERIFY LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO ANY CONSTRUCTION OR EXCAVATION.
4. ALL WORK TO BE DONE ACCORDING TO LOCAL, COUNTY, STATE, AND FEDERAL GUIDELINES AS APPLICABLE, SPECIFICATION DETAILS.
5. NOTIFY OWNER 48 HOURS IN ADVANCE OF ANY WATER SHUT OFFS AND ANTICIPATED DURATION.
6. NO CHANGE IN DESIGN, LOCATION OR GRADE WILL BE MADE BY THE CONTRACTOR WITHOUT WRITTEN APPROVAL.
7. FOR EXISTING UTILITY INFORMATION AND LOCATION CONTACT PAUL TAYLOR (435) 528-6482.
8. ALL CONSTRUCTION SIGNAGE, BARRICADE, TRAFFIC CONTROL DEVICES, ETC., SHALL CONFORM TO THE LATEST EDITION OF THE M.U.C.T.D. CONTRACTOR WILL MAINTAIN SUCH SO THEY ARE PROPERLY PLACED AND VISIBLE AT ALL TIMES.
9. ALL ROAD AND PARKING STRIPING SHALL BE ACCOMPLISHED IN ACCORDANCE WITH DFCM, LOCAL, COUNTY, AND FEDERAL GUIDELINES AND THE LATEST EDITION ON THE M.U.T.C.D. AS APPLICABLE.
10. COORDINATE WITH OWNER FOR NECESSARY DEVEGATION ALONG SHOULDERS OF ROADWAY.

CONSTRUCTION NOTES

1. CONSTRUCT 22' WIDE ASPHALT ROADWAY PER PAVEMENT SECTION A/CD109 WITH 2% CROSS SLOPE FROM CENTERLINE CROWN
2. NEW ASPHALT TO MATCH EXISTING GRADE (TYP.)
3. CONSTRUCT 300 LF, 12' WIDE ASPHALT ROADWAY PER PAVEMENT SECTION B/CD109 WITH 2% CROSS SLOPE
4. ALIGN ROADWAY PARALLEL TO EXISTING PARKING LOT, LEAVING ENOUGH ROOM FOR NEW 4' SIDEWALK ADJACENT TO SOUTH EDGE OF LOT
5. CONSTRUCT 22' WIDE ASPHALT ROADWAY PER PAVEMENT SECTION B/CD109 WITH 2% CROSS SLOPE FROM CENTERLINE CROWN
6. SAW CUT (1' MIN.), TRIM, TACK AND JOIN NEW PAVEMENT TO EXISTING (TYP.)
7. PAINT 4" SOLID YELLOW CENTERLINE STRIPE

LEGEND

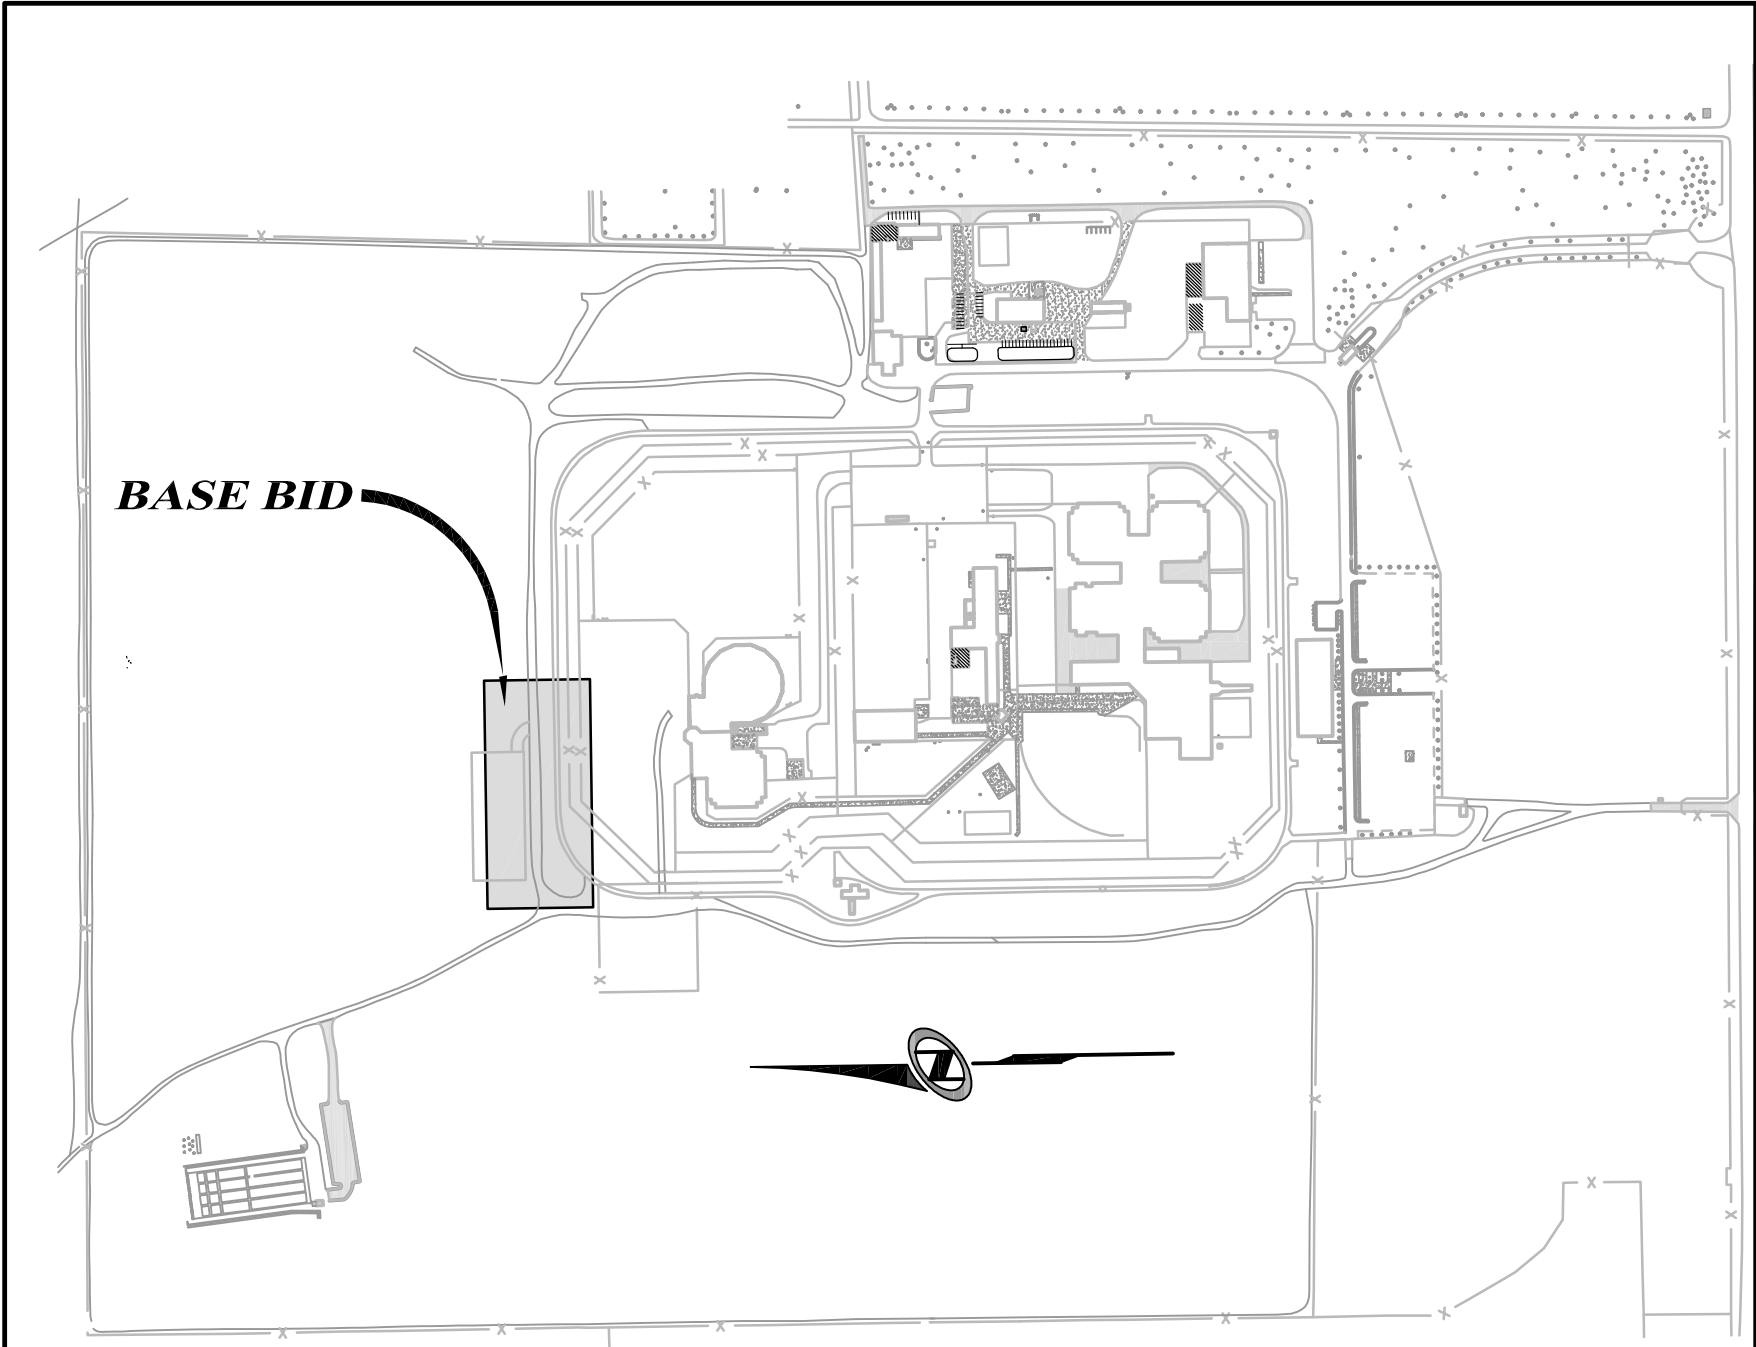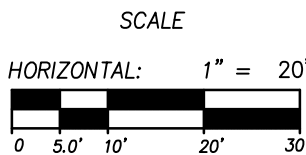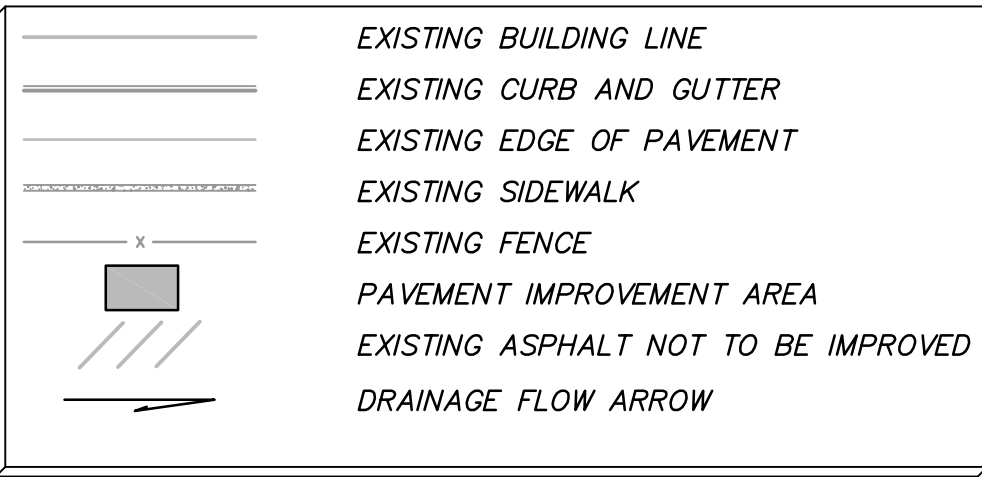


KEYMAP  
N.T.S.

EXISTING ASPHALT PARKING LOT

MATCHLINE — SEE SHEET 6

MATCHLINE — SEE SHEET 4

BASE BID

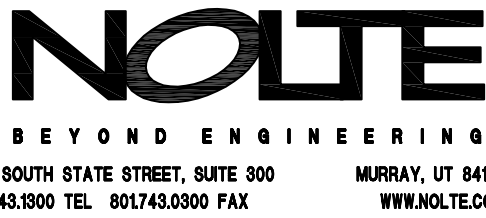

CREATED BY: NOLTE ASSOCIATES



SITE/LOCATION

CENTRAL UTAH  
CORRECTIONAL  
FACILITY  
255 EAST 300 NORTH  
GUNNISON, UTAH

PROJECT TITLE

ROADWAY  
IMPROVEMENTS

MARK	DATE	DESCRIPTION
C	7/17/08	FINAL REVIEW — DFCM
B	6/26/08	90% REVIEW PLANS
A	6/12/08	CONCEPT PLANS

ISSUE TYPE: BID SET

ISSUE DATE: JUNE 2008

DFCM PROJECT NO: 08184110

CAD PROJECT NO: SLB0495

CAD DWG FILE: IP05SP

DRAWN BY: CLN

CHK'D BY: CEM

COPYRIGHT: STATE OF UTAH

SHEET TITLE

BASE BID

SHEET NUMBER

CD105

SHEET 5 OF 9






GENERAL NOTES

1. THIS FACILITY IS IN OPERATION 24 HOURS A DAY, 7 DAYS A WEEK. CONTRACTOR TO MAINTAIN ACCESS TO ALL ROADS AND PARKING LOTS THROUGHOUT CONSTRUCTION.
2. ALL WORK SHALL BE SCHEDULED THROUGH TERRY JACOBS (435) 528-3050 OR PAUL TAYLOR (435) 528-6482.
3. CONTRACTOR TO VERIFY LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO ANY CONSTRUCTION OR EXCAVATION.
4. ALL WORK TO BE DONE ACCORDING TO LOCAL, COUNTY, STATE, AND FEDERAL GUIDELINES AS APPLICABLE, SPECIFICATION DETAILS.
5. NOTIFY OWNER 48 HOURS IN ADVANCE OF ANY WATER SHUT OFFS AND ANTICIPATED DURATION.
6. NO CHANGE IN DESIGN, LOCATION OR GRADE WILL BE MADE BY THE CONTRACTOR WITHOUT WRITTEN APPROVAL.
7. FOR EXISTING UTILITY INFORMATION AND LOCATION CONTACT PAUL TAYLOR (435) 528-6482.
8. ALL CONSTRUCTION SIGNAGE, BARRICADE, TRAFFIC CONTROL DEVICES, ETC., SHALL CONFORM TO THE LATEST EDITION OF THE M.U.C.T.D. CONTRACTOR WILL MAINTAIN SUCH SO THEY ARE PROPERLY PLACED AND VISIBLE AT ALL TIMES.
9. ALL ROAD AND PARKING STRIPING SHALL BE ACCOMPLISHED IN ACCORDANCE WITH DFCM, LOCAL, COUNTY, AND FEDERAL GUIDELINES AND THE LATEST EDITION ON THE M.U.T.C.D. AS APPLICABLE.
10. COORDINATE WITH OWNER FOR NECESSARY DEVEGATION ALONG SHOULDERS OF ROADWAY.

CONSTRUCTION NOTES



1. CONSTRUCT 22' WIDE ASPHALT ROADWAY PER PAVEMENT SECTION A/CD109 WITH 2% CROSS SLOPE FROM CENTERLINE CROWN
2. NEW ASPHALT TO MATCH EXISTING GRADE (TYP.)
3. CONSTRUCT 300 LF, 12' WIDE ASPHALT ROADWAY PER PAVEMENT SECTION B/CD109 WITH 2% CROSS SLOPE
4. ALIGN ROADWAY PARALLEL TO EXISTING PARKING LOT, LEAVING ENOUGH ROOM FOR NEW 4' SIDEWALK ADJACENT TO SOUTH EDGE OF LOT
5. CONSTRUCT 22' WIDE ASPHALT ROADWAY PER PAVEMENT SECTION B/CD109 WITH 2% CROSS SLOPE FROM CENTERLINE CROWN
6. PAINT 4" SOLID YELLOW CENTERLINE STRIPE

LEGEND

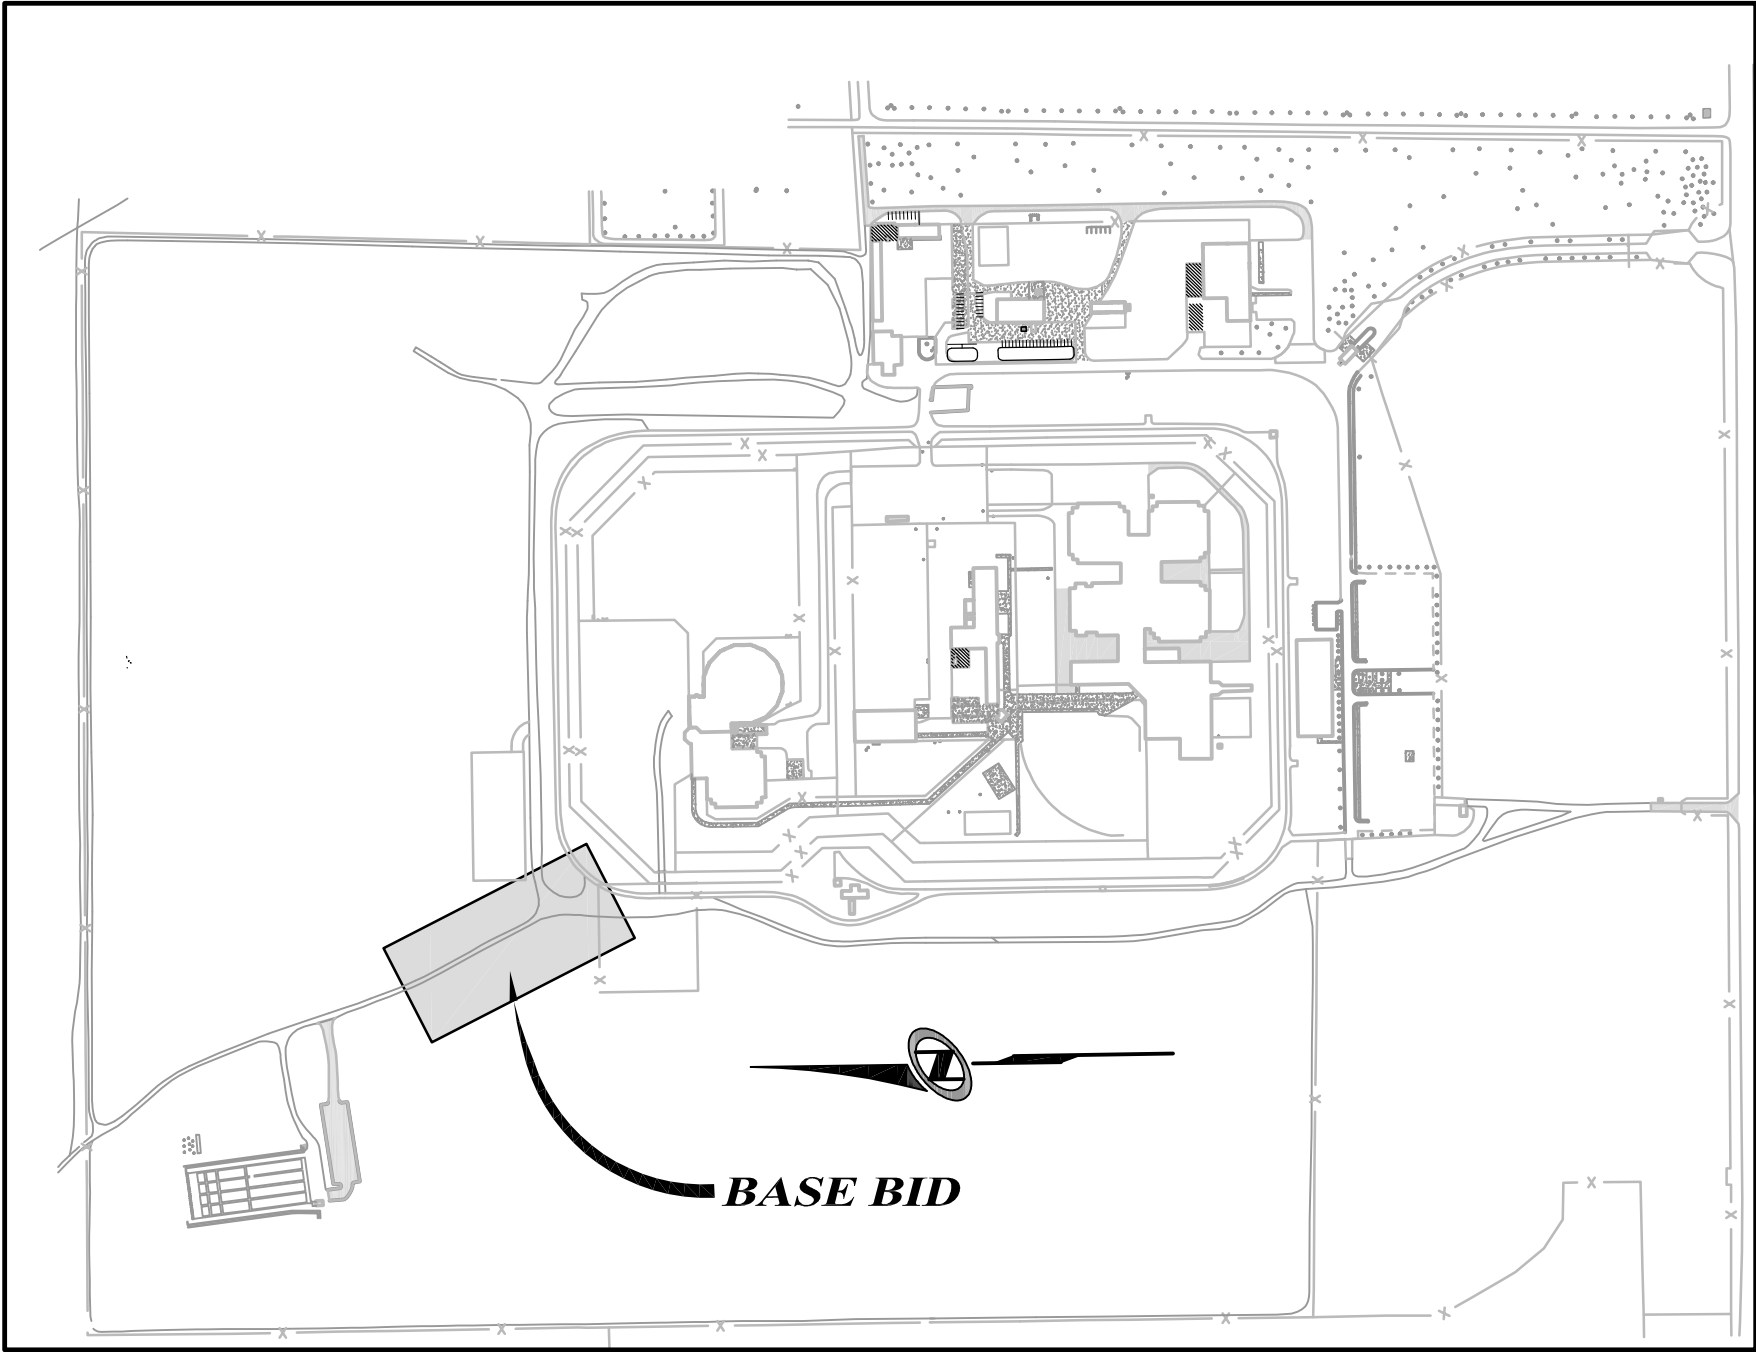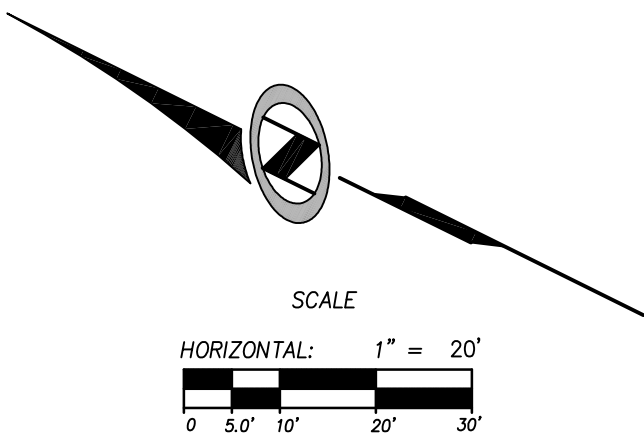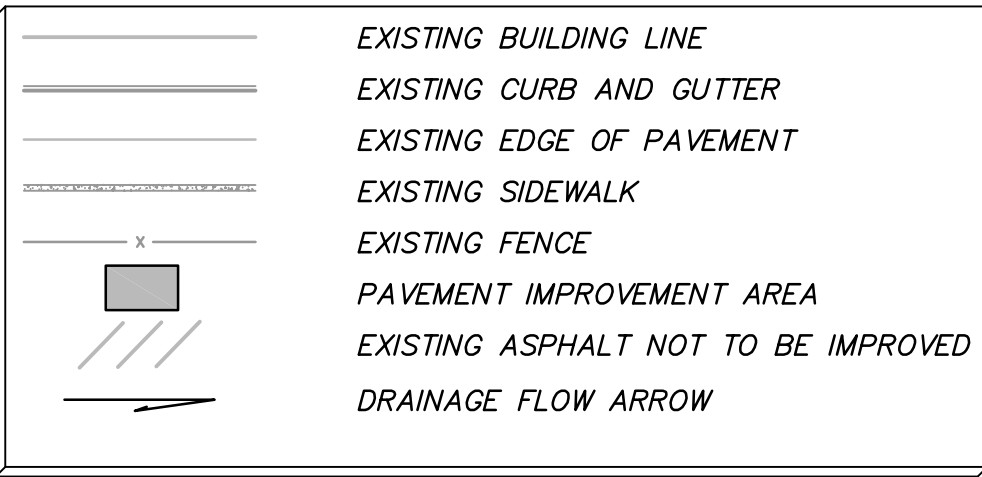

KEYMAP  
N.T.S.

MATCHLINE - SEE SHEET 5

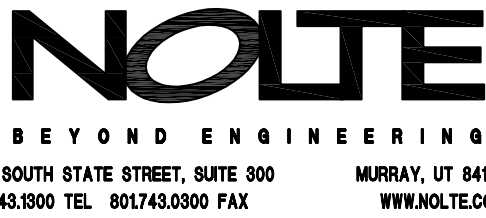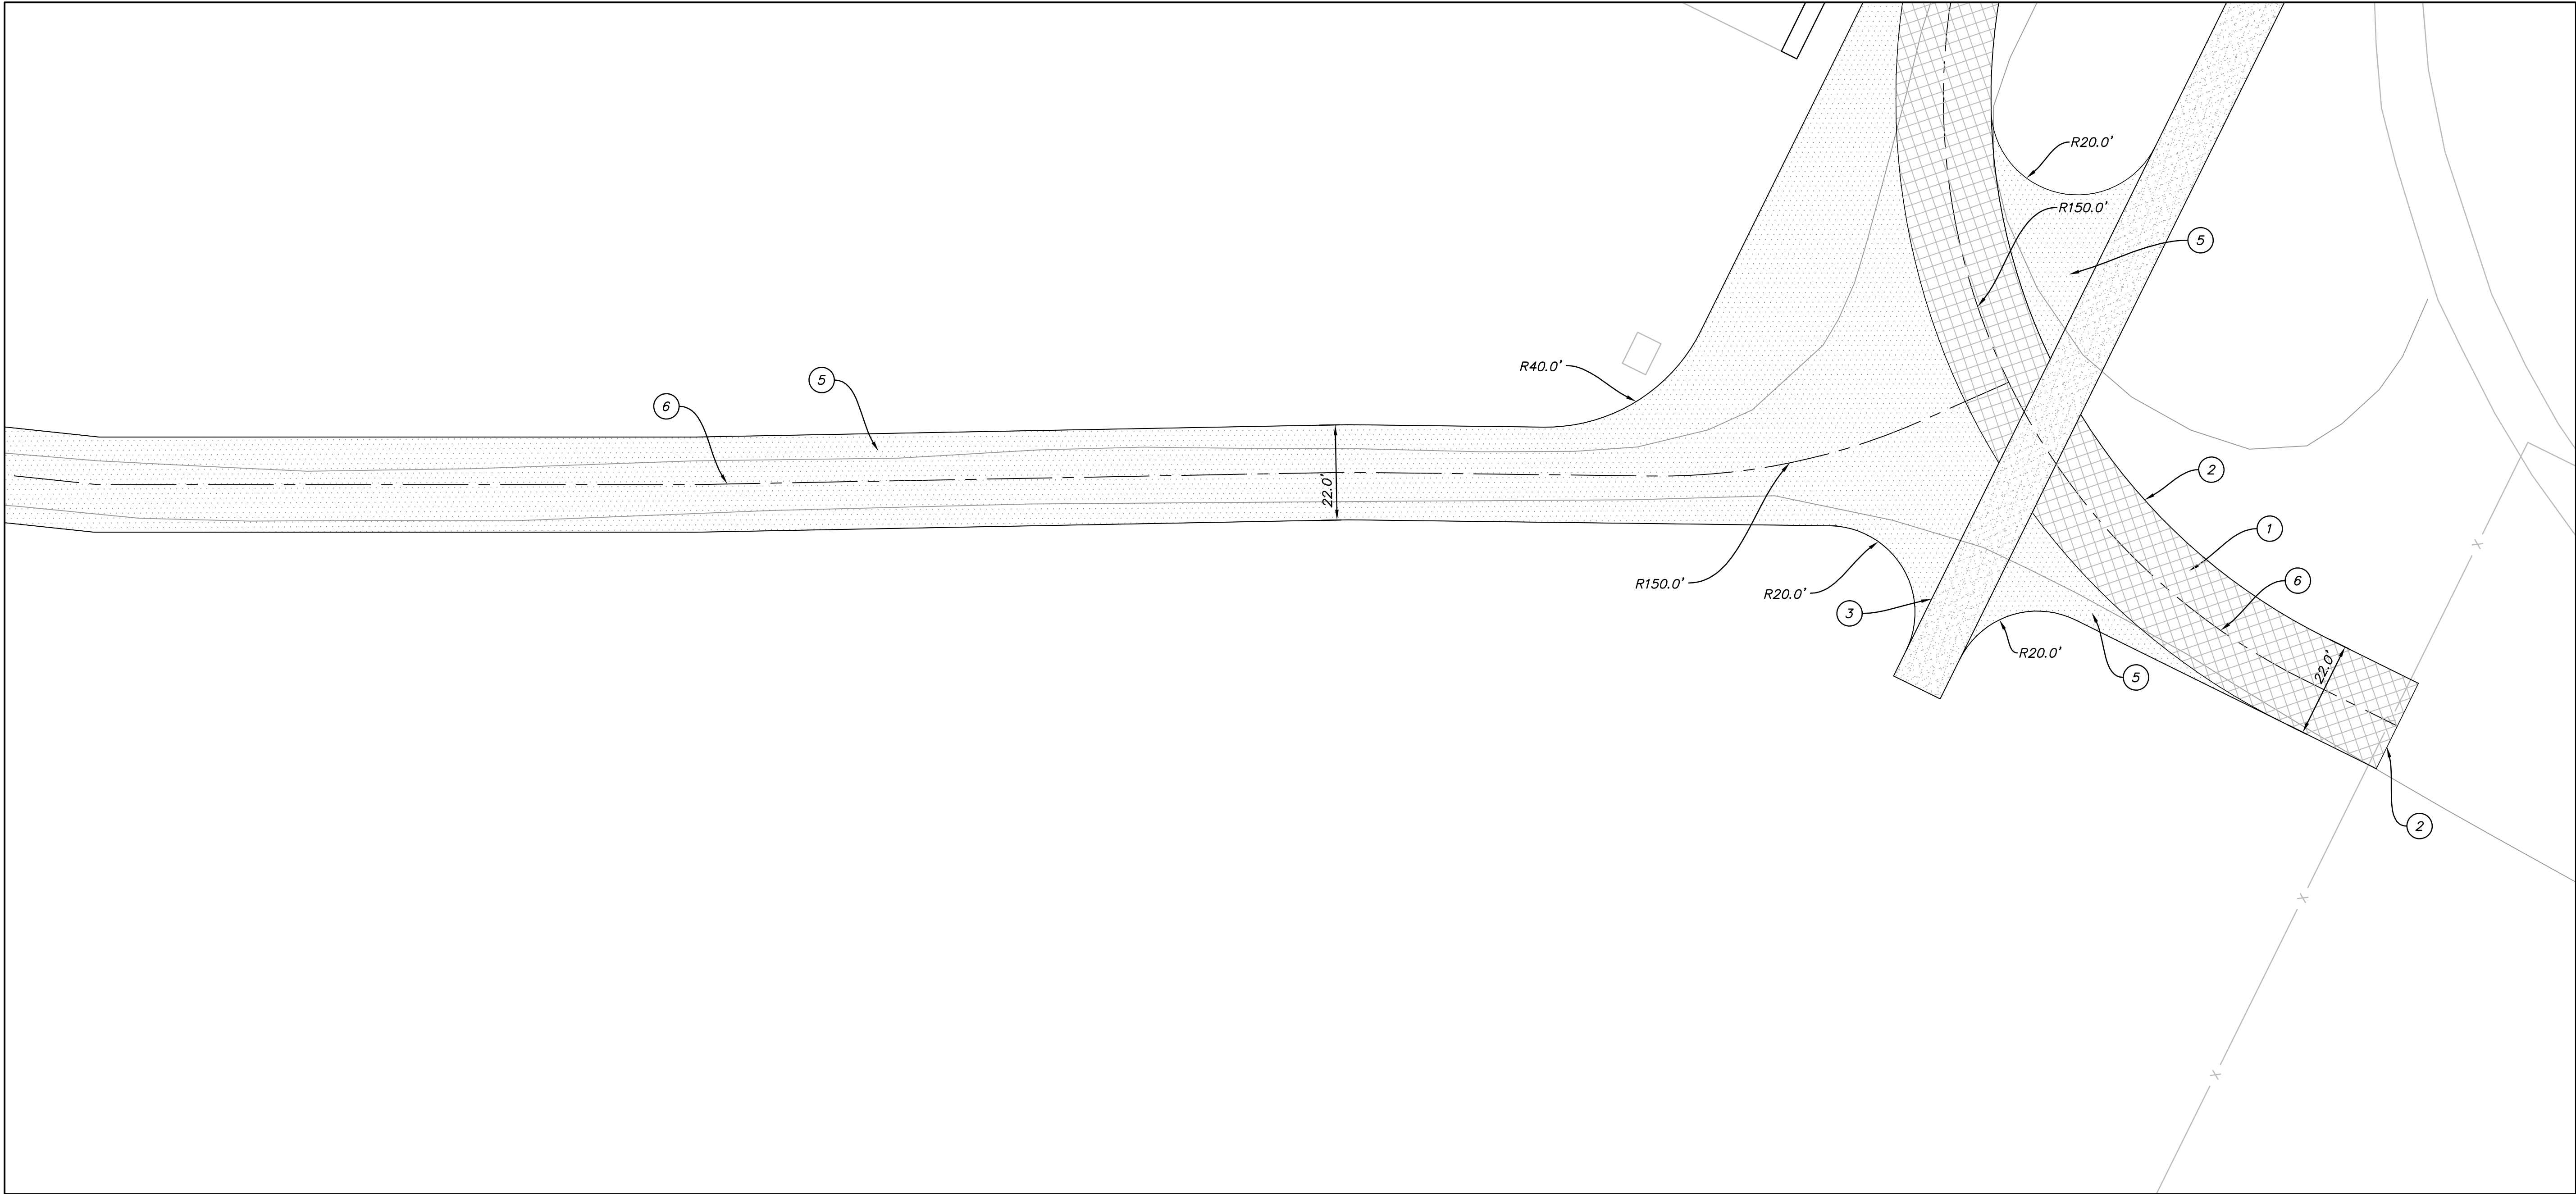

CREATED BY: NOLTE ASSOCIATES



SITE/LOCATION

CENTRAL UTAH  
CORRECTIONAL  
FACILITY  
255 EAST 300 NORTH  
GUNNISON, UTAH

PROJECT TITLE

ROADWAY  
IMPROVEMENTS

MARK	DATE	DESCRIPTION
C	7/17/08	FINAL REVIEW - DFCM
B	6/26/08	90% REVIEW PLANS
A	6/12/08	CONCEPT PLANS

ISSUE TYPE: BID SET

ISSUE DATE: JUNE 2008

DFCM PROJECT NO: 08184110

CAD PROJECT NO: SLB0495

CAD DWG FILE: IP06SP

DRAWN BY: CLN

CHK'D BY: CEM

COPYRIGHT: STATE OF UTAH

SHEET TITLE

BASE BID

SHEET NUMBER

CD106

SHEET 6 OF 9




GENERAL NOTES

1. THIS FACILITY IS IN OPERATION 24 HOURS A DAY, 7 DAYS A WEEK. CONTRACTOR TO MAINTAIN ACCESS TO ALL ROADS AND PARKING LOTS THROUGHOUT CONSTRUCTION.
2. ALL WORK SHALL BE SCHEDULED THROUGH TERRY JACOBS (435) 528-3050 OR PAUL TAYLOR (435) 528-6482.
3. CONTRACTOR TO VERIFY LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO ANY CONSTRUCTION OR EXCAVATION.
4. ALL WORK TO BE DONE ACCORDING TO LOCAL, COUNTY, STATE, AND FEDERAL GUIDELINES AS APPLICABLE, SPECIFICATION DETAILS.
5. NOTIFY OWNER 48 HOURS IN ADVANCE OF ANY WATER SHUT OFFS AND ANTICIPATED DURATION.
6. NO CHANGE IN DESIGN, LOCATION OR GRADE WILL BE MADE BY THE CONTRACTOR WITHOUT WRITTEN APPROVAL.
7. FOR EXISTING UTILITY INFORMATION AND LOCATION CONTACT PAUL TAYLOR (435) 528-6482.
8. ALL CONSTRUCTION SIGNAGE, BARRICADE, TRAFFIC CONTROL DEVICES, ETC., SHALL CONFORM TO THE LATEST EDITION OF THE M.U.C.T.D. CONTRACTOR WILL MAINTAIN SUCH SO THEY ARE PROPERLY PLACED AND VISIBLE AT ALL TIMES.
9. ALL ROAD AND PARKING STRIPING SHALL BE ACCOMPLISHED IN ACCORDANCE WITH DFCM, LOCAL, COUNTY, AND FEDERAL GUIDELINES AND THE LATEST EDITION ON THE M.U.T.C.D. AS APPLICABLE.
10. COORDINATE WITH OWNER FOR NECESSARY DEVEGITATION ALONG SHOULDERS OF ROADWAY.


CONSTRUCTION NOTES

1. CONSTRUCT 22' WIDE ASPHALT ROADWAY PER PAVEMENT SECTION B/CD109 WITH 2% CROSS SLOPE FROM CENTERLINE CROWN
2. NEW ASPHALT TO MATCH EXISTING GRADE (TYP.)
3. BASE BID, ALTERNATE BID LIMIT LINE
4. SAW CUT (1' MIN.), TRIM, TACK AND JOIN NEW PAVEMENT TO EXISTING (TYP.)
5. PAINT 4" SOLID YELLOW CENTERLINE STRIPE

LEGEND

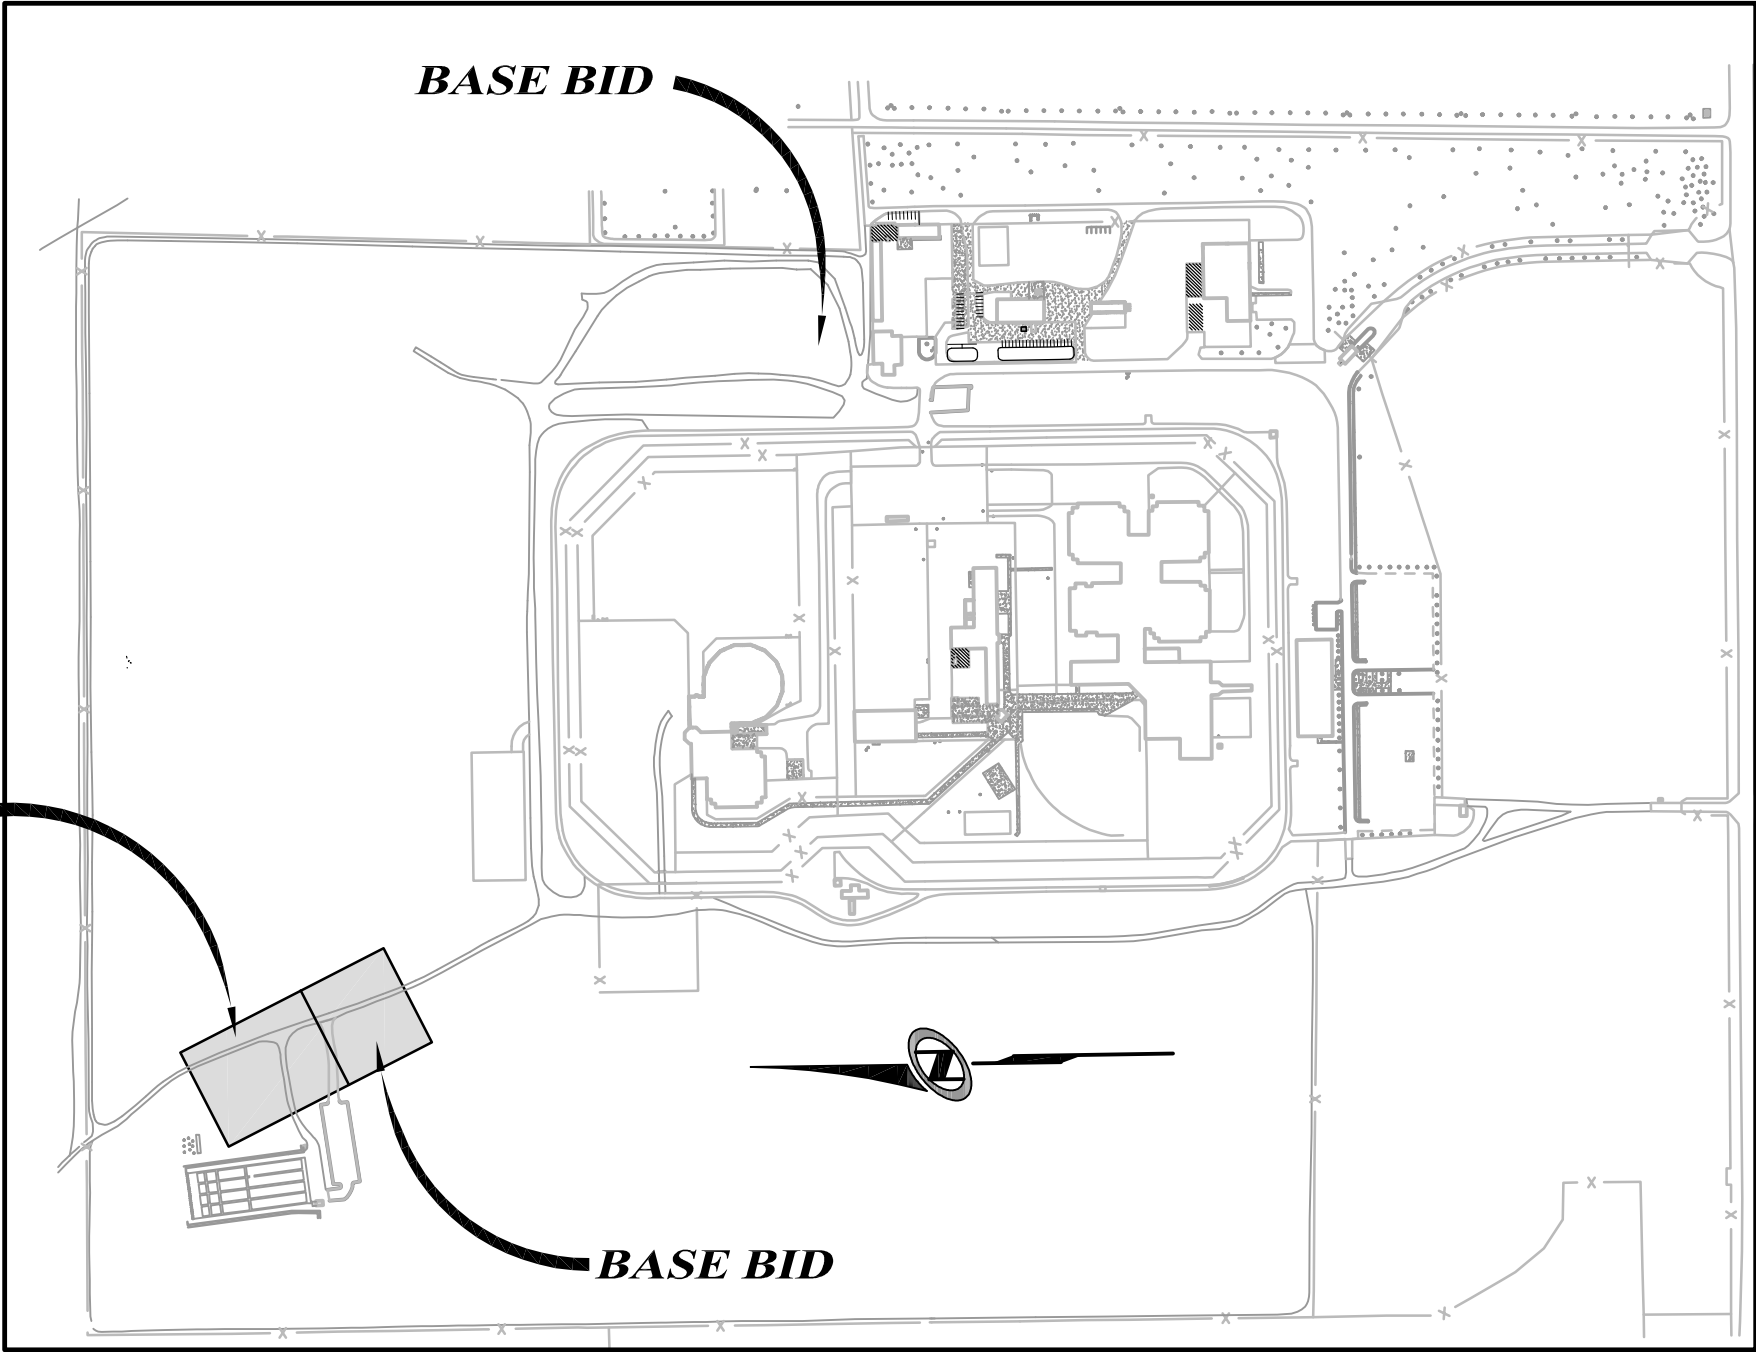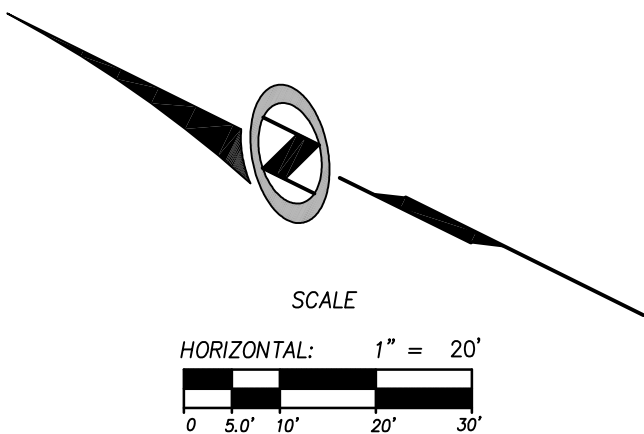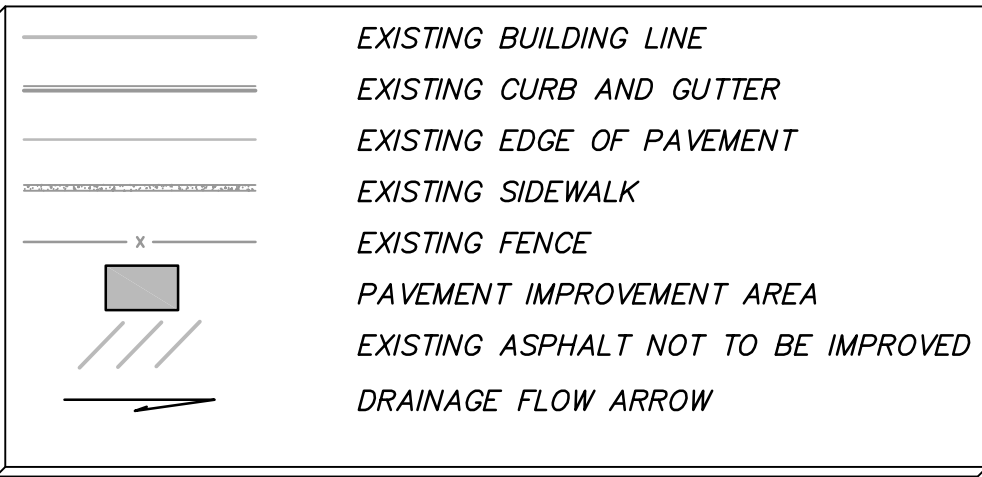


KEYMAP  
N.T.S.

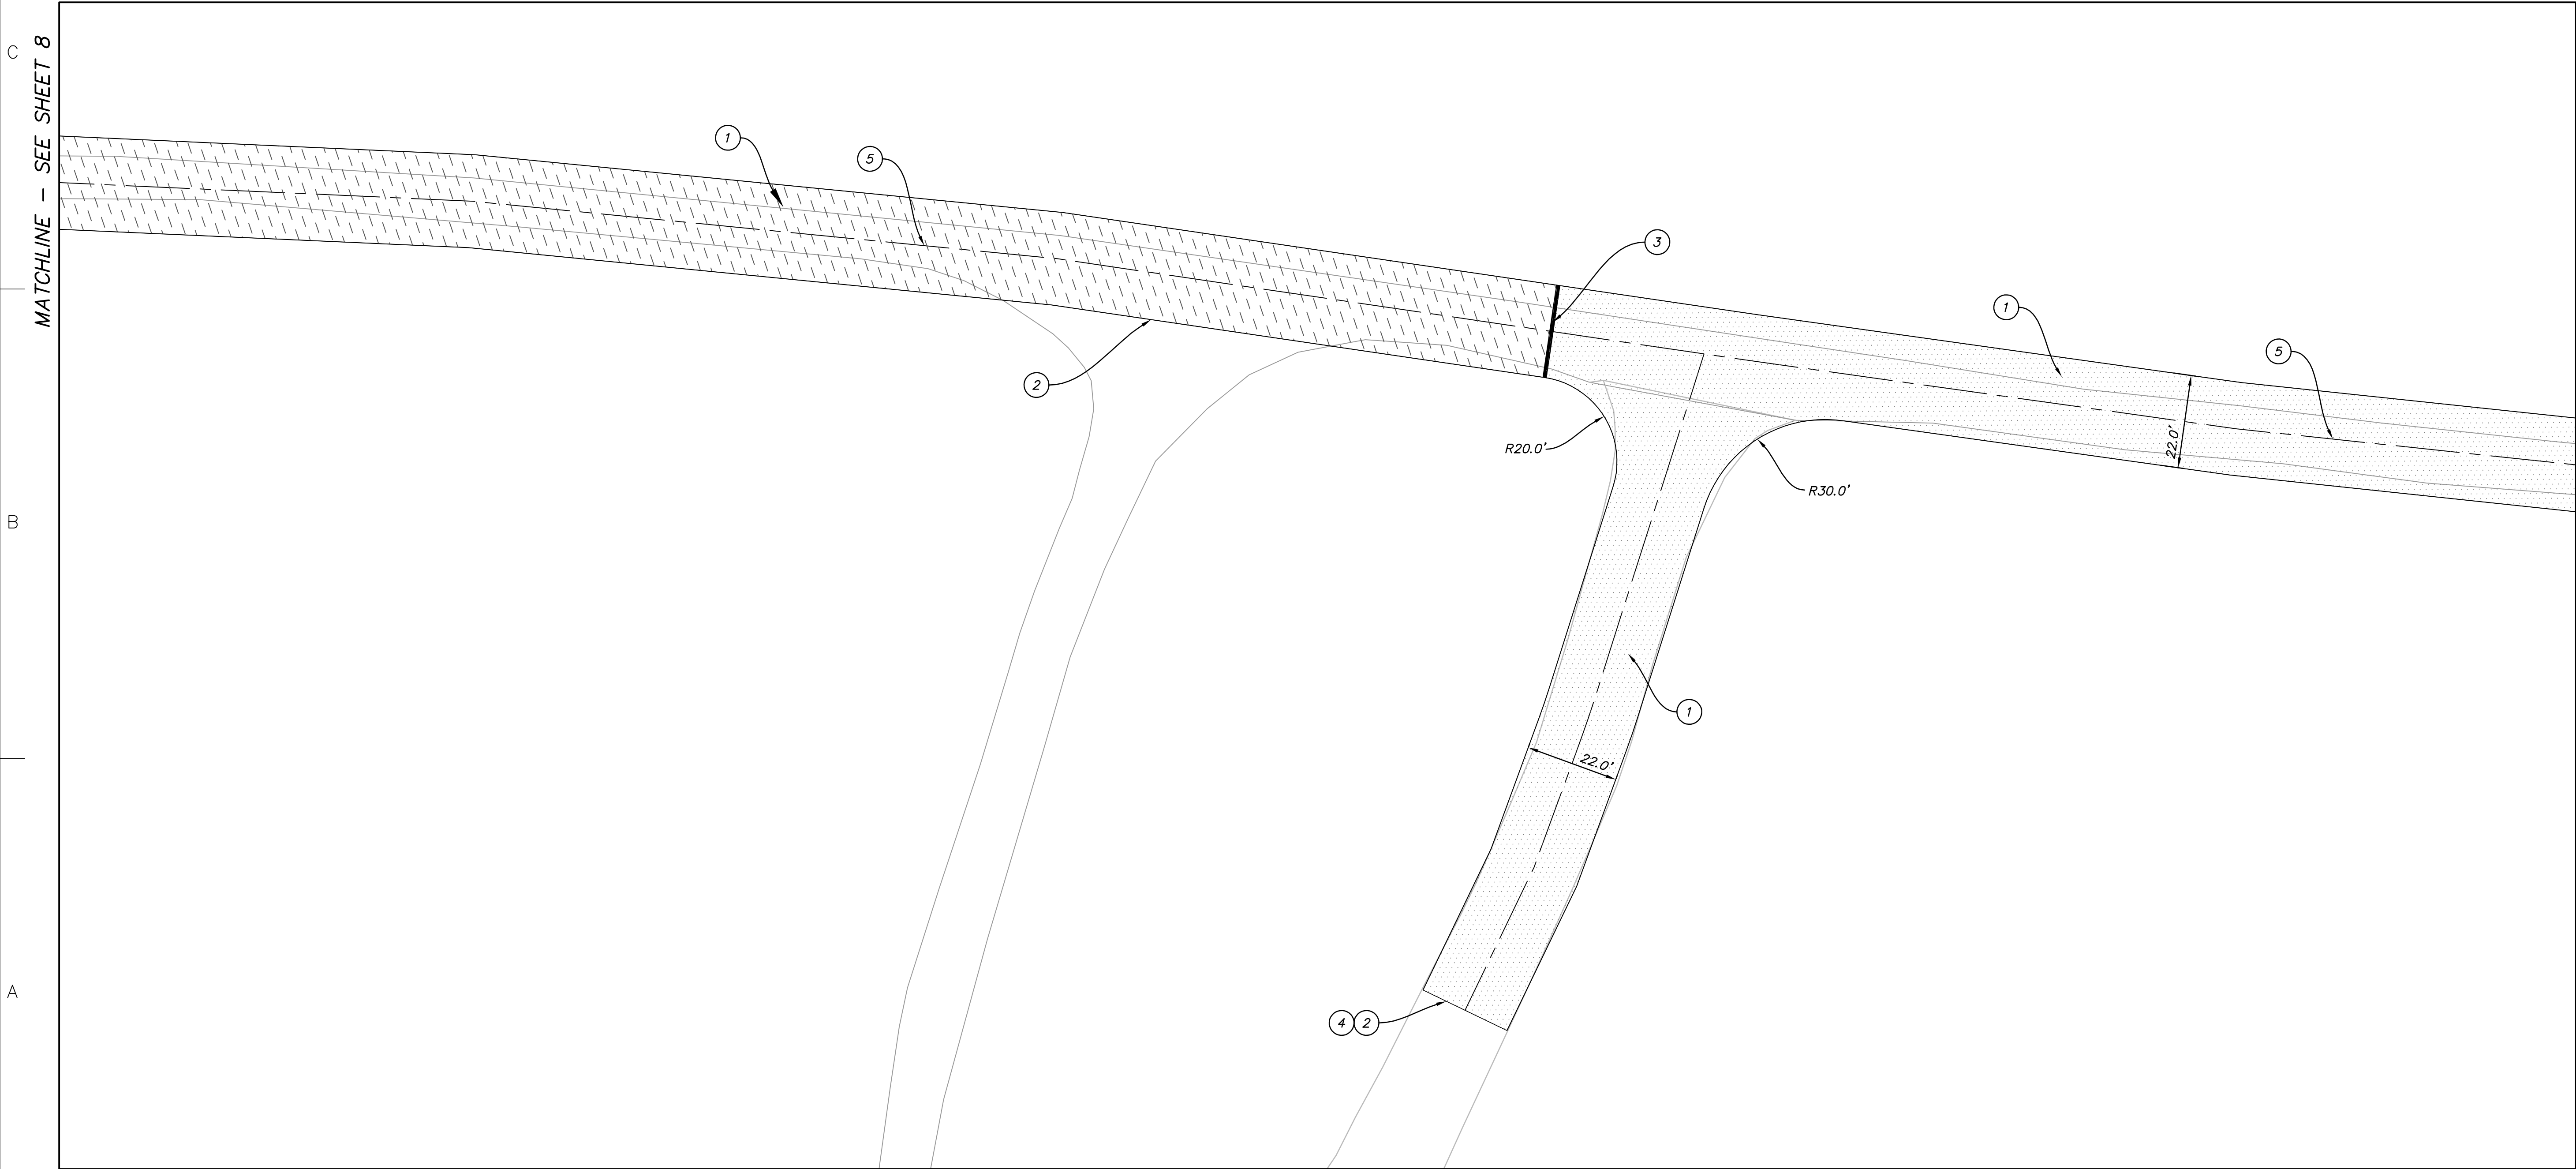

ALTERNATE BID

BASE BID

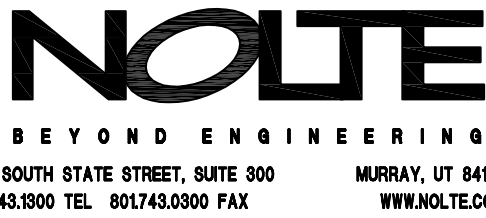

CREATED BY: NOLTE ASSOCIATES



SITE/LOCATION

CENTRAL UTAH  
CORRECTIONAL  
FACILITY  
255 EAST 300 NORTH  
GUNNISON, UTAH

PROJECT TITLE

ROADWAY  
IMPROVEMENTS

C	7/17/08	FINAL REVIEW - DFCM
B	6/26/08	90% REVIEW PLANS
A	6/12/08	CONCEPT PLANS

MARK DATE DESCRIPTION

ISSUE TYPE: BID SET

ISSUE DATE: JUNE 2008

DFCM PROJECT NO: 08184110

CAD PROJECT NO: SLB0495

CAD DWG FILE: IP07SP

DRAWN BY: CLN

CHK'D BY: CEM

COPYRIGHT: STATE OF UTAH

SHEET TITLE

BASE BID /  
ALTERNATE BID

SHEET NUMBER

CD107

SHEET 7 OF 9




GENERAL NOTES

1. THIS FACILITY IS IN OPERATION 24 HOURS A DAY, 7 DAYS A WEEK. CONTRACTOR TO MAINTAIN ACCESS TO ALL ROADS AND PARKING LOTS THROUGHOUT CONSTRUCTION.
2. ALL WORK SHALL BE SCHEDULED THROUGH TERRY JACOBS (435) 528-3050 OR PAUL TAYLOR (435) 528-6482.
3. CONTRACTOR TO VERIFY LOCATION AND DEPTH OF ALL UTILITIES PRIOR TO ANY CONSTRUCTION OR EXCAVATION.
4. ALL WORK TO BE DONE ACCORDING TO LOCAL, COUNTY, STATE, AND FEDERAL GUIDELINES AS APPLICABLE, SPECIFICATION DETAILS.
5. NOTIFY OWNER 48 HOURS IN ADVANCE OF ANY WATER SHUT OFFS AND ANTICIPATED DURATION.
6. NO CHANGE IN DESIGN, LOCATION OR GRADE WILL BE MADE BY THE CONTRACTOR WITHOUT WRITTEN APPROVAL.
7. FOR EXISTING UTILITY INFORMATION AND LOCATION CONTACT PAUL TAYLOR (435) 528-6482.
8. ALL CONSTRUCTION SIGNAGE, BARRICADE, TRAFFIC CONTROL DEVICES, ETC., SHALL CONFORM TO THE LATEST EDITION OF THE M.U.C.T.D. CONTRACTOR WILL MAINTAIN SUCH SO THEY ARE PROPERLY PLACED AND VISIBLE AT ALL TIMES.
9. ALL ROAD AND PARKING STRIPING SHALL BE ACCOMPLISHED IN ACCORDANCE WITH DFCM, LOCAL, COUNTY, AND FEDERAL GUIDELINES AND THE LATEST EDITION ON THE M.U.T.C.D. AS APPLICABLE.
10. COORDINATE WITH OWNER FOR NECESSARY DEVEGATION ALONG SHOULDERS OF ROADWAY.


CONSTRUCTION NOTES

1. CONSTRUCT 22' WIDE ASPHALT ROADWAY PER PAVEMENT SECTION B/CD109 WITH 2% CROSS SLOPE FROM CENTERLINE CROWN
2. NEW ASPHALT TO MATCH EXISTING GRADE (TYP.)
3. CONSTRUCT ASPHALT PARKING LOT PER PAVEMENT SECTION B/CD109, SLOPE TO DRAIN, 2.00% MIN, EXCEPT IN DISABLED PARKING STALL, SEE NOTE 5 BELOW
4. 4" WHITE PARKING STALL STRIPES (SEE CONSTR. NOTE 9)
5. VAN ACCESSIBLE DISABLED PARKING STALL MARKING, SLOPE TO DRAIN, 0.50% MIN, 2.00% MAX.
6. VAN ACCESSIBLE DISABLED PARKING SIGN, SEE DETAIL D/CD109
7. CONSTRUCT 4' WIDE ADA COMPLIANT ASPHALT SIDEWALK TO CONNECT ACCESSIBLE PARKING TO EXISTING CONCRETE PAD, SECTION B/CD109, SLOPE TO DRAIN, 5.00% MAX.
8. PAINT 4" SOLID YELLOW CENTERLINE STRIPE


LEGEND

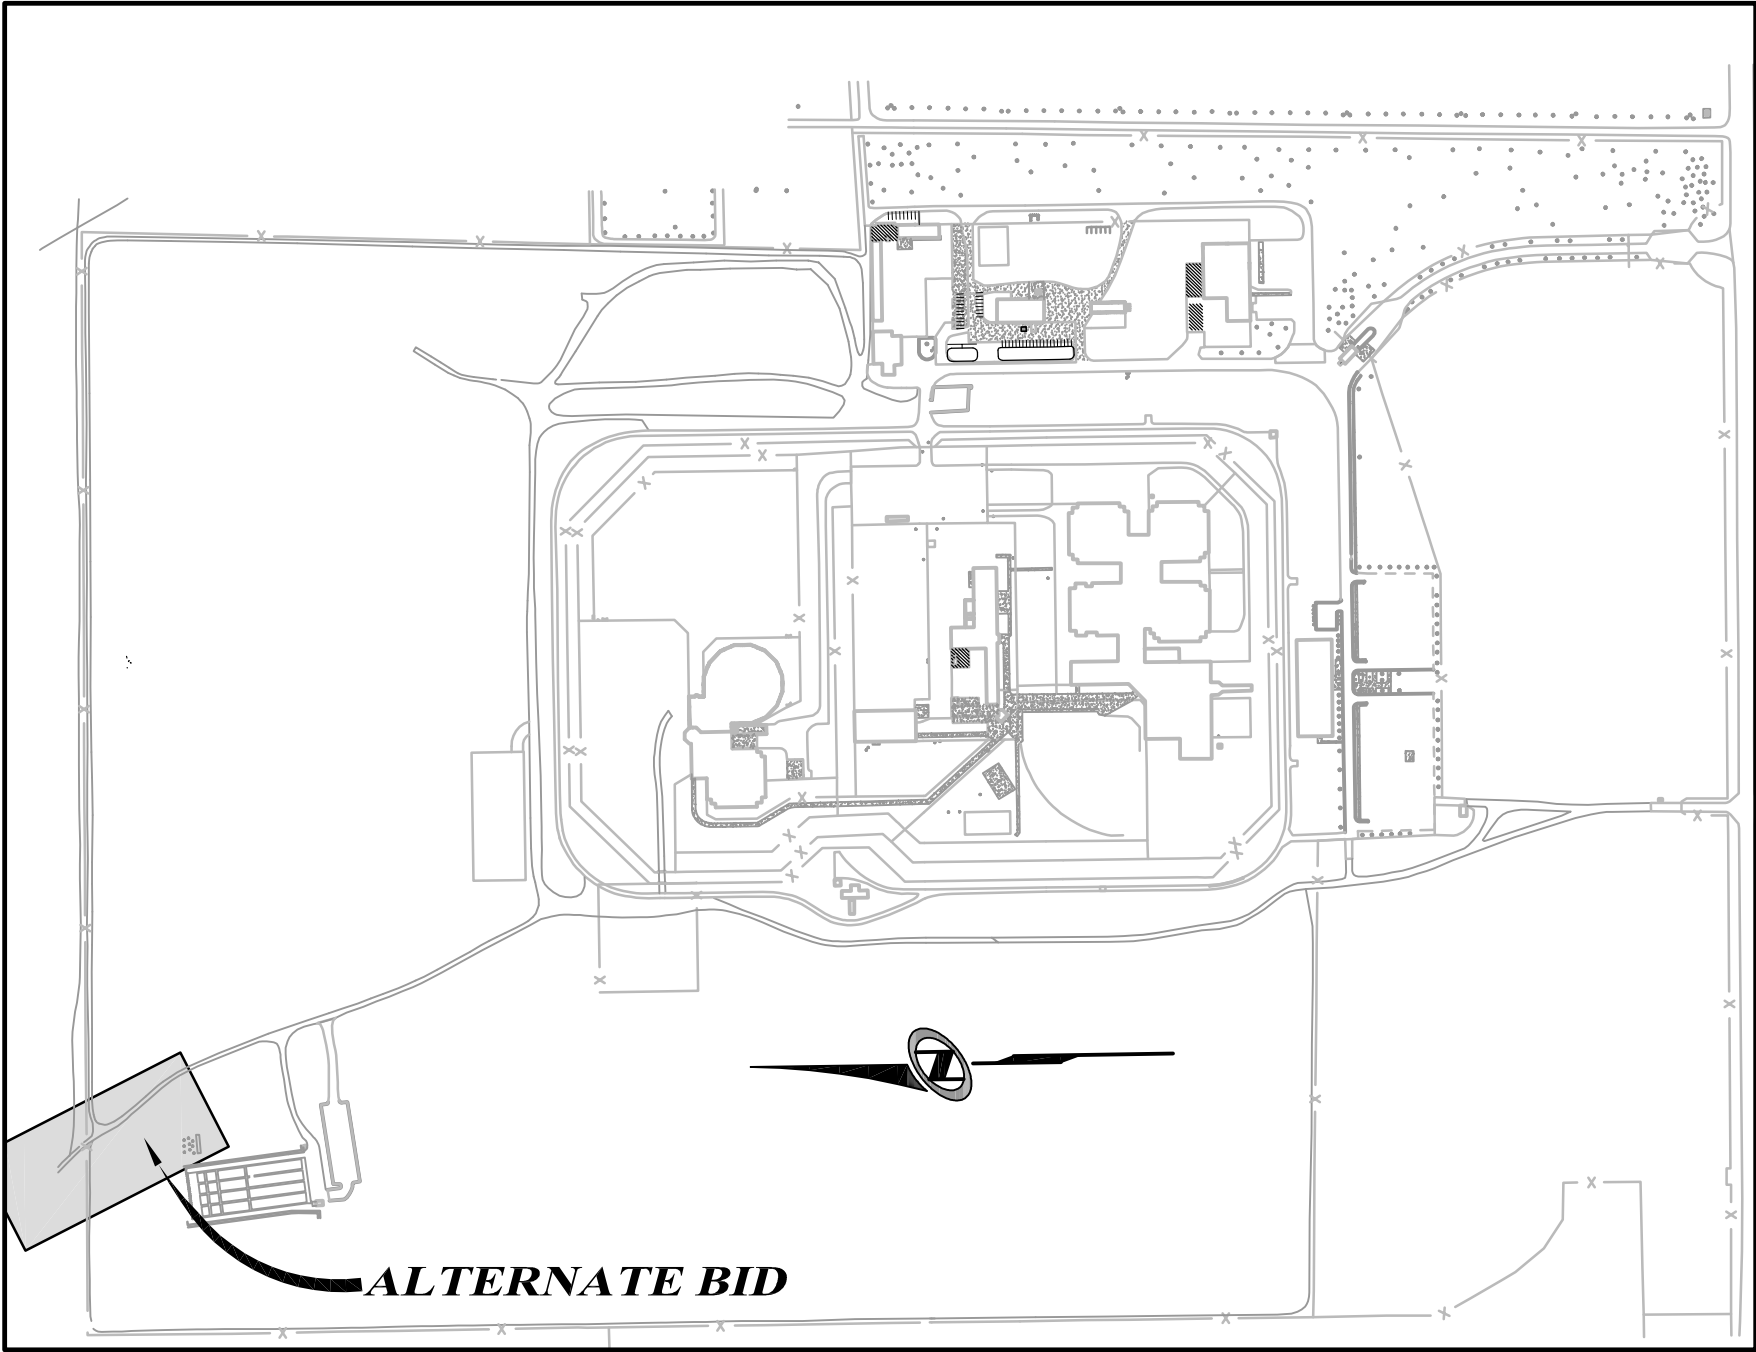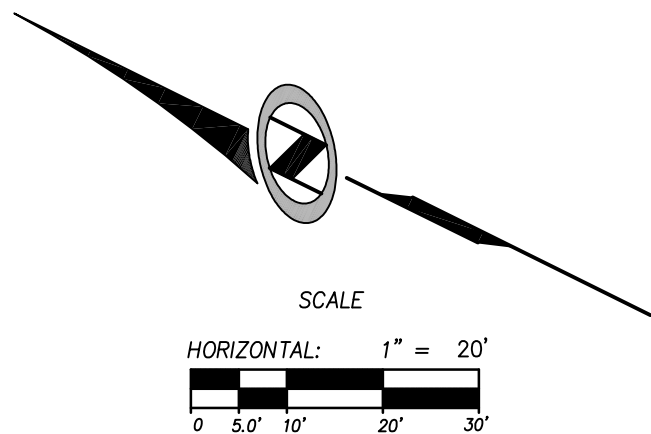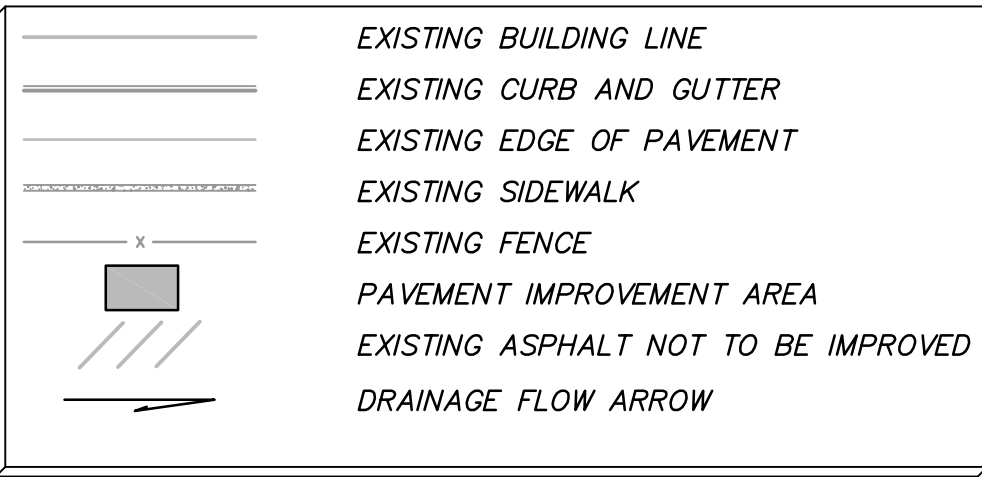


KEYMAP  
N.T.S.

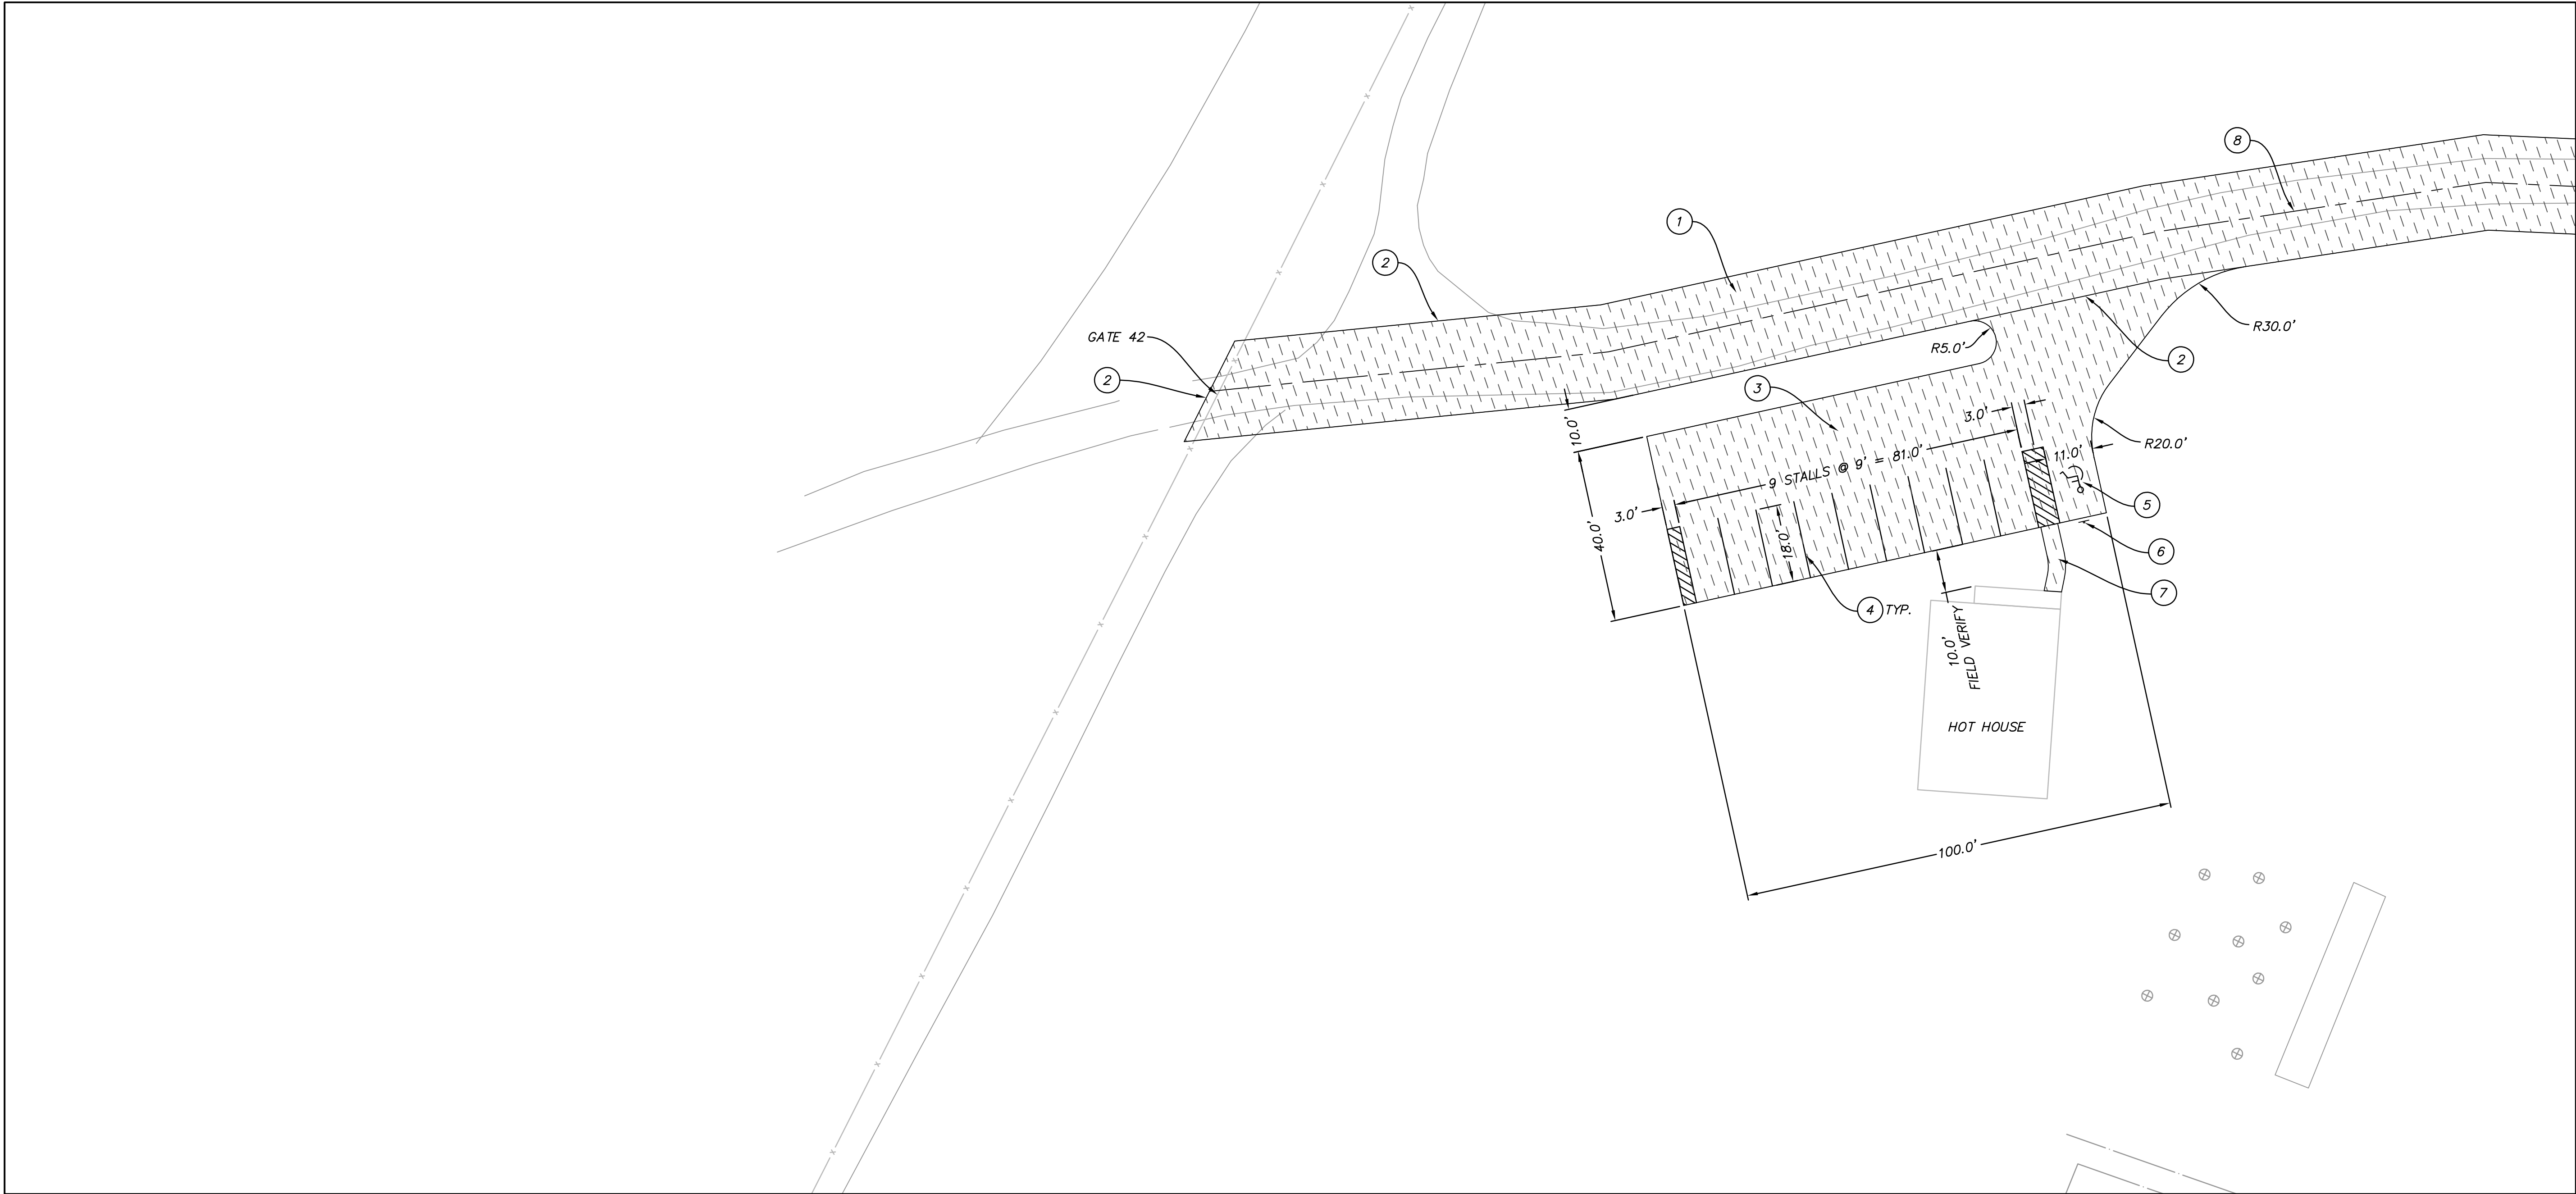

BASE BID

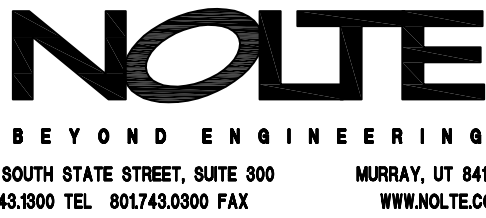

CREATED BY: NOLTE ASSOCIATES

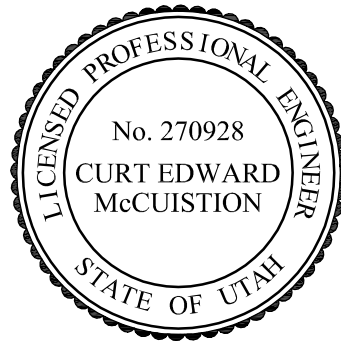

SITE/LOCATION

CENTRAL UTAH  
CORRECTIONAL  
FACILITY  
255 EAST 300 NORTH  
GUNNISON, UTAH

PROJECT TITLE

ROADWAY  
IMPROVEMENTS

C	7/17/08	FINAL REVIEW - DFCM
B	6/26/08	90% REVIEW PLANS
A	6/12/08	CONCEPT PLANS

MARK DATE DESCRIPTION

ISSUE TYPE: BID SET

ISSUE DATE: JUNE 2008

DFCM PROJECT NO: 08184110

CAD PROJECT NO: SLB0495

CAD DWG FILE: IP08SP

DRAWN BY: CLN

CHK'D BY: CEM

COPYRIGHT: STATE OF UTAH

SHEET TITLE

ALTERNATE BID

SHEET NUMBER

CD108

SHEET 8 OF 9








C



A

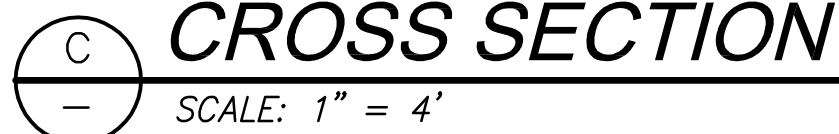

PROJECT TITLE

--	--

ISSUE TYPE: BID SET

ISSUE DATE: JUNE 2008

DFCM PROJECT NO: 08184110

CAD PROJECT NO: SLB0495

CAD DWG FILE: IP09DT

DRAWN BY: CLM

CHK'D BY: CEM

COPYRIGHT: S

SHEET NUMBER

CD109

SHEET 9 OF 9